

Nokia Customer Care

Service Manual

RM-801; RM-819 (Nokia Lumia 800; L3 & L4)

Mobile Terminal

Part No: (Issue 1)

COMPANY CONFIDENTIAL



Amendment Record Sheet

Amendment No	Date	Inserted By	Comments
Issue 1	11/11/2011	Serena Chen	

(This page left intentionally blank.)

Copyright

Copyright © 2011 Nokia. All rights reserved.

Reproduction, transfer, distribution or storage of part or all of the contents in this document in any form without the prior written permission of Nokia is prohibited.

Nokia, Nokia Connecting People, and Nokia X and Y are trademarks or registered trademarks of Nokia Corporation. Other product and company names mentioned herein may be trademarks or tradenames of their respective owners.

Nokia operates a policy of continuous development. Nokia reserves the right to make changes and improvements to any of the products described in this document without prior notice.

Under no circumstances shall Nokia be responsible for any loss of data or income or any special, incidental, consequential or indirect damages howsoever caused.

The contents of this document are provided "as is". Except as required by applicable law, no warranties of any kind, either express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, are made in relation to the accuracy, reliability or contents of this document. Nokia reserves the right to revise this document or withdraw it at any time without prior notice.

The availability of particular products may vary by region.

IMPORTANT

This document is intended for use by qualified service personnel only.

Warnings and Cautions

Warnings

- IF THE DEVICE CAN BE INSTALLED IN A VEHICLE, CARE MUST BE TAKEN ON INSTALLATION IN VEHICLES FITTED WITH ELECTRONIC ENGINE MANAGEMENT SYSTEMS AND ANTI-SKID BRAKING SYSTEMS. UNDER CERTAIN FAULT CONDITIONS, EMITTED RF ENERGY CAN AFFECT THEIR OPERATION. IF NECESSARY, CONSULT THE VEHICLE DEALER/ MANUFACTURER TO DETERMINE THE IMMUNITY OF VEHICLE ELECTRONIC SYSTEMS TO RF ENERGY.
- THE PRODUCT MUST NOT BE OPERATED IN AREAS LIKELY TO CONTAIN POTENTIALLY EXPLOSIVE ATMOSPHERES, FOR EXAMPLE, PETROL STATIONS (SERVICE STATIONS), BLASTING AREAS ETC.
- OPERATION OF ANY RADIO TRANSMITTING EQUIPMENT, INCLUDING CELLULAR TELEPHONES, MAY INTERFERE WITH THE FUNCTIONALITY OF INADEQUATELY PROTECTED MEDICAL DEVICES. CONSULT A PHYSICIAN OR THE MANUFACTURER OF THE MEDICAL DEVICE IF YOU HAVE ANY QUESTIONS. OTHER ELECTRONIC EQUIPMENT MAY ALSO BE SUBJECT TO INTERFERENCE.
- BEFORE MAKING ANY TEST CONNECTIONS, MAKE SURE YOU HAVE SWITCHED OFF ALL EQUIPMENT.

Cautions

- Servicing and alignment must be undertaken by qualified personnel only.
- Ensure all work is carried out at an anti-static workstation and that an anti-static wrist strap is worn.
- Ensure solder, wire, or foreign matter does not enter the telephone as damage may result.
- Use only approved components as specified in the parts list.
- Ensure all components, modules, screws and insulators are correctly re-fitted after servicing and alignment.
- Ensure all cables and wires are repositioned correctly.
- Never test a mobile phone WCDMA transmitter with full Tx power, if there is no possibility to perform the measurements in a good performance RF-shielded room. Even low power WCDMA transmitters may disturb nearby WCDMA networks and cause problems to 3G cellular phone communication in a wide area.
- During testing never activate the WCDMA transmitter without a proper antenna load, otherwise WCDMA PA may be damaged.

For Your Safety

QUALIFIED SERVICE

Only qualified personnel may install or repair phone equipment.

ACCESSORIES AND BATTERIES

Use only approved accessories and batteries. Do not connect incompatible products.

CONNECTION TO OTHER DEVICES

When connecting to any other device, read its user's guide for detailed safety instructions. Do not connect incompatible products.

Care and Maintenance

- This product is of superior design and craftsmanship and should be treated with care. The suggestions below will help you to fulfill any warranty obligations and to enjoy this product for many years.
- Keep the phone and all its parts and accessories out of the reach of small children.
- Keep the phone dry. Precipitation, humidity and all types of liquids or moisture can contain minerals that will corrode electronic circuits.
- Do not use or store the phone in dusty, dirty areas. Its moving parts can be damaged.
- Do not store the phone in hot areas. High temperatures can shorten the life of electronic devices, damage batteries, and warp or melt certain plastics.
- Do not store the phone in cold areas. When it warms up (to its normal temperature), moisture can form inside, which may damage electronic circuit boards.
- Do not drop, knock or shake the phone. Rough handling can break internal circuit boards.
- Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the phone.
- Do not paint the phone. Paint can clog the moving parts and prevent proper operation.
- Use only the supplied or an approved replacement antenna. Unauthorized antennas, modifications or attachments could damage the phone and may violate regulations governing radio devices.

All of the above suggestions apply equally to the product, battery, charger or any accessory.

ESD Protection

Nokia requires that service points have sufficient ESD protection (against static electricity) when servicing the phone.

Any product of which the covers are removed must be handled with ESD protection. The SIM card can be replaced without ESD protection if the product is otherwise ready for use.

To replace the covers ESD protection must be applied.

All electronic parts of the product are susceptible to ESD. Resistors, too, can be damaged by static electricity discharge.

All ESD sensitive parts must be packed in metallized protective bags during shipping and handling outside any ESD Protected Area (EPA).

Every repair action involving opening the product or handling the product components must be done under ESD protection.

ESD protected spare part packages MUST NOT be opened/closed out of an ESD Protected Area.

For more information and local requirements about ESD protection and ESD Protected Area, contact your local Nokia After Market Services representative.

Battery Information

Note: A new battery's full performance is achieved only after two or three complete charge and discharge cycles!

The battery can be charged and discharged hundreds of times but it will eventually wear out. When the operating time (talk-time and standby time) is noticeably shorter than normal, it is time to buy a new battery.

Use only batteries approved by the phone manufacturer and recharge the battery only with the chargers approved by the manufacturer. Unplug the charger when not in use. Do not leave the battery connected to a charger for longer than a week, since overcharging may shorten its lifetime. If left unused a fully charged battery will discharge itself over time.

Temperature extremes can affect the ability of your battery to charge.

For good operation times with Li-Ion batteries, discharge the battery from time to time by leaving the product switched on until it turns itself off (or by using the battery discharge facility of any approved accessory available for the product). Do not attempt to discharge the battery by any other means.

Use the battery only for its intended purpose.

Never use any charger or battery which is damaged.

Do not short-circuit the battery. Accidental short-circuiting can occur when a metallic object (coin, clip or pen) causes direct connection of the + and - terminals of the battery (metal strips on the battery) for example when you carry a spare battery in your pocket or purse. Short-circuiting the terminals may damage the battery or the connecting object.

Leaving the battery in hot or cold places, such as in a closed car in summer or winter conditions, will reduce the capacity and lifetime of the battery. Always try to keep the battery between 15°C and 25°C (59°F and 77°F). A phone with a hot or cold battery may temporarily not work, even when the battery is fully charged.

Batteries' performance is particularly limited in temperatures well below freezing.

Do not dispose of batteries in a fire!

Dispose of batteries according to local regulations (e.g. recycling). Do not dispose as household waste.

Company Policy

Our policy is of continuous development; details of all technical modifications will be included with service bulletins.

While every endeavor has been made to ensure the accuracy of this document, some errors may exist. If any errors are found by the reader, NOKIA MOBILE PHONES Business Group should be notified in writing/e-mail.

Please state:

- Title of the Document + Issue Number/Date of publication
- Latest Amendment Number (if applicable)
- Page(S) and/or Figure(s) in error

Please send to:

NOKIA CORPORATION

Nokia Mobile Phones Business Group

Nokia Customer Care

PO Box 86

FIN-24101 SALO

Finland

E-mail: Service.Manuals@nokia.com

(This page left intentionally blank.)

RM-801; RM-819 (Nokia Lumia 800) L3 & L4 Service Manual Structure

1 - General Information

2 - Service Tools and Service Concepts

3 - BB Troubleshooting and Manual Tuning Guide

4 - System Module

Glossary

Nokia Customer Care

1 - General Information

(This page left intentionally blank.)

Table of Contents

Product selection	1-5
Product features and sales package	1-6
Transceiver general specifications	1-9
RM-801 Main RF characteristics for GSM850/900/1800/1900, WCDMA VIII/II/I phones.....	1-9
QTR8200 System Module	1-9
RM-819 Main RF characteristics for GSM850/900/1800/1900, WCDMA V/II/I phones	1-9
QTR8200 System Module	1-9
Battery endurance.....	1-9
Environmental Condition	1-10

List of Figures

Figure 1 RM-801/RM-819 (Nokia Lumia 800) product picture.....	1-5
---	-----

(This page left intentionally blank.)

■ Product selection

RM-801 and RM-819 are GSM/WCDMA dual-mode hand portable monoblock multimedia computers with a capacitive touch UI, integrated GPS (A-GPS OMA SUPL) and WLAN. RM-801 supports GSM 850/900/1800/1900 and WCDMA I/II/VIII bands, GPRS/EGPRS and WCDMA/HSDPA/HSUPA data bearers. RM-819 supports GSM 850/900/1800/1900 and WCDMA I/II/IV/V bands, GPRS/EGPRS and WCDMA/HSDPA/HSUPA data bearers.

For WCDMA the maximum bit rate is up to 384kbit/s for downlink and 384 Kbit/s for uplink with simultaneous CS speech or CS video (max. 64kbit/s). The device supports HSDPA category 10 with downlink peak data rate up to 14.4 Mbit/s (in limited use cases), HSUPA belongs to category 6 with uplink peak data rate up to 5.76 Mbit/s (in limited use cases).

In PS/CS mode, the device supports DTM with multi slot class 11 (max. 4 RX + 3 TX, sum 5). With EGPRS this means maximum download speed of up to 236.8kbit/s simultaneously with speech. With GPRS this means maximum download speed of up to 80kbit/s simultaneously with speech.

In PS only mode, the device supports MSC 12, a maximum of 5 RX + 4 TX, sum 6 timeslots resulting in maximum download speed of up to 296 Kbit/s with EGPRS, and up to 100Kbit/s with GPRS.

The device has a large 3.7" OLED (864 x 480 pixels) ClearBlack WVGA touch display with 16 million colors and support for pinch zoom. It also has a 8 megapixel autofocus camera with Carl Zeiss optics and dual LED flash.

The MMS implementation follows the OMA MMS standard release 1.3. The browser is a highly advanced Internet browser also capable of viewing operator domain XHTML Mobile Profile (MP) content. The device also supports Bluetooth 2.1 + EDR standard with A2DP.

The device uses Windows Phone 7 operating system (release 7, Mango) and supports the full Web Browser for Internet Explorer 9 with desktop rendering which brings desktop-like Web browsing experience to mobile devices.



Figure 1 RM-801/RM-819 (Nokia Lumia 800) product picture

■ Product features and sales package

Imaging

Main camera:

- Sensor: 8 megapixel
- Carl Zeiss Optics: Tessar Lens
- F number/Aperture: F2.2
- Digital zoom: 4x
- Auto focus: Two-stage capture key
- Focal length: 28 mm (35 mm equivalent)
- Focus range: 10 cm ~ infinity
- Macro focus distance: 10~50cm

Video:

- Video resolution: 720p, 16:9, 1280 x 720, 30 fps
- Audio recording: AAC (AMR for MMS)
- Video stabilization
- Video clip length: Max. 90 min
- Video file format: .mp4 (default), .3gp (for MMS)
- White balance: automatic, daylight, cloudy, shade, incandescent, fluorescent
- Scene: auto, backlight, beach, candlelight, macro, landscape, night, portrait, snow, sports, sunset
- Colour tone: normal, sepia, B&W, solarize, negative
- Zoom (digital): 3x
- Continuous auto focus
- Touch focus
- Video recording indicator

Photo:

- Aspect ratio: 16:9 (7.1 Mpix), 4:3 (8 Mpix), 3:2 (7 Mpix)
- Still image file format: JPEG/EXIF
- Still image resolutions: up to 8 megapixel: 3248 x 2448
- Continuous autofocus
- Touch focus
- View finder: Full screen view finder
- Auto exposure: center weighted AE
- Image orientation: automatic
- Automatic red eye removal
- Face tracking
- Exposure compensation: +2 ~ -2EV at 0.5 step
- White balance: automatic, daylight, cloudy, shade, incandescent, fluorescent
- Scene: auto, backlight, beach, candlelight, macro, landscape, night, portrait, snow, sports, sunset
- Colour tone: normal, sepia, B&W, solarize, negative
- Zoom (digital): 4x

Edit

On device Photo editor and Video editor (manual & automatic)

View

- 3.7" WVGA OLED ClearBlack (800 x 480 pixels) color display, up to 16M colors, 16:9 aspect ratio
- Dipro sensor - a combination of ALS and proximity. ALS to optimize display brightness and power consumption. Proximity for turning off the display when in a call for power consumption.
- Slideshow from Pictures

Share

- Share effortlessly from Pictures or after capture
- Video sharing support (WCDMA services)
- Online Album: Image/Video uploading from Pictures

Store

- 16 GB flash memory
- 512 MB SDRAM
- Easy to transfer and organize photos and video between your device and a compatible PC

Music

- Digital music player: supports MP3/ AAC/ eAAC/ eAAC+/ WMA/ AMR-NB/ WB-AMR with playlists, equalizer and album art
- Synchronize music with Zune PC application
- Stereo FM radio (87.5-108 MHz /76-90 MHz) with Visual Radio™ support
- Bluetooth speakers
- Integrated hands free speaker
- Nokia Stereo Headset (WH-902), inbox

Media

- Full-screen video playback to view downloaded, streamed or recorded video clips
- Supported video formats: MPEG-4 , H.264/AVC, H.263/3GPP, WMV, AVI, Mov

Productivity

Context management:

- Internet Explorer 9 with desktop rendering
- OMA DRM version 2.0
- OTA provisioning

Messaging:

- E-mail (SMTP, IMAP4, POP3), MMS, SMS, unified editor
- IM client
- Office applications:
- Viewing of email attachments – .doc, .xls, .ppt, .pdf, .zip
- Mail for Exchange

PIM:

- Contacts, calendar, calculator, clock

Synchronization:

- Local/Remote (using Zune PC SW)
- Data: Calendar, Contacts, E-mail
- PC Applications: Microsoft Outlook (98, 2000, 2002, 2003), Outlook Express

Call management:

- Call logs, speed dial, voice dialing (with SIND) and voice commands

Connectivity

- Integrated GPS (A-GPS OMA SUPL)
- WLAN - IEEE802.11 g/b/n with UPnP support
- Micro USB interface with USB 2.0 high speed
- Bluetooth wireless technology 2.1 + EDR
- Nokia 3.5 mm AHJ connector

Add-on software framework

- Windows Phone 7 OS
- C++ and Java SDKs
- Flash Lite 4.0

Additional technical specifications

- Vibrating alert
- 3GPP Rel 8/6 compliant
- Speech codecs supported: AMR, NB AMR, FR, EFR, HR, iLBC, G.711, G.729
- GPRS/EGPRS Class B, multi slot class 12
- Dual Transfer Mode (DTM) class A, multi slot class 11
- WCDMA DL 384 kbit/s, UL 384 kbit/s
- HSDPA up to 14.4 Mbps, HSUPA 5.76 Mbps

Sales package

- Transceiver RM-801 or RM-819
- Nokia high efficiency charger (AC-16)
- Connectivity cable (CA-185CD) Wired Stereo Headset (WH-902)
- Fold-out user guide , Extended product information booklet

■ Transceiver general specifications

Unit	Dimension(mm)	Weight(g)	Volume(cc)
Transceiver with BV-5JW 1450mAh Li-Ion battery pack	116.5 x 61.2 x 12.1 mm	142	76

■ RM-801 Main RF characteristics for GSM850/900/1800/1900, WCDMA VIII/II/I phones

QTR8200 System Module

Parameter	Unit
Number of RF channels(GSM)	GSM850:124, GSM900:174, DCS1800:374, PCS:299
Channel Spacing	200kHz
Number of RF channels(WCDMA)	WCDMA2100:277, WCDMA1900:277, WCDMA900:152
Channel Spacing	200kHz

■ RM-819 Main RF characteristics for GSM850/900/1800/1900, WCDMA V/II/I phones

QTR8200 System Module

Parameter	Unit
Number of RF channels(GSM)	GSM850:124, GSM900:174, DCS1800:374, PCS:299
Channel Spacing	200kHz
Number of RF channels(WCDMA)	WCDMA2100:277, WCDMA1900:277, WCDMA850:124
Channel Spacing	200kHz

■ Battery endurance

Battery	Talk time	Standby time	Music Playback	Video Playback H.264 720p 30fps
BV-5JW 1450mAh Li-Ion battery	13h (GSM) 9.5h (WCDMA)	265h (GSM) 335h (WCDMA)	55h	7h

Note: Variation in operation times will occur depending on network parameters, phone setting and usage.

■ Environmental Condition

Environmental Condition	Ambient Temperature	Notes
Normal Operation	-15°C...+55°C	Specifications fulfilled
Reduced Performance	+55°C...+70°C	Operational only for short periods
Intermittent or No Operation	-40°C...-15°C and +70°C...+85°C	Operation not guaranteed but an attempt to operate will not damage the phone.
No Operation or Storage	<-40°C and >+85°C	No storage. An attempt to operate may cause permanent damage.
Charging Allowed	-15°C...+55°C	
Long Term Storage Conditions	0°C...+85°C	
Humidity and Water Resistance		Relative humidity range is 5 to 95%. Condensed or dripping water may cause intermittent malfunctions. Protection against dripping water has to be implemented (enclosure) mechanics. Continuous dampness will cause permanent damage to the module.

Nokia Customer Care

2 - Service Tools and Service Concepts

(This page left intentionally blank.)

Table of Contents

Service tools - Nokia	2-5
Product specific tools.....	2-5
SS-210.....	2-5
SS-282.....	2-5
General tools.....	2-5
CA-101	2-5
RJ-245	2-5
SRT-6.....	2-6
SS-93.....	2-6
SX-4T.....	2-6
Optional tools.....	2-6
XRS-6.....	2-6
MJ-305	2-7
SS-280.....	2-7
PCS-1	2-8
Service concepts (Nokia)	2-10
POS (Point of Sale) flash concept.....	2-10
Concept for flashing and product code change	2-11
Optional Module jig service concept 1 (Troubleshooting).....	2-12
Optional Module jig service concept 2 (Troubleshooting + RF Measurement)	2-13



List of Figures

Figure 2 POS flash concept	2-10
Figure 3 BE concept for flashing and product code change	2-11
Figure 4 BE Module jig service concept 1.....	2-12
Figure 5 BE Module jig service concept 2.....	2-13

(This page left intentionally blank.)



■ Service tools - Nokia


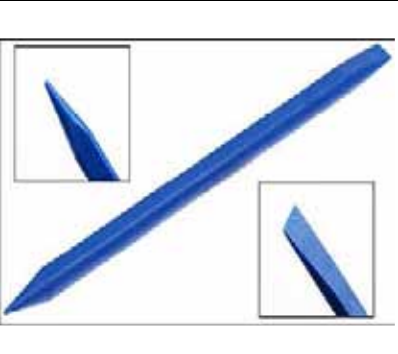

Product specific tools

	SS-210	Camera removal tool	0781189
	The camera removal tool SS-210 is used to remove/attach the camera module from/to the socket.		
	SS-282	Unibody Opening Tool	0781517
	The unibody opening tool is used to disassemble the device.		

General tools


The table below gives a short overview of service devices that can be used for testing, error analysis, and repair of product. For the correct use of the service devices, and the best effort of workbench setup, please refer to various concepts.




	CA-101	Micro USB cable	0730634
	The CA-101 is a USB-to-micro USB data cable that allows connections between the PC and the phone.		
	RJ-245	Soldering jig	0781484
	RJ-245 is a soldering jig used for soldering and as a rework jig for the engine module.		


	SRT-6	Opening tool	0770431
	SS-93	Opening tool	0780727
	SX-4T	Smart card	
	<p>SRT-6 is used to open phone covers. Note: The SRT-6 is included in the Nokia Standard Toolkit.</p> <p>SS-93 is used for opening JAE connectors. Note: The SS-93 is included in Nokia Standard Toolkit.</p> <p>SX-4T is a security device used to protect critical features.</p>		

■ Optional tools

The table below gives a short overview of service devices that can be used for testing, error analysis and repair of product. For the correct use of the service devices, and the best effort of workbench setup, please refer to various concepts.

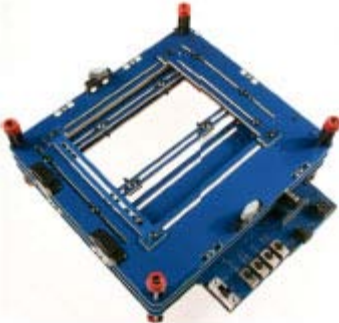	XRS-6	RF cable	0730231
	<p>The RF cable is used to connect, for example, a module repair jig to the RF measurement equipment.</p>		

	MJ-305	Module Jig	0781487
	<p>Module jig MJ-305 is designed for regional central services for engine testing; It can be used for flashing via USB and RF, battery and system testing.</p> <p>The main functions are:</p> <ul style="list-style-type: none"> ● Powering with external power ● CU-4 interface adapter to phone ● WLAN/BT/GPS RF-interface with probes ● GSM/WCDMA RF-interfaces with probes ● BSI mode selector(Tabby and Lynx interface, selected with battery cable) ● VBAT interface (Tabby and Lynx interface, selected with battery cable) ● SS-272 RF guide plate is required with this jig ● CA-158RS cable is used together with this jig for RF testing <p>VBAT functions can be performed in the CU-4. Calibration voltages and currents e.g. are protected and monitored by the CU-4 interface software (protection for over-current, overvoltage and reverse voltage).</p> <p>VBAT can be powered through MJ-305 with external power. MJ-305 provides the VBATT with SMPS regulation to 3.9V/2A and regulation bypass with overvoltage protection (trip point ~4.4VDC). The VBATT external supply is provided with overvoltage protection (trip point ~16.5VDC), polarity protection and over-current protection (fuse 2.5A slow).</p>		
	SS-280	RF guide plate	0781516
	<p>SS-280 is an RF guide plate used with MJ-305 module jig</p>		
		Spare Display Extend Flex	0781515
	<p>Display extend flex is a flex cable to assist with board level troubleshooting, connecting the Display Assembly with the PWB.</p>		

	PCS-1	Power cable	0730012
	<p>The PCS-1 power cable (DC) is used with a docking station, a module jig or a control unit to supply a controlled voltage</p>		

XRS-6 - common RF attenuation				
GSM Bands				
Band	default f/MHz RX	Attenuation RX	default f/MHz TX	Attenuation TX
GSM 850	881.6	0.27	836.6	0.27
GSM 900	942.4	0.29	897.4	0.27
GSM 1800	1842.8	0.47	1747.8	0.44
GSM 1900	1960.0	0.47	1880.0	0.46
WCDMA Bands				
Band	default f/MHz RX	Attenuation RX	default f/MHz TX	Attenuation TX
WCDMA I	2140.0	0.51	1950.0	0.47
WCDMA II	1960.0	0.47	1880.0	0.46
WCDMA III	1842.4	0.47	1747.4	0.44
WCDMA IV	2140.0	0.51	1740.0	0.44
WCDMA V	880.0	0.27	835.0	0.27
WCDMA VI	880.0	0.27	835.0	0.27
WCDMA VII	2655.0	0.51	2535.0	0.50
WCDMA VIII	942.6	0.29	897.6	0.27
WCDMA IX	1862.4	0.47	1767.4	0.44
WLAN Bands				
Band	default f/MHz RX	Attenuation RX	default f/MHz TX	Attenuation TX
WLAN/BT	2442.0	0.50	2442.0	0.50
WiMAX	2598.0	0.50	2598.0	0.50
FM				
Band	default f/MHz RX	Attenuation RX	default f/MHz TX	Attenuation TX
FM	103.0	0.10	103.0	0.10
GPS				
Band	default f/MHz RX	Attenuation RX	default f/MHz TX	Attenuation TX
GPS/RX	1575.5	0.40	n / a	n / a
Comment 1: The default frequency is center band for the Phoenix RF losses in MHz				
Comment 2: All Attenuations measured in dB				
Comment 3: All Attenuations accurate to +/- 0.1 dB				

■ Service concepts (Nokia)

POS (Point of Sale) flash concept

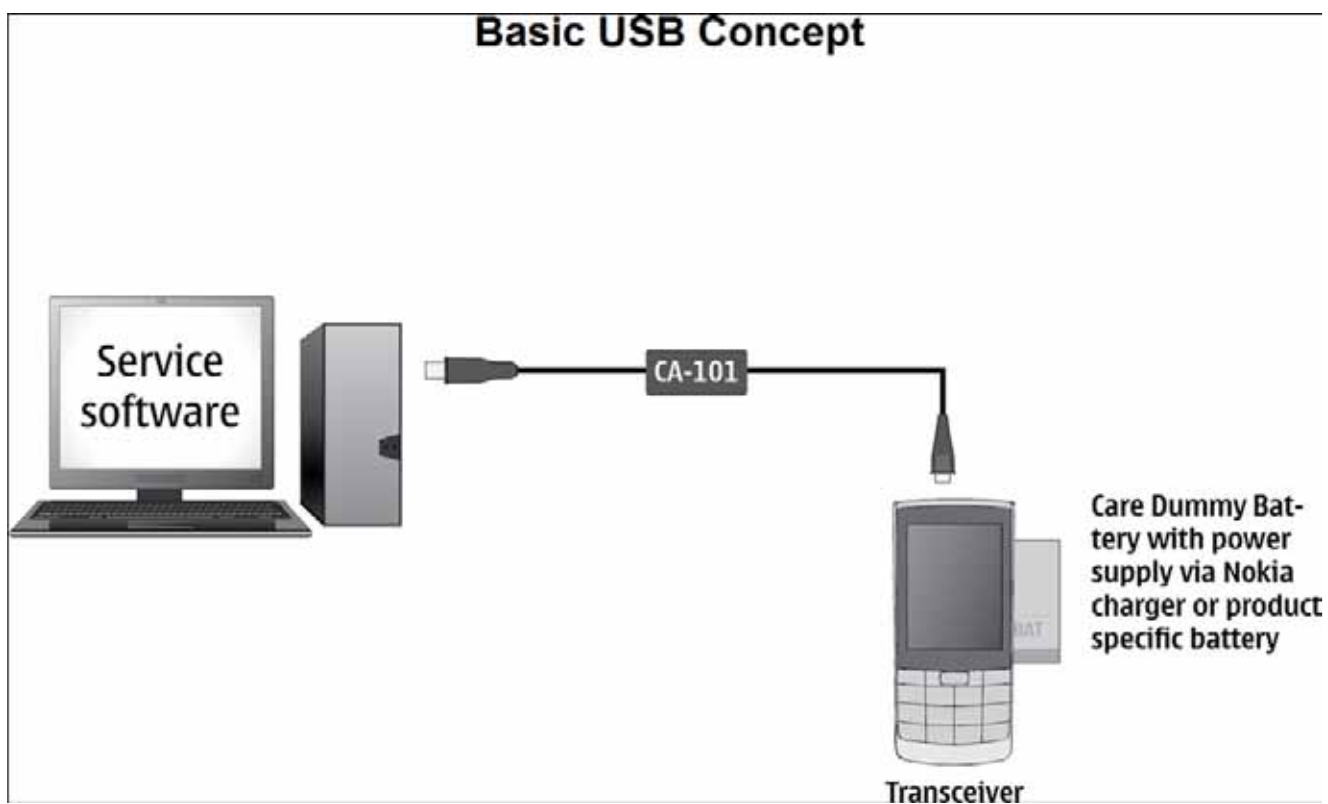


Figure 2 POS flash concept

Type	Description
Product Specific Devices	
BV-5JW	Battery
Cables	
CA-101	Micro USB cable

Concept for flashing and product code change

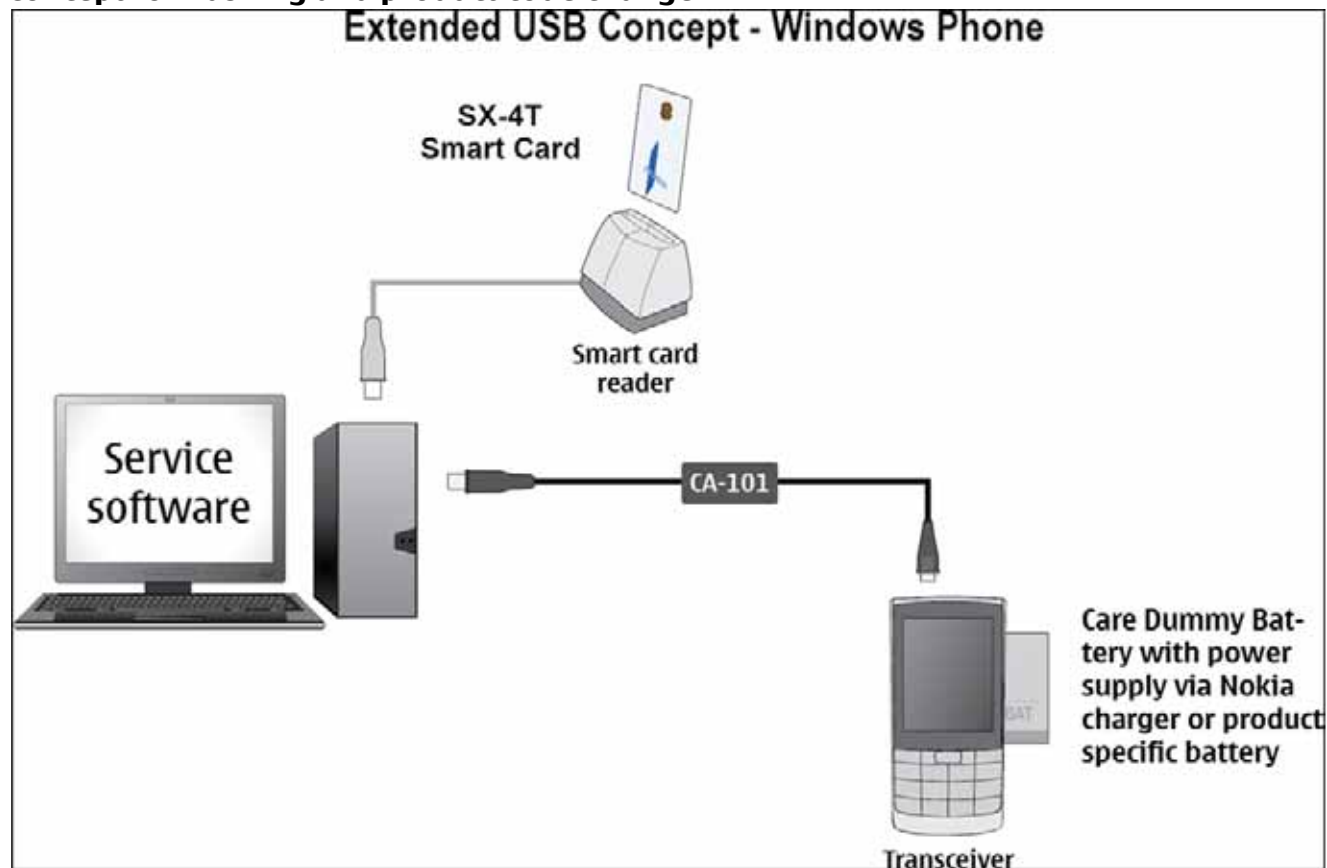


Figure 3 BE concept for flashing and product code change

Type	Description
Product Specific Devices	
BV-5JW	Battery
Other Devices	
SX-4T	Smart Card
Cables	
CA-101	Micro USB cable

Optional Module jig service concept 1 (Troubleshooting)

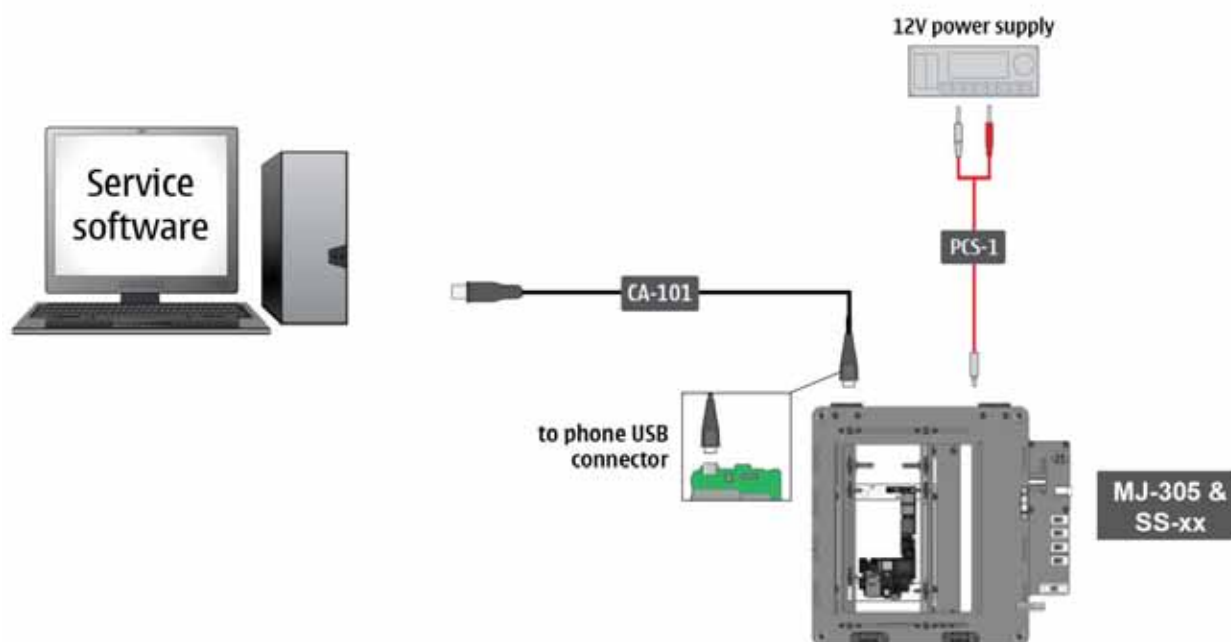


Figure 4 BE Module jig service concept 1

Type	Description
Product Specific Devices	
MJ-305	Module Jig
SS-280	RF guide plate
Cables	
CA-101	Micro USB cable
PCS-1	DC Power cable

Optional Module jig service concept 2 (Troubleshooting + RF Measurement)

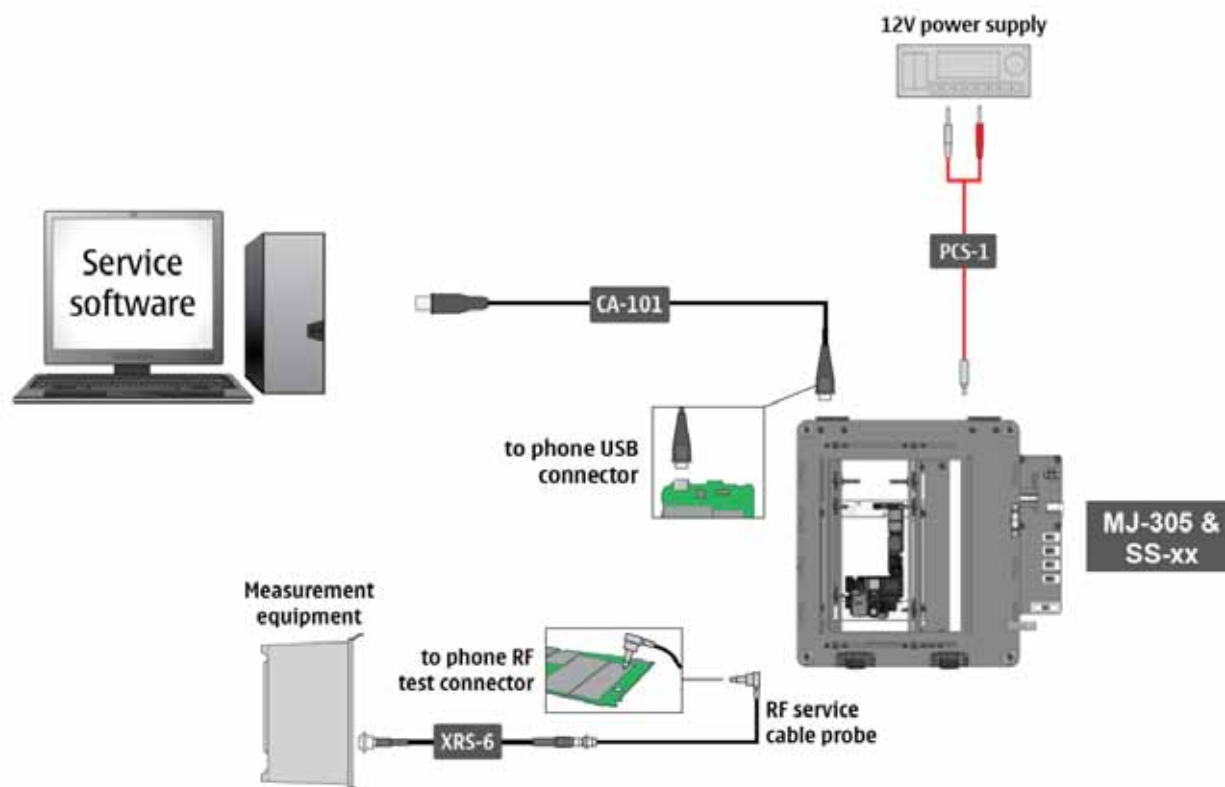


Figure 5 BE Module jig service concept 2

Type	Description
Product Specific Devices	
MJ-305	Module Jig
SS-280	RF guide plate
Cables	
CA-101	Micro USB cable
PCS-1	DC Power cable
XRS-6	RF cable

(This page left intentionally blank.)

Nokia Customer Care

3 - BB Troubleshooting and Manual Tuning Guide

(This page left intentionally blank.)


Table of Contents

Placement	3-5
Placement – Main Board (Top side)	3-5
Placement - Main Board (Bottom side)	3-6
Placement –Unibody	3-7
Placement –LCD Panel	3-8
How to power on Handset	3-9
On-Device Diagnostic Tool	3-10
Disclaimer screen	3-10
Run All Tests	3-11
Troubleshooting flow	3-12
General power checking troubleshooting	3-16
Dead or jammed device troubleshooting	3-17
USB troubleshooting	3-18
SIM Card troubleshooting	3-19
eMMC troubleshooting	3-20
Clocking troubleshooting	3-21
Application processor troubleshooting	3-22
DDR troubleshooting	3-23
Accelerometer test	3-24
Accelerometer troubleshooting	3-25
ALS Test	3-26
ALS troubleshooting	3-27
Audio Loopback test	3-28
Audio Loopback troubleshooting	3-29
Bluetooth troubleshooting	3-31
Camera test	3-32
Camera troubleshooting	3-33
Battery Status	3-34
Battery troubleshooting	3-35
DTMF test	3-36
DTMF troubleshooting	3-37
Headset detection test	3-38
Headset detection troubleshooting	3-39
LCD White	3-40
LCD troubleshooting	3-41


Lights test	3-42
Lights troubleshooting	3-43
Hardware buttons test.....	3-45
Hardware buttons troubleshooting	3-46
Magnetometer test	3-47
Magnetometer troubleshooting	3-48
Power source (Charging) test.....	3-49
Power source (Charging) troubleshooting	3-50
Proximity test	3-52
Proximity troubleshooting	3-53
Speaker test	3-54
Speaker troubleshooting.....	3-55
Touch test.....	3-56
Touch troubleshooting	3-57
Vibrator test.....	3-58
Vibrator Troubleshooting	3-59
Wireless LAN troubleshooting	3-60

■ Placement


Placement – Main Board (Top side)

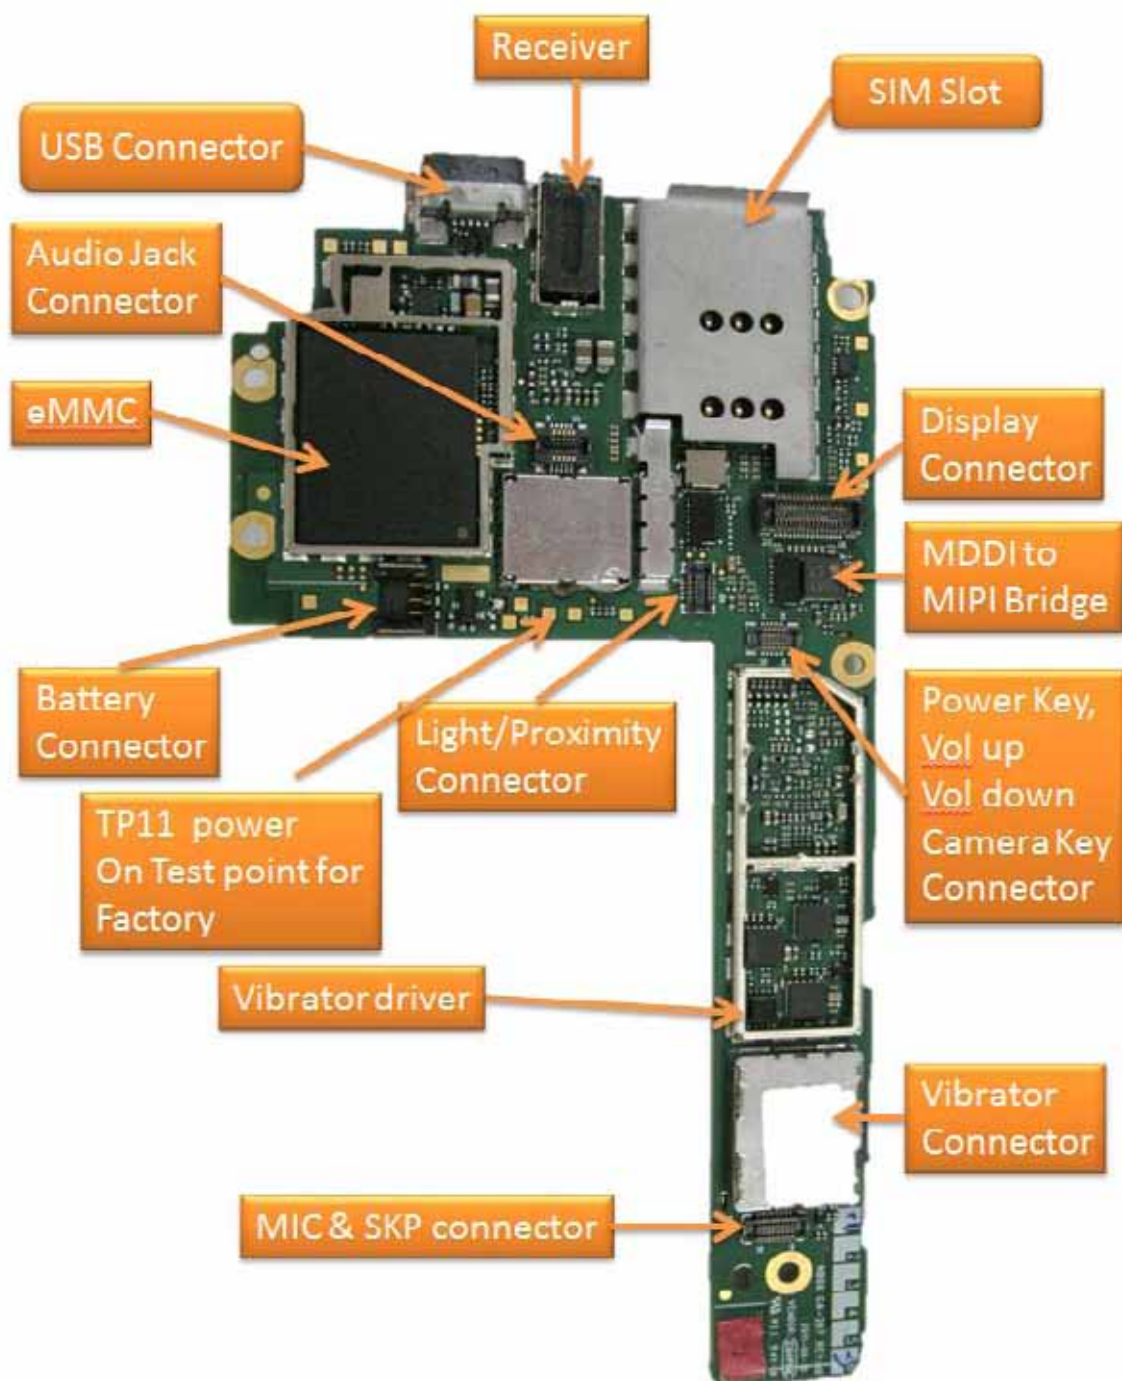


Placement - Main Board (Bottom side)

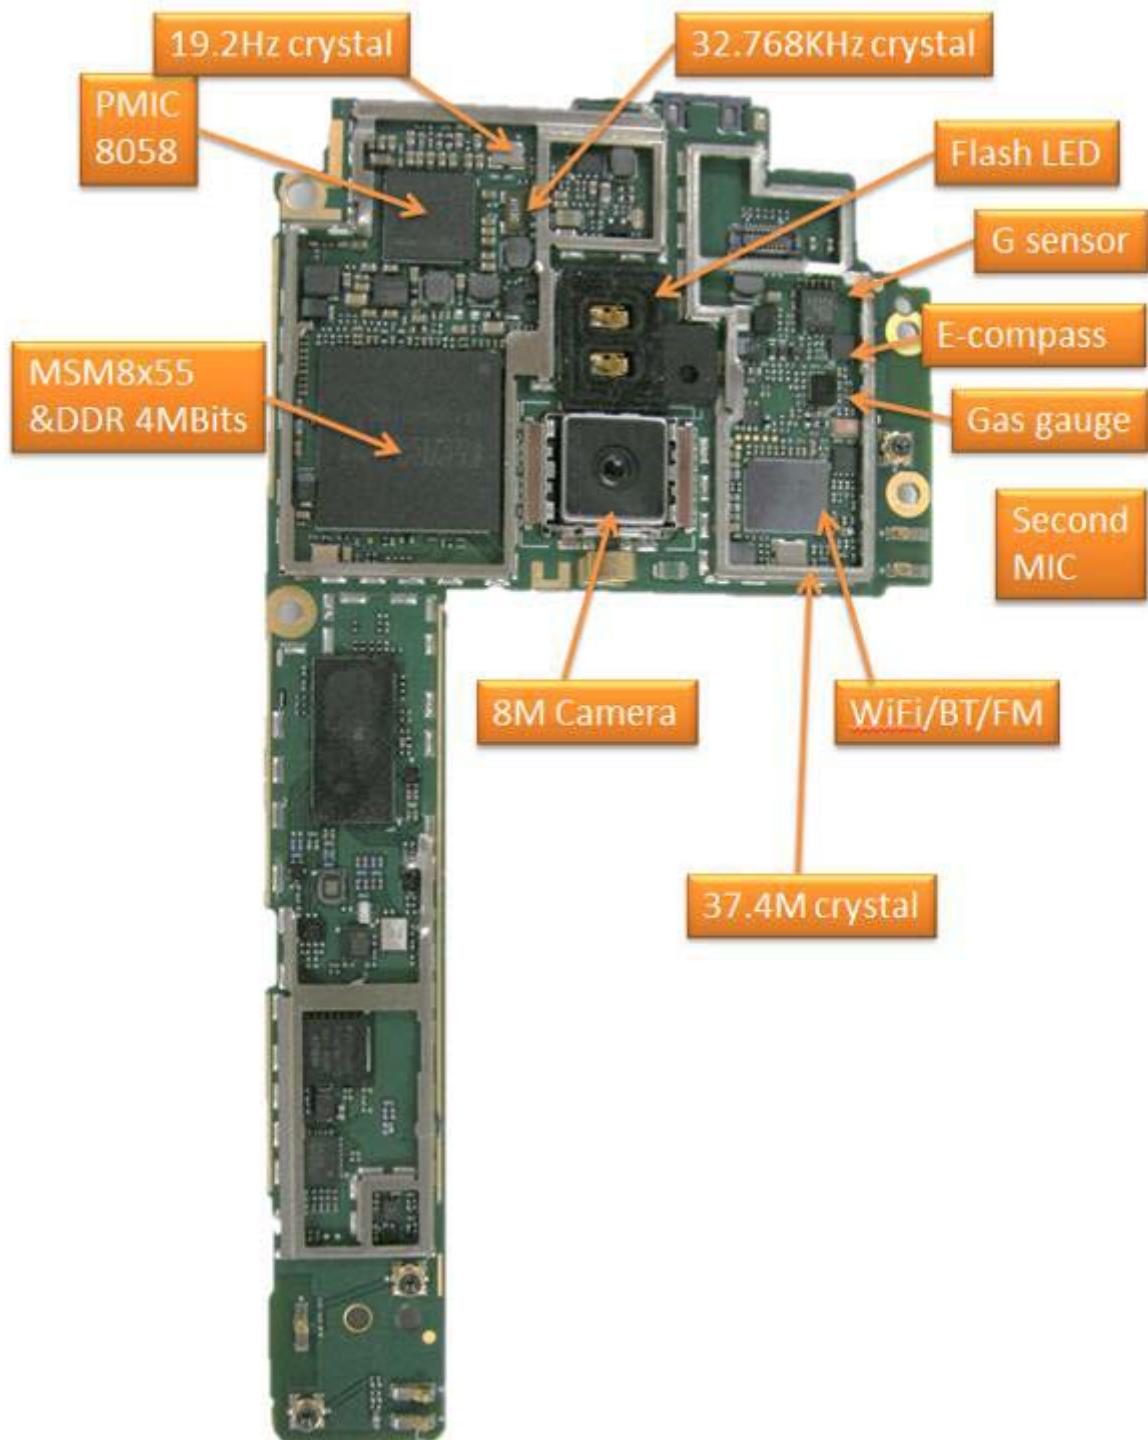

Placement –Unibody

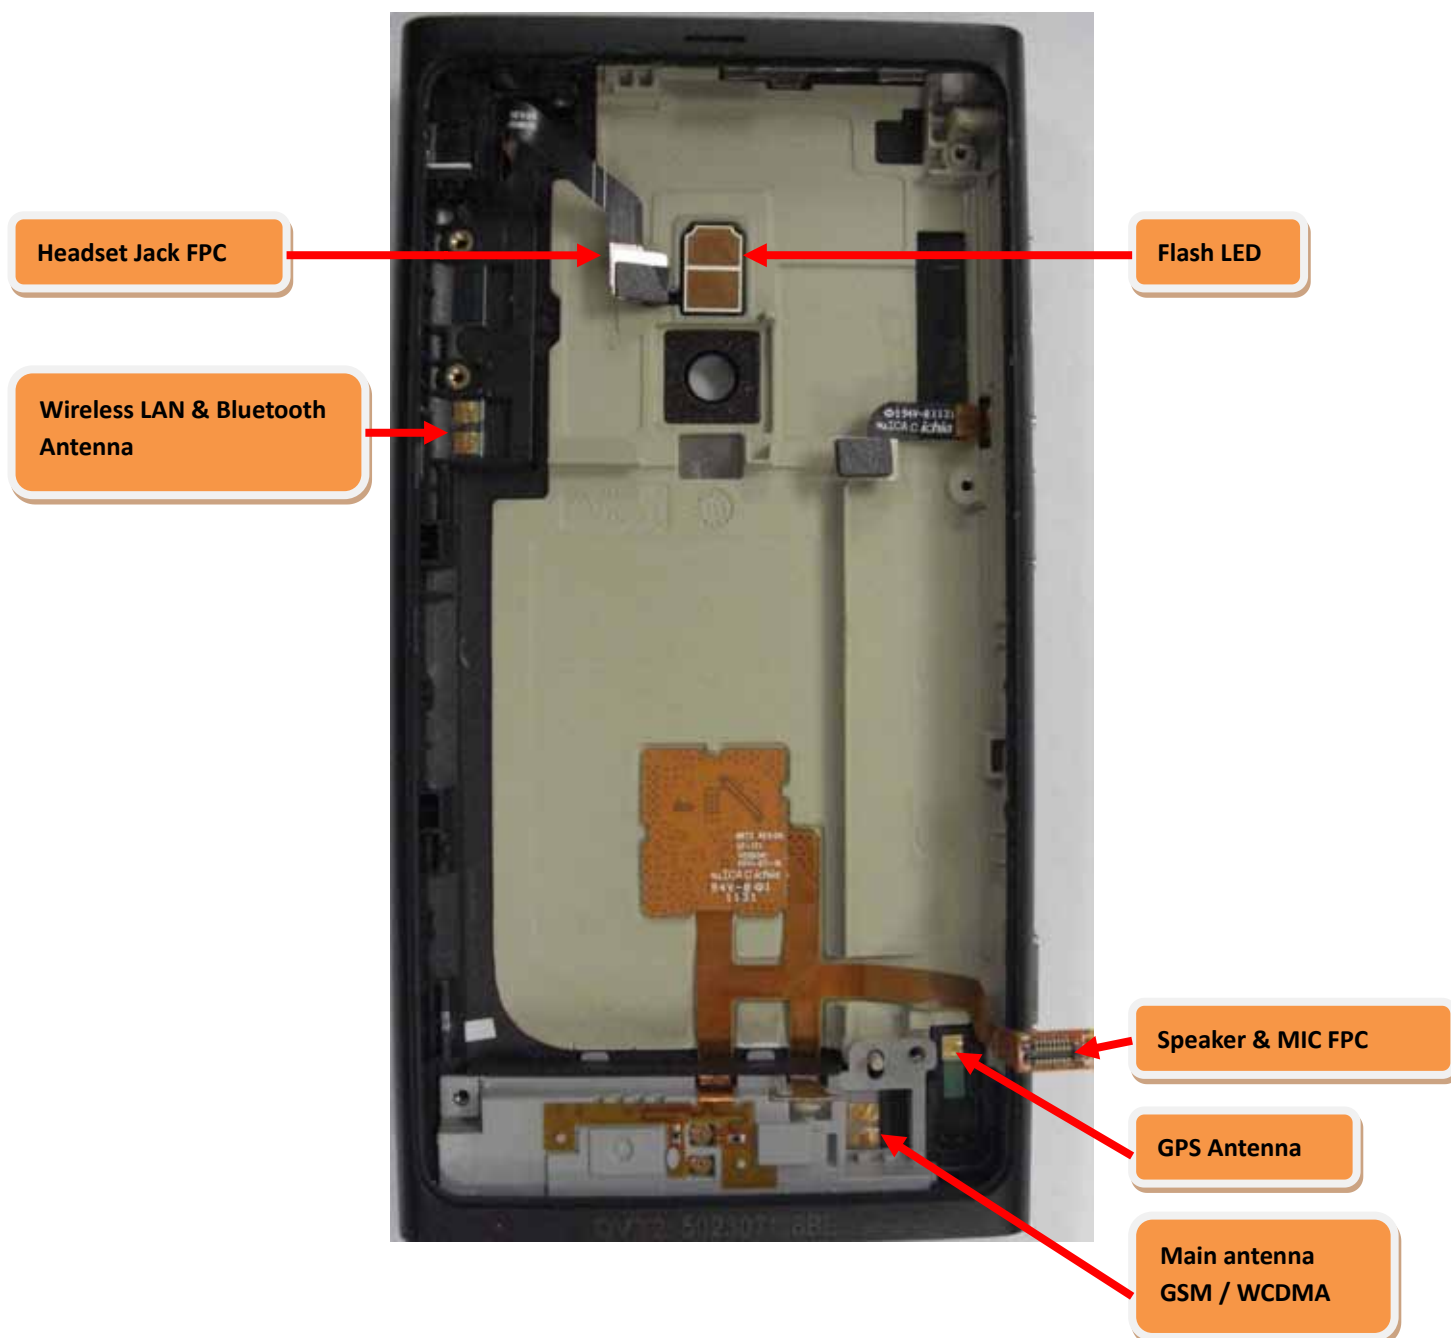


Placement -LCD Panel

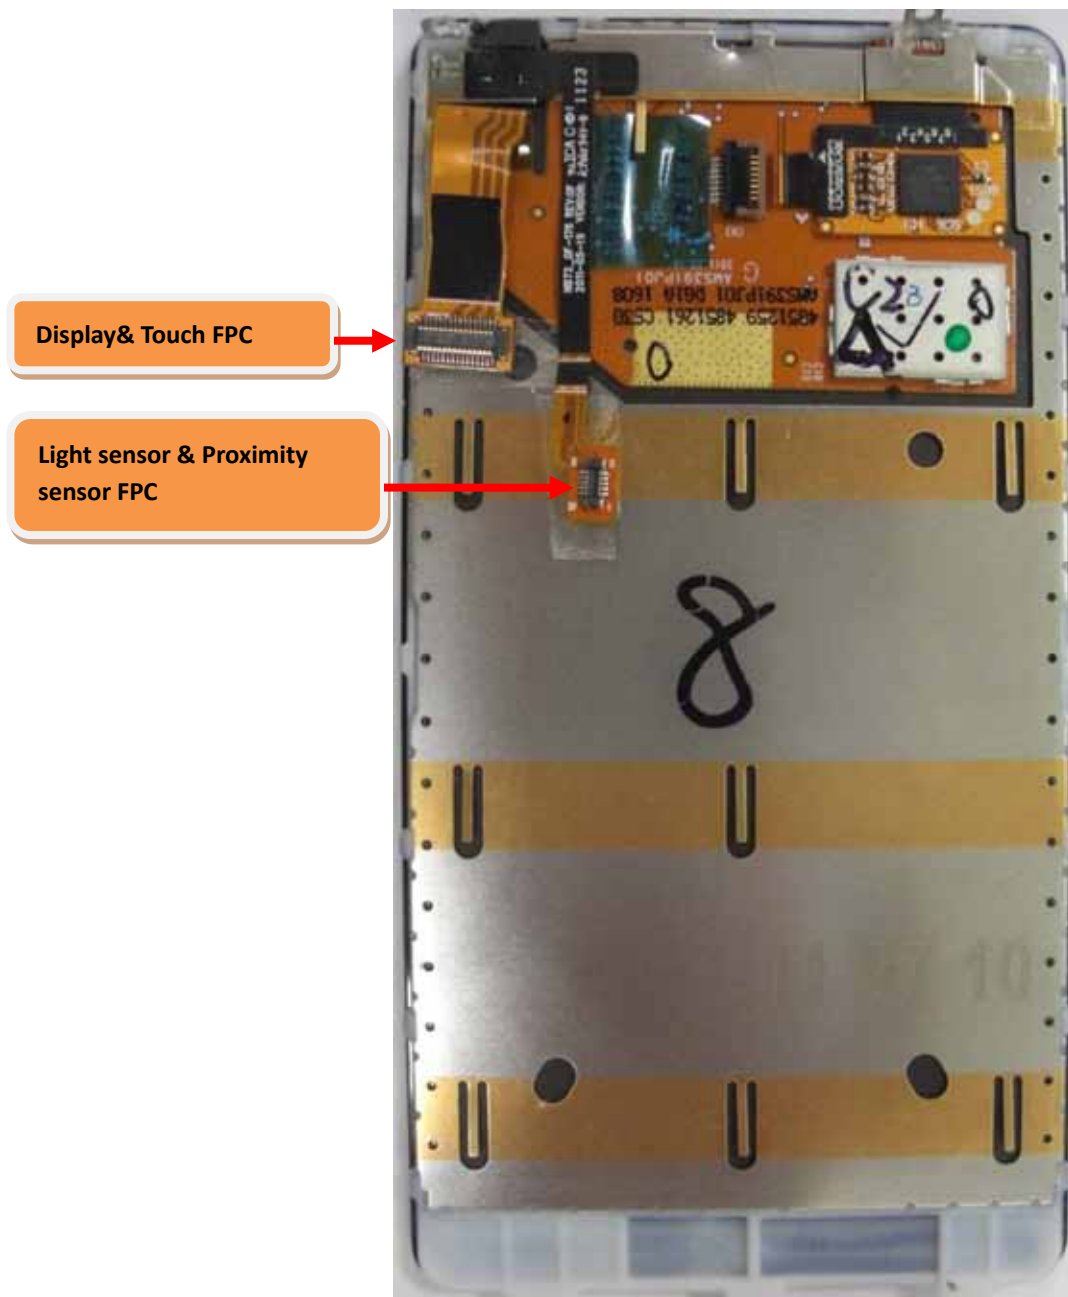


■ How to power on Handset

1. Push power key

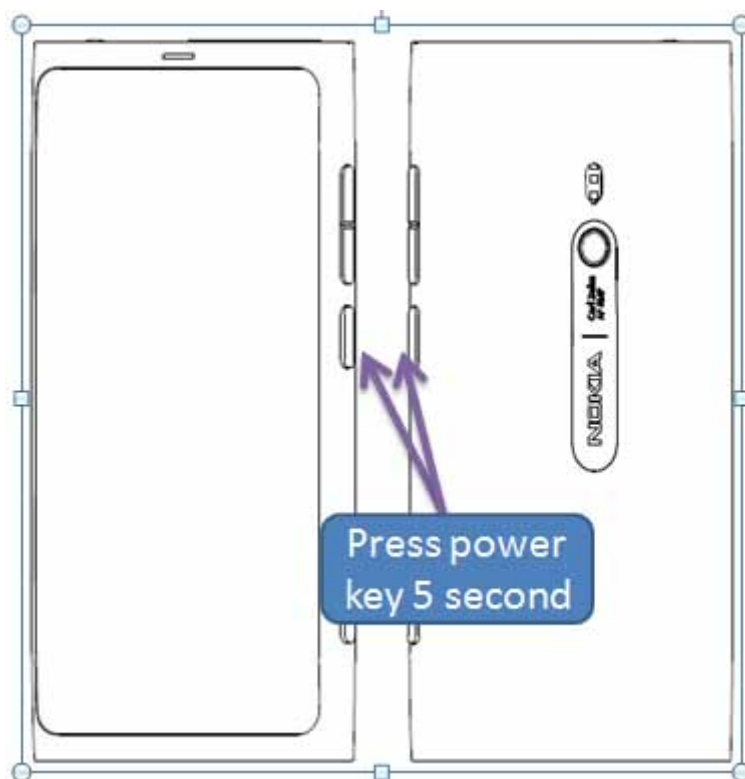

2. Short TP11 and GND.

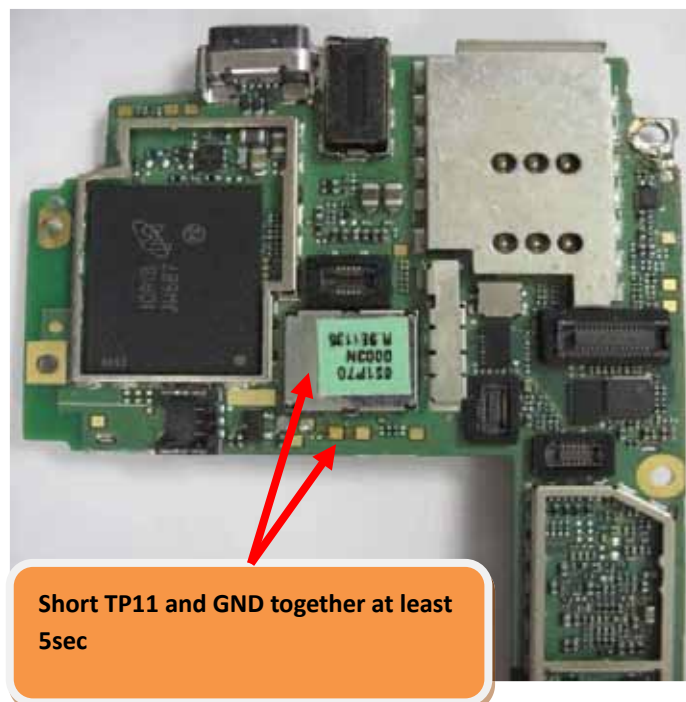

■ On-Device Diagnostic Tool

ODDT Installation

1. Enter ##634# on the on-screen keypad
2. Diagnostics app appears in Apps list


ODDT Removal

1. Tap and hold Diagnostics in the Apps list
2. Tap uninstall

Note: always remove the tool before returning the phone to the consumer

Disclaimer screen

Displayed when the user launches the ODDT application, The user must click on accept to proceed, Pressing the back '←' key will exit the application.

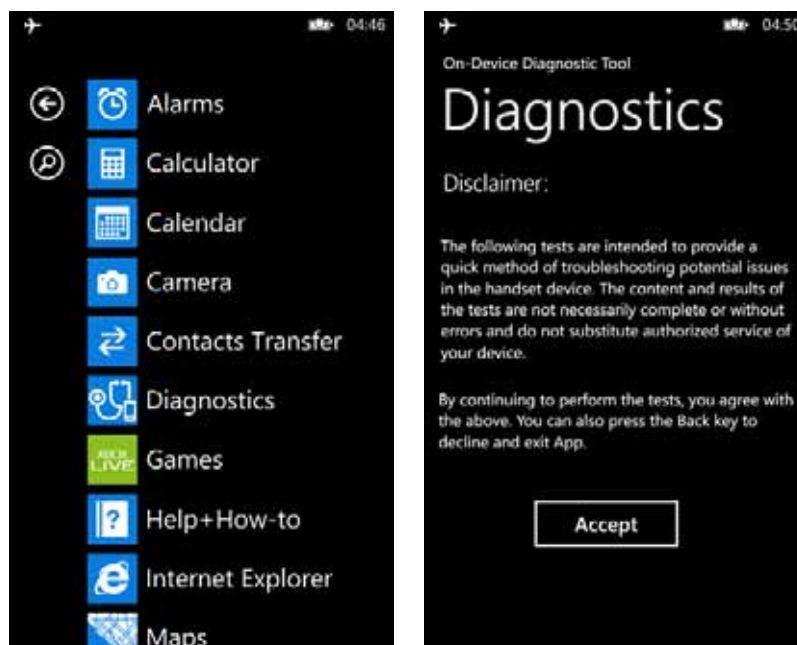


ODDT test item:


- Accelerometer – Shows accelerometer data, displays raw and filtered values of x, y, z
- ALS – Read current ALS value
- Audio loopback – Validates different audio output devices
- Camera – Verify image capture
- DTMF – Test DTMF tone generation.
- Hardware Buttons – Test hardware buttons.
- Headset detection – Validate headset connectivity
- Lights – Validates backlight functionality.
- Magnetometer – Reads current Magnetometer values.
- Power Source – Detects the active power source, either Battery or External
- Proximity – Shows the status of proximity sensor.
- Speaker – Validate basic integrity of speaker.
- Touch – Validate basic integrity of touch screen by allowing user to draw on screen.
- Vibrator – Validate basic integrity of vibrator


Run All Tests


When the user selects 'Run all tests', all the tests are executed sequentially, At the end of every test, the user is asked to input the result of the test (pass/fail) according to him/her, At the end of the sequence, the result is shown (as shown on the under, Pressing the back '←' key will take the user to the main test menu.

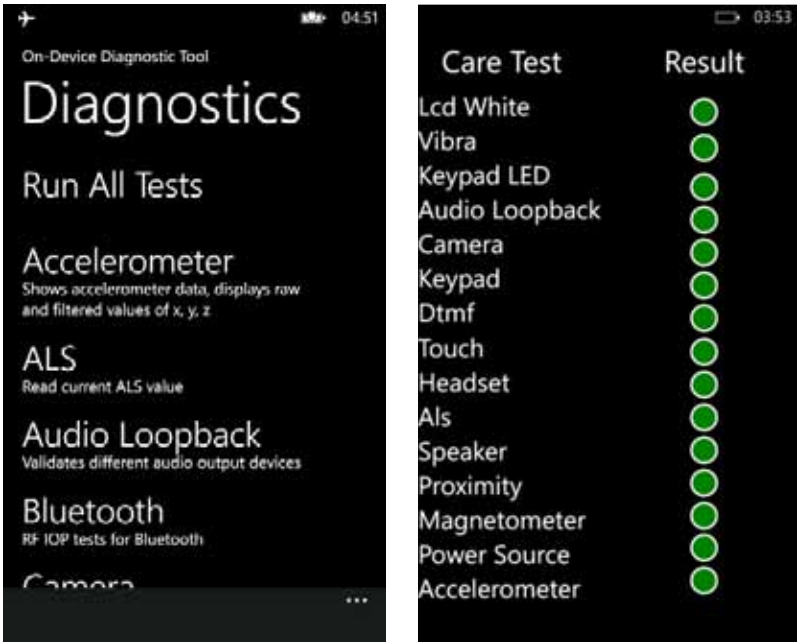


■ Troubleshooting flow

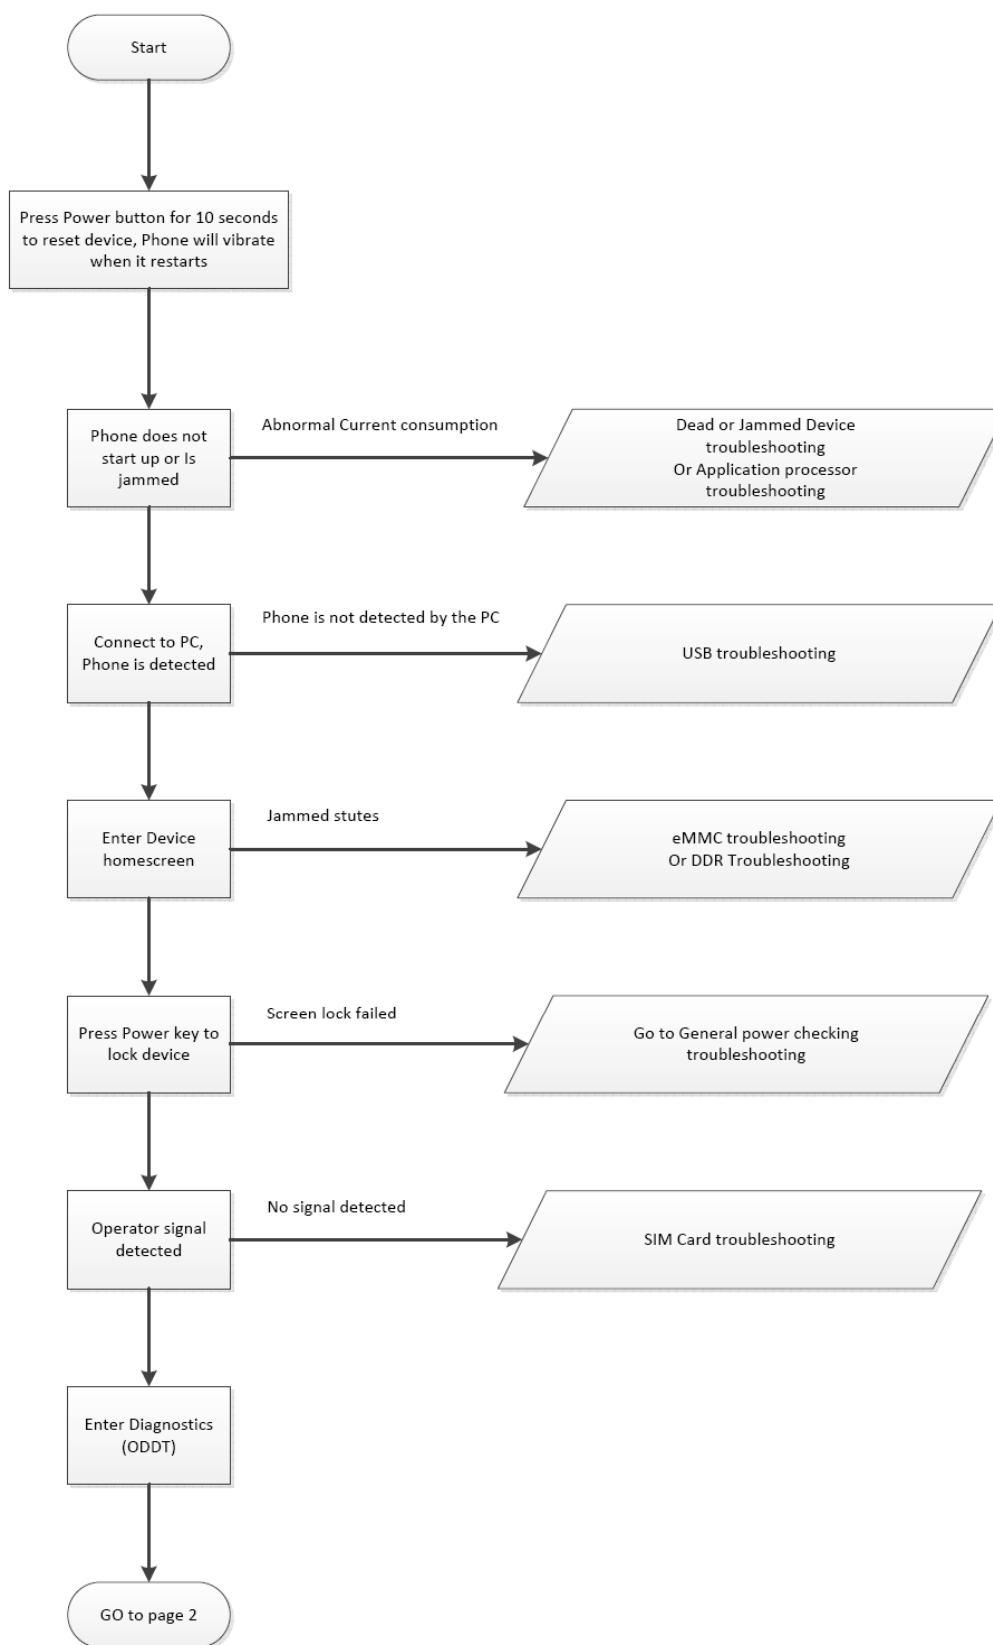


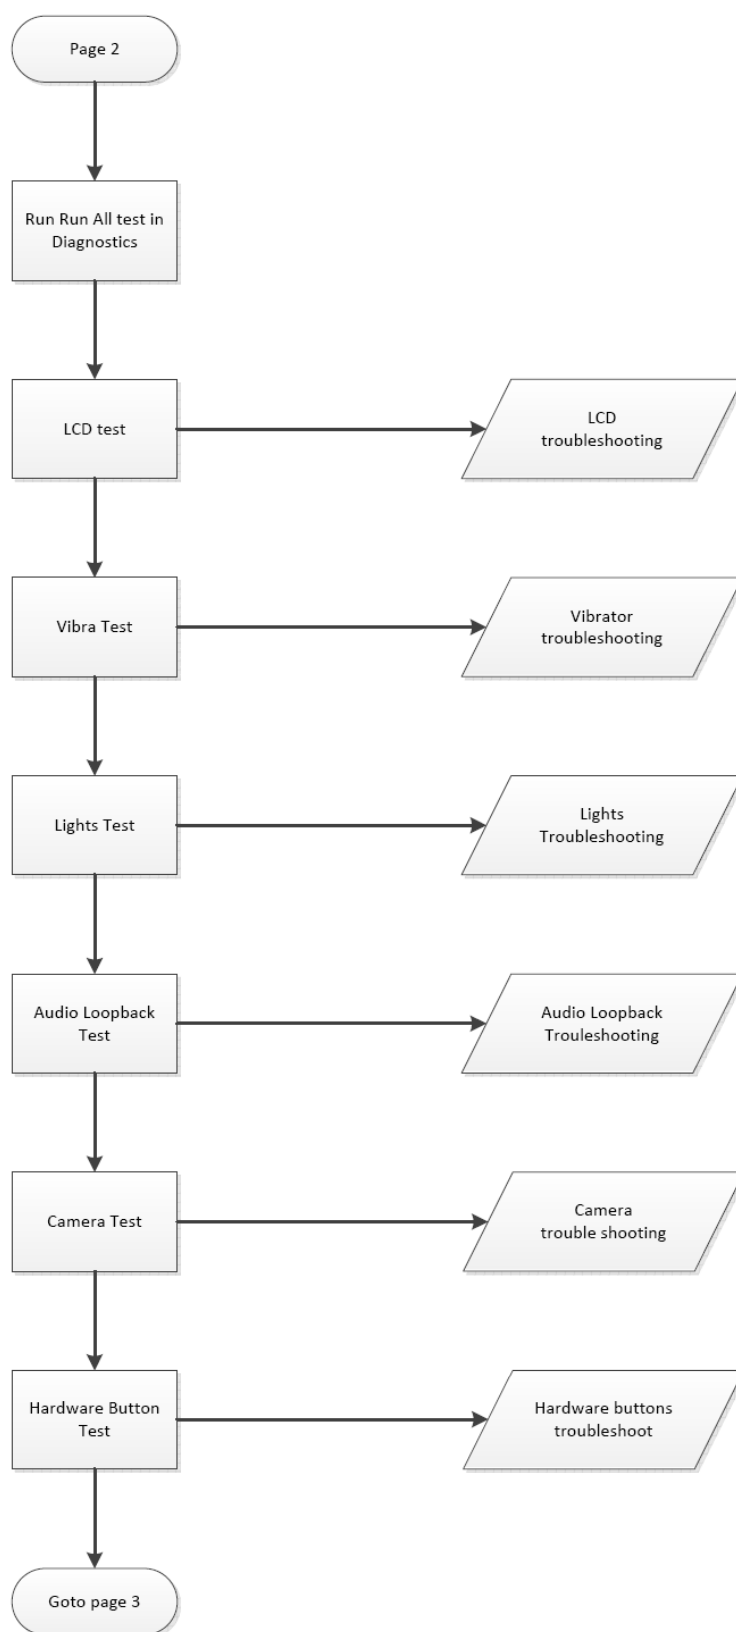

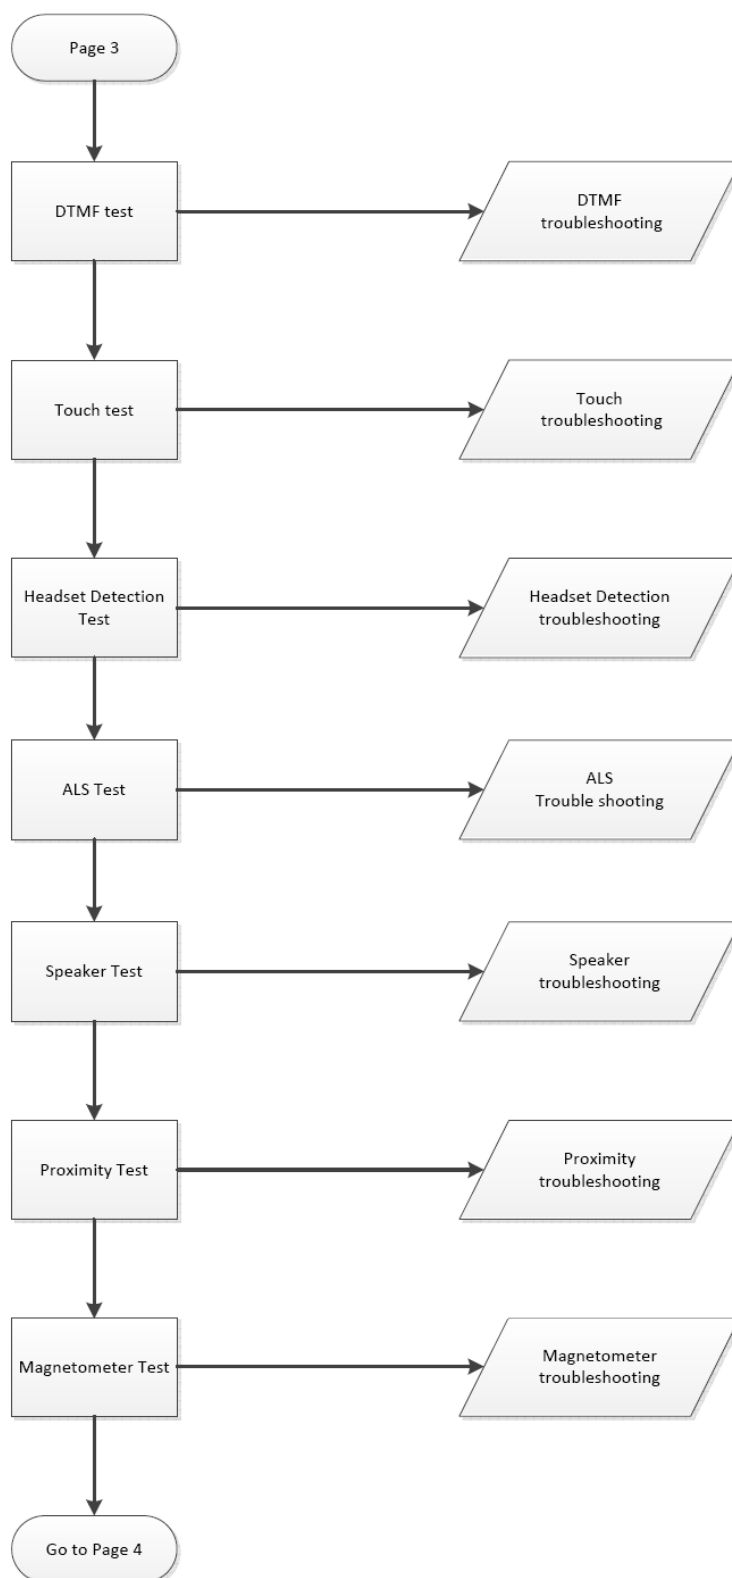

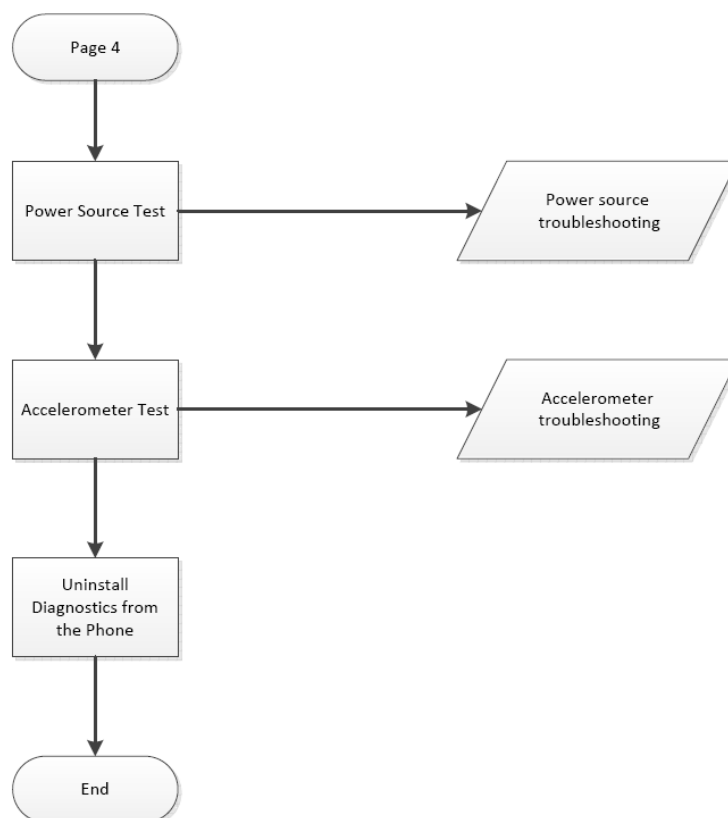


General power checking troubleshooting

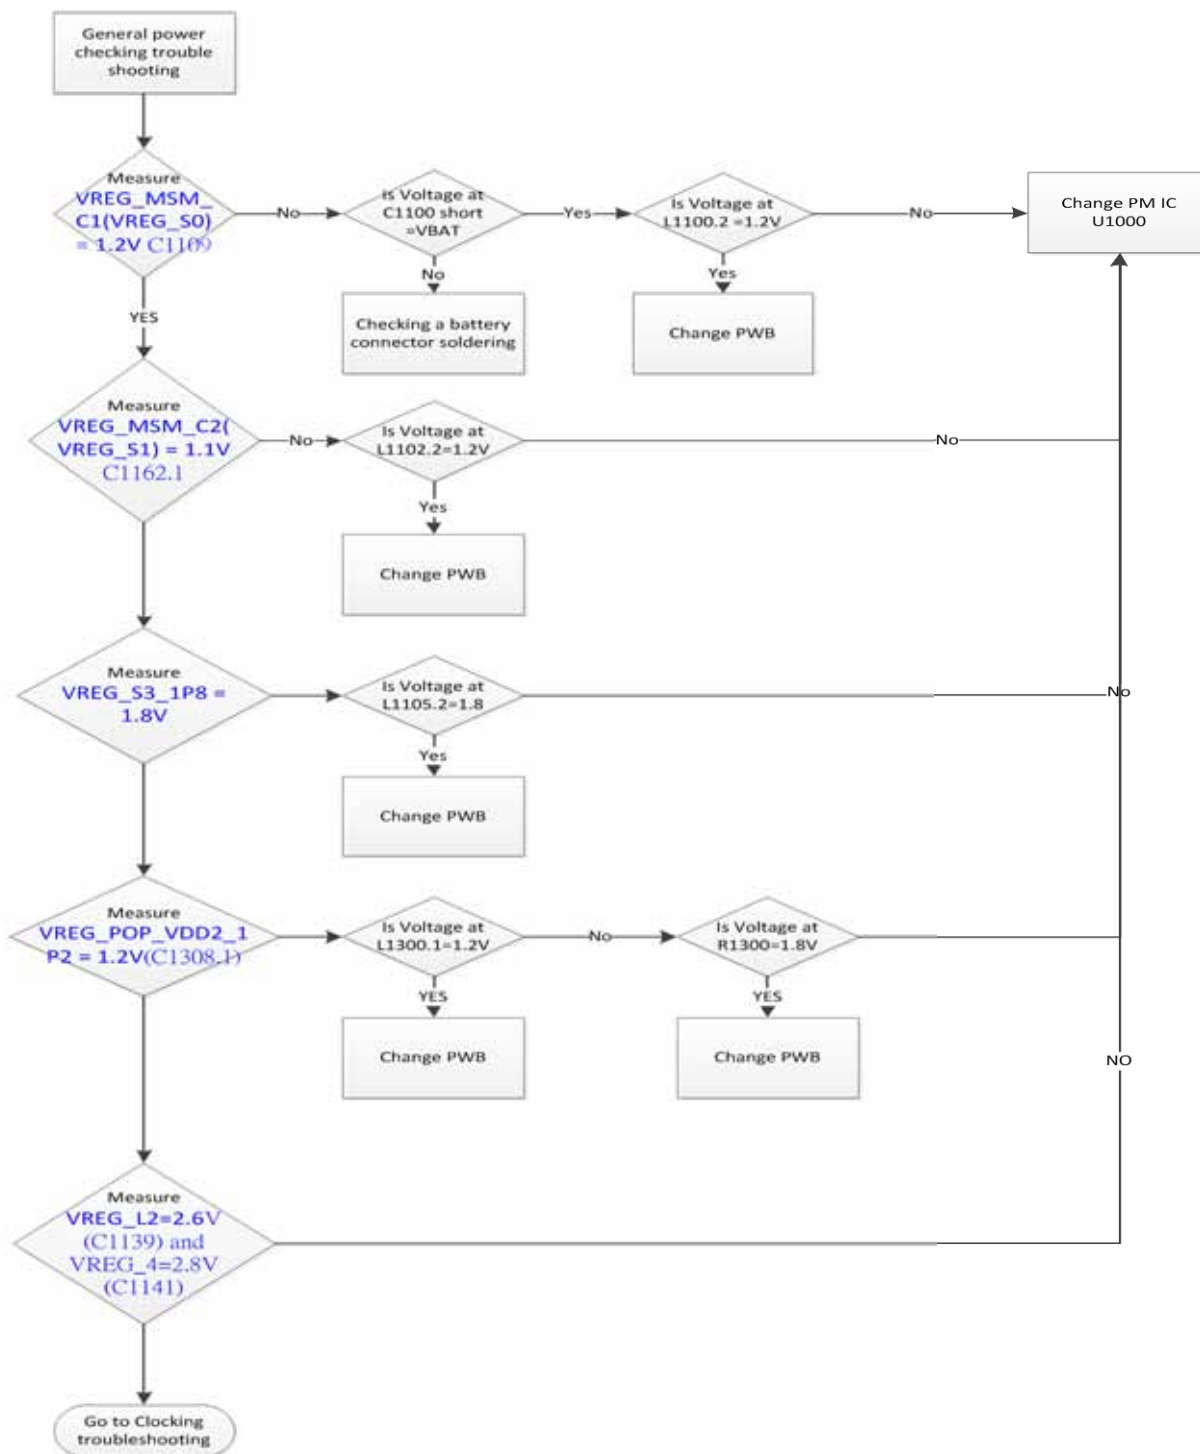


Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
8002352	0480805801C	IC PMU	POWER MANAGEMENT IC QUALCOMM



Dead or jammed device troubleshooting

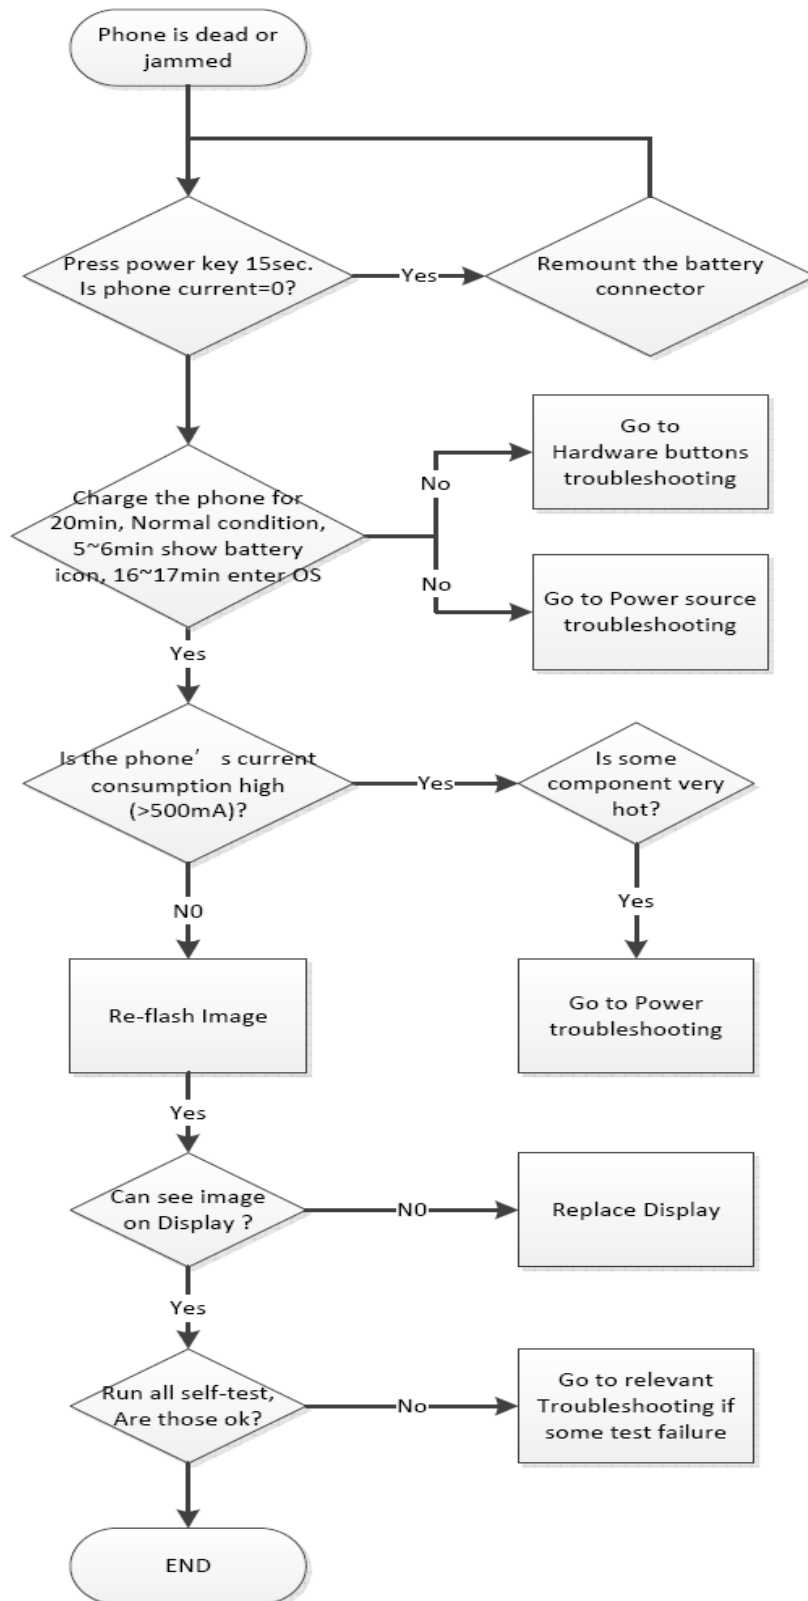

USB troubleshooting

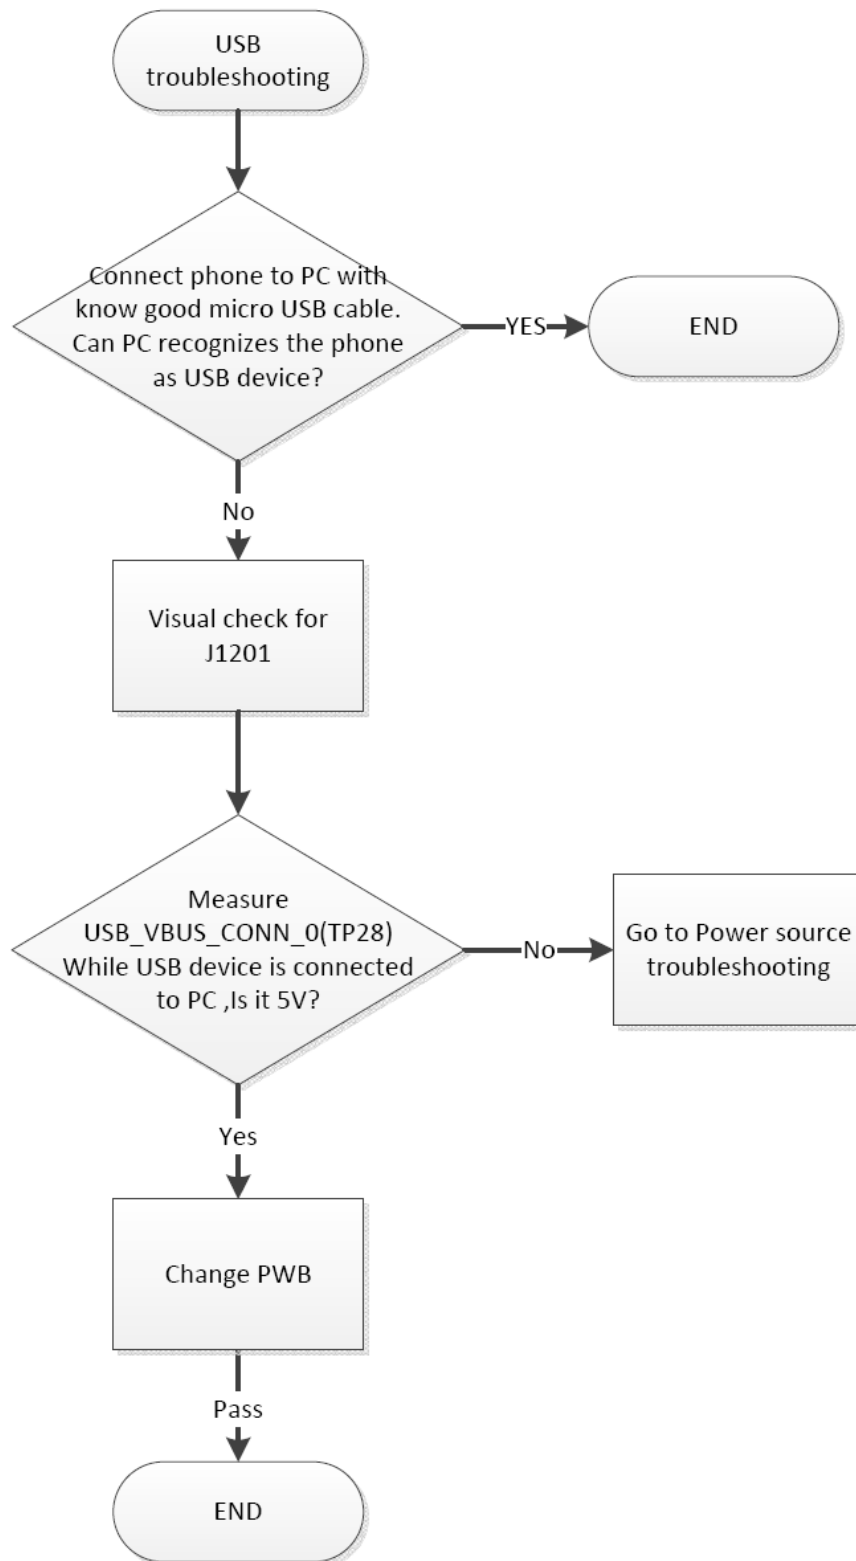

SIM Card troubleshooting

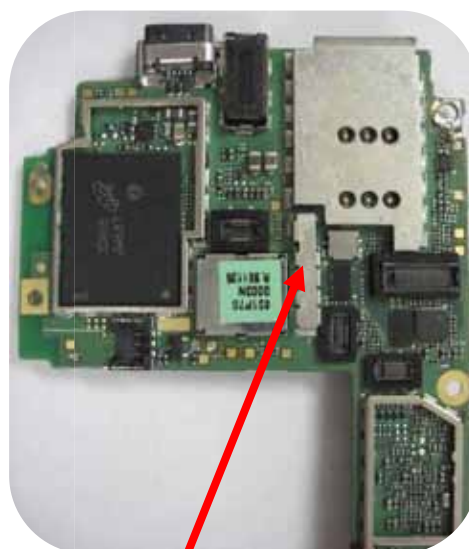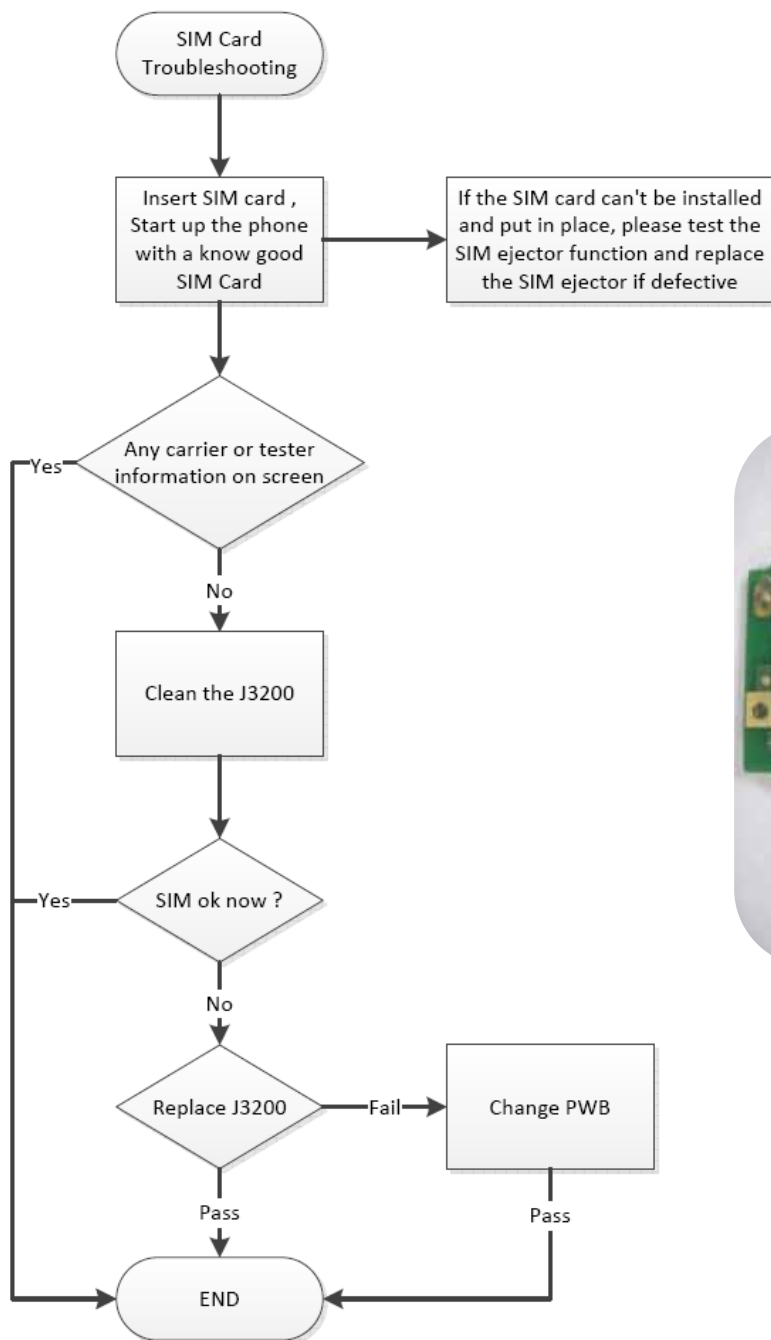


SIM ejector


Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
8002322	2304000008W	SIMSOCKET	SIM READER
8002335	3052NB7216W	SHIELD-C	SIM COVER
8002351	3052NB7219W	SHIELD	SIM EJECTOR


eMMC troubleshooting

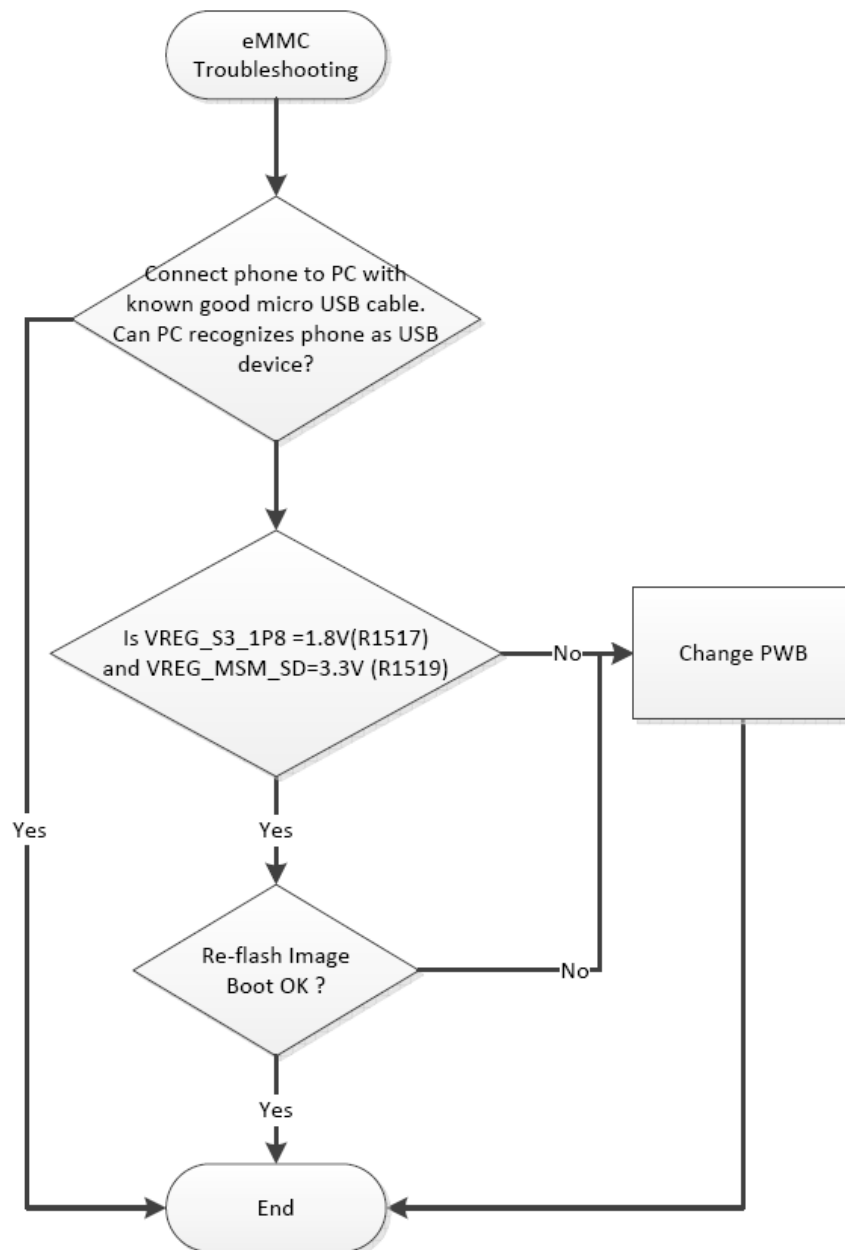


Clocking troubleshooting

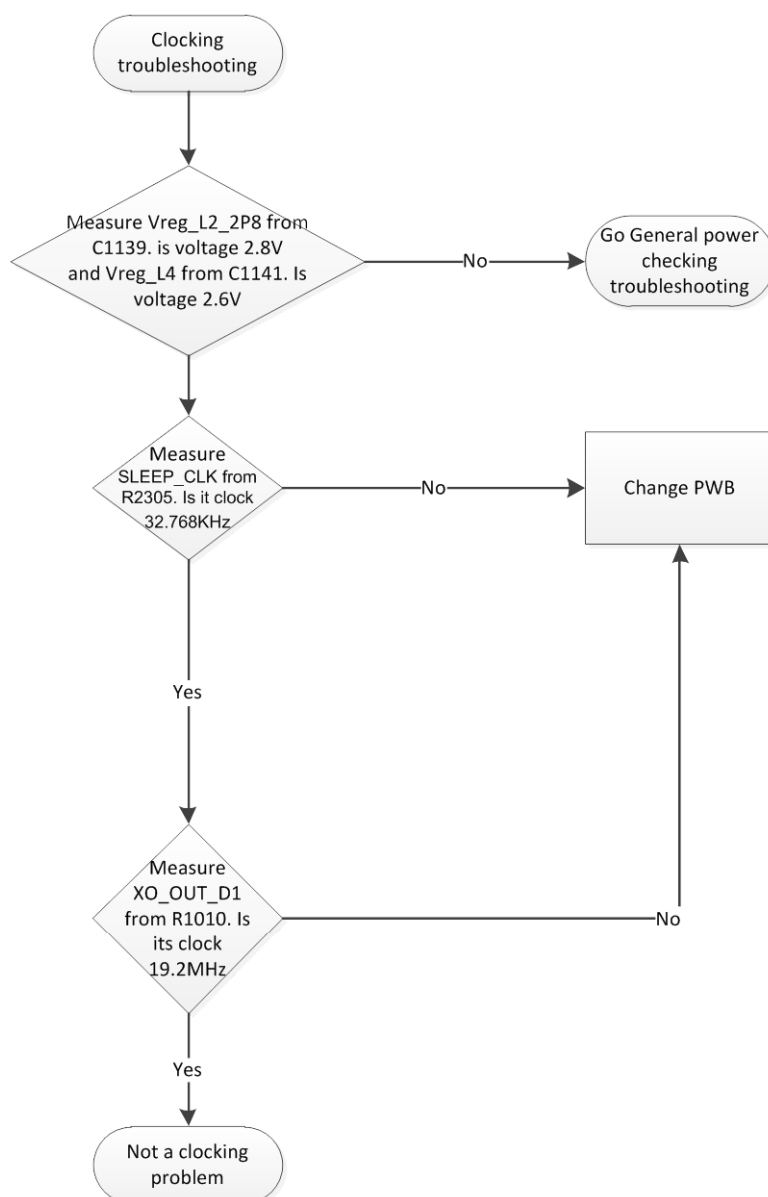

Application processor troubleshooting

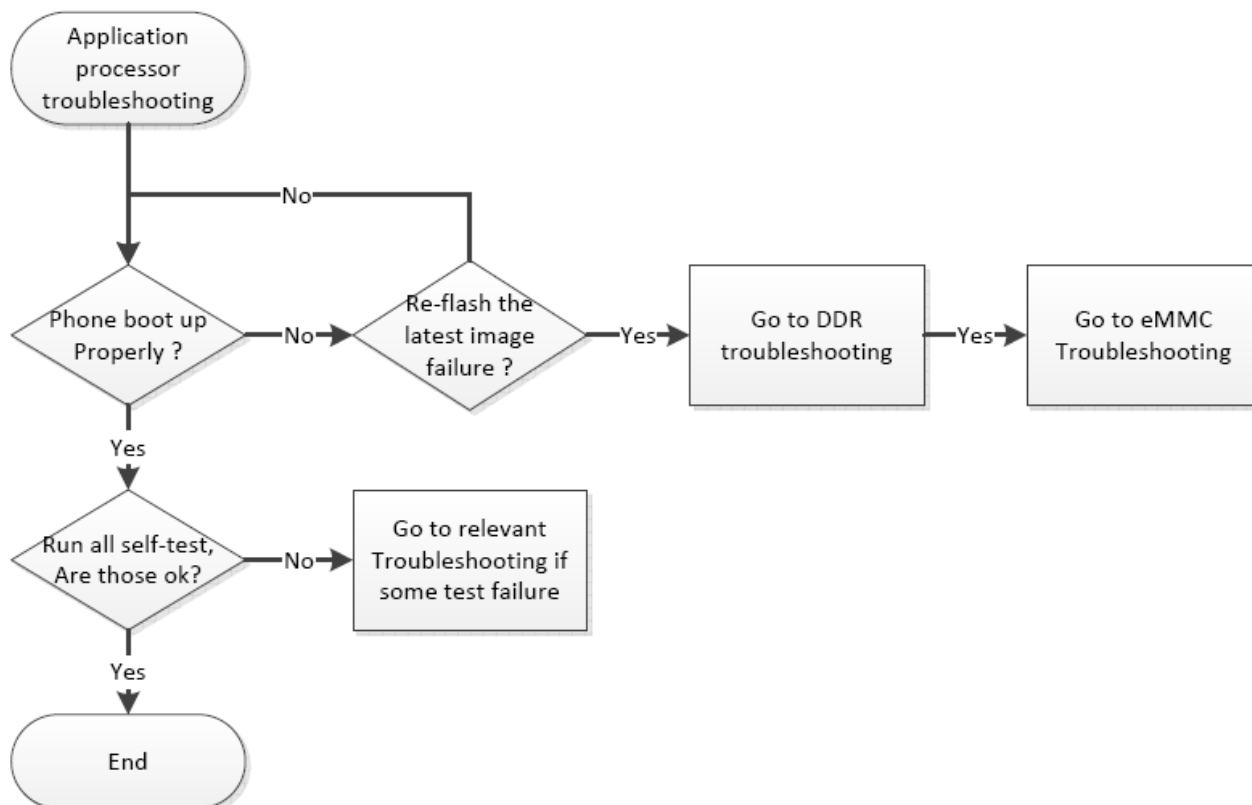

DDR troubleshooting

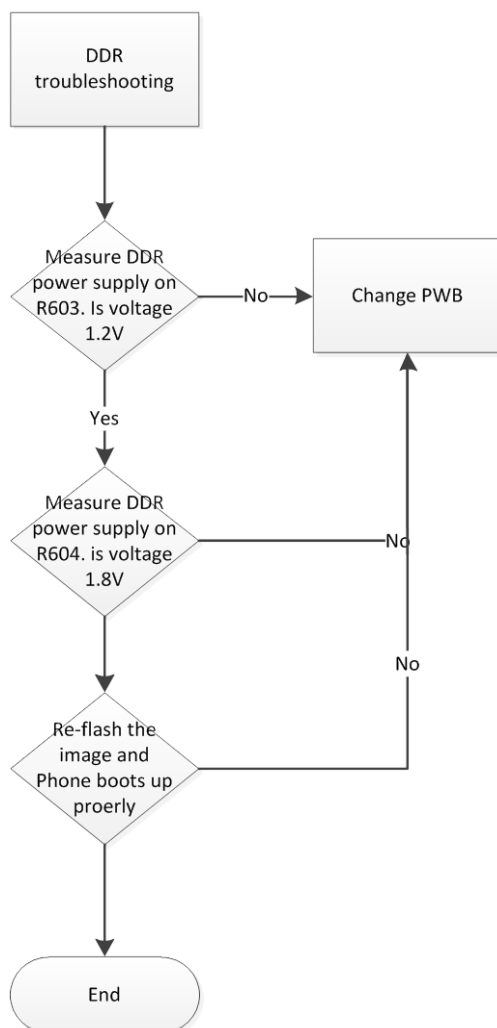

Accelerometer test

Displayed data:

- Numeric values for X, Y and Z direction movement
- Raw and filtered data (amplitude changes < 0.05 are ignored) will be displayed
- A moving ball


User can change settings for:

- none


User can test:

- Movements of the device will change displayed values
- A ball will move around on the screen to visualize the tilt of the device

Pressing the back '←' key will navigate back to the main menu

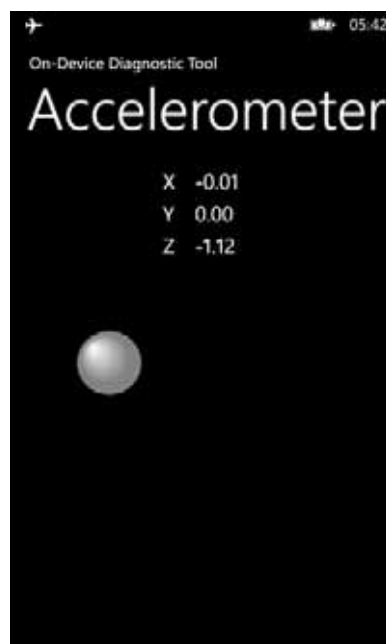

Accelerometer troubleshooting

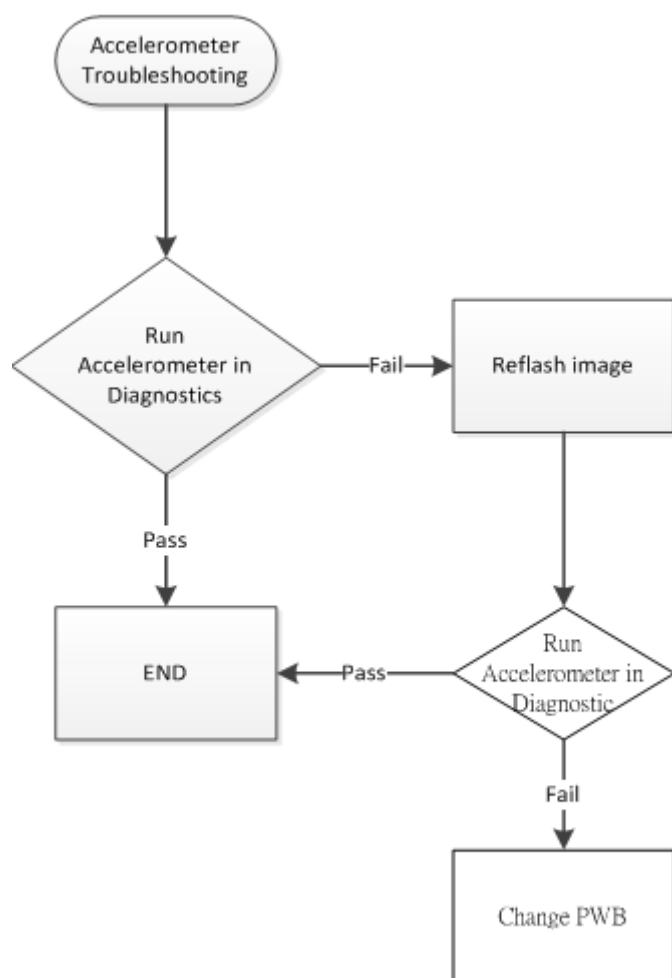

ALS Test

Displayed data:

- Light intensity in mLux
- A gray scale rectangle with varying intensity


User can change settings for:

- N/A


User can test:

- Cover the opening in the front of the phone over ALS component
- The value of the light intensity should change dynamically and displayed in the textbox
- The changing value can be visualized with changing brightness of the gray scale

Pressing the back '←' key will take the user back to the application menu

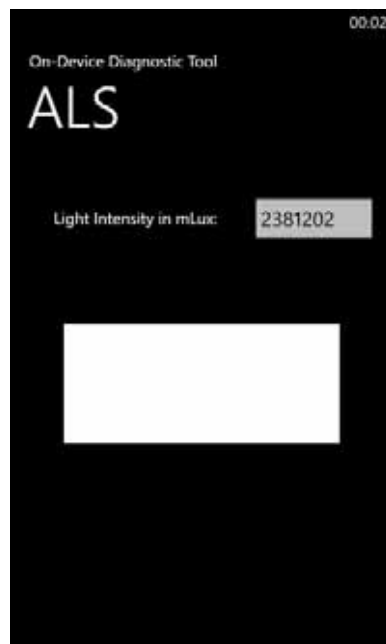

ALS troubleshooting

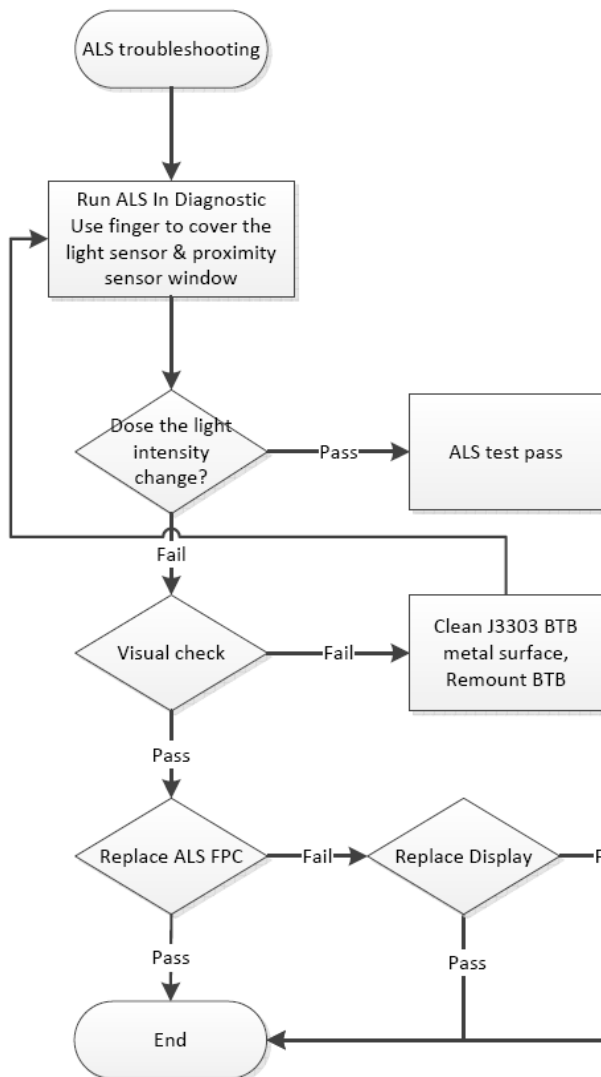

ALS J3303 BTB



ALS FPC

Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
8002364	78P3060001N	ALS/PROXIMITY FPC ASSY	ALS/PROXIMITY FPC + SPONGE
8002365	78P3050001N	DISPLAY ASSY	DISPLAY + LCD SPONGE

Audio Loopback test

Displayed data:

- none


User can change settings for:

- Audio routing output
 - Headset
 - Earpiece
 - Loud speaker
- Headset audio channel (left/right)



User can test:

- Pressing "Loopback On/Off" button starts/stops playback of audio received from the microphone with a slight delay
- The Audio routing will be transferred based upon the output location select
- When the output is set to headset, then user has an option to test headset channels (left/right) – a short clip will be played
- When user selects start loopback when output is set to headset, then the channel test is disabled

Pressing the back '←' key will navigate back to the main menu

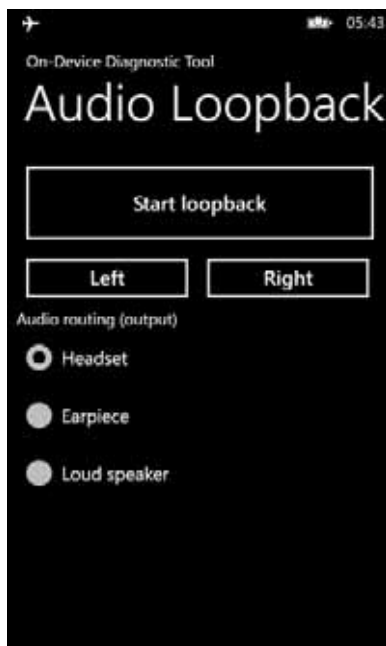

Audio Loopback troubleshooting

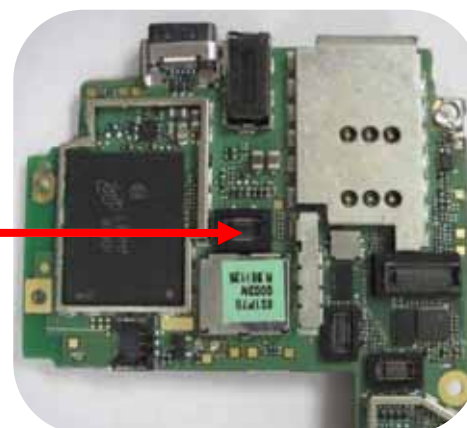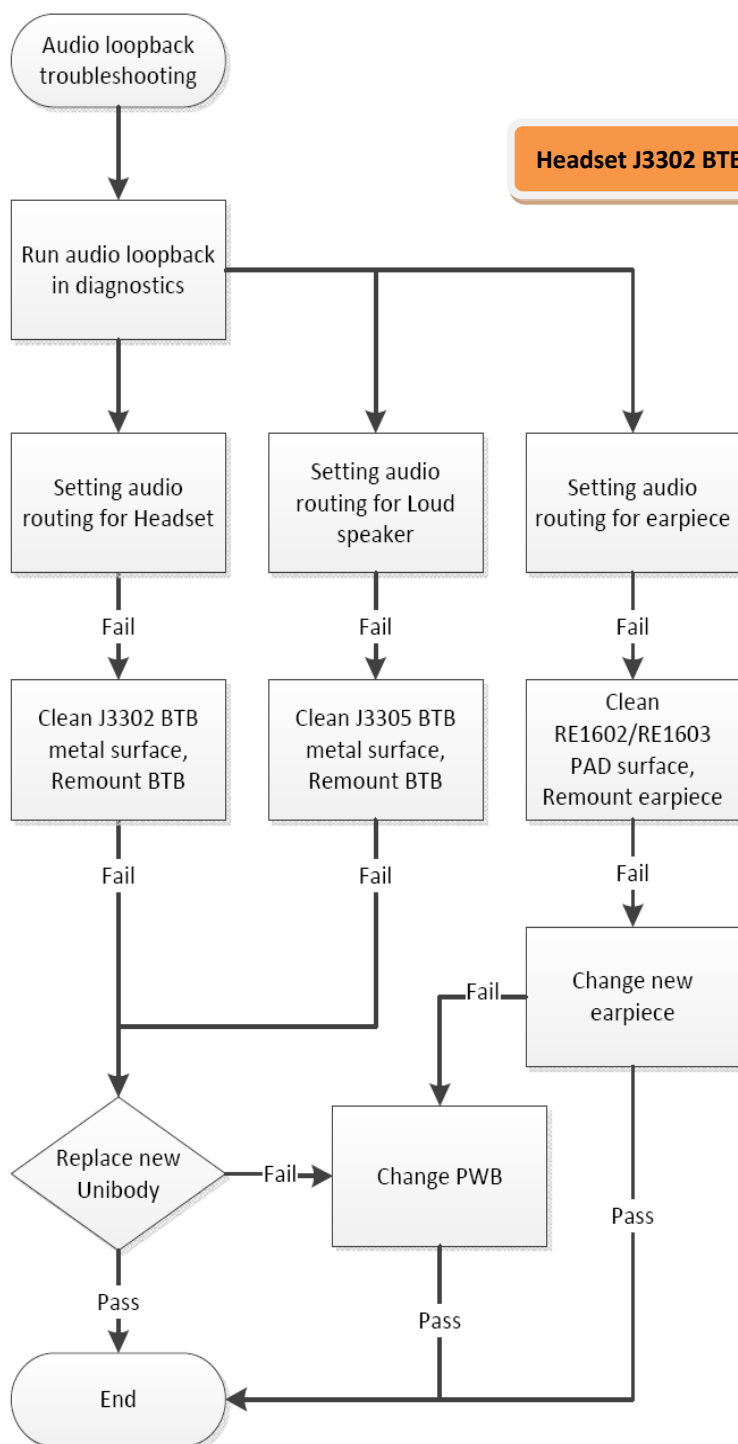

Headset J3302 BTB



Speaker J3305 BTB



Earpiece spring check



RE1602/RE1603 PAD

Spare part:


Issue 1

COMPANY CONFIDENTIAL
Copyright © 2011 Nokia. All rights reserved.

Page 3-29

Nokia Code	Supplier Material Code	Object Name	Description (Long)
8002359	78P3020001N	UNI BODY ASSY (MATT BLACK)	UNI BODY ASSY MATT BLACK
8002360	78P3020004N	UNI BODY ASSY (MATT CYAN)	UNI BODY ASSY MATT CYAN
8002361	78P3020003N	UNI BODY ASSY (MATT MAGENTA)	UNI BODY ASSY MATT MAGENTA
8002265	2242403003W	RECEIVER	RECEIVER 240326000041 10*4.8 NXP

Bluetooth troubleshooting

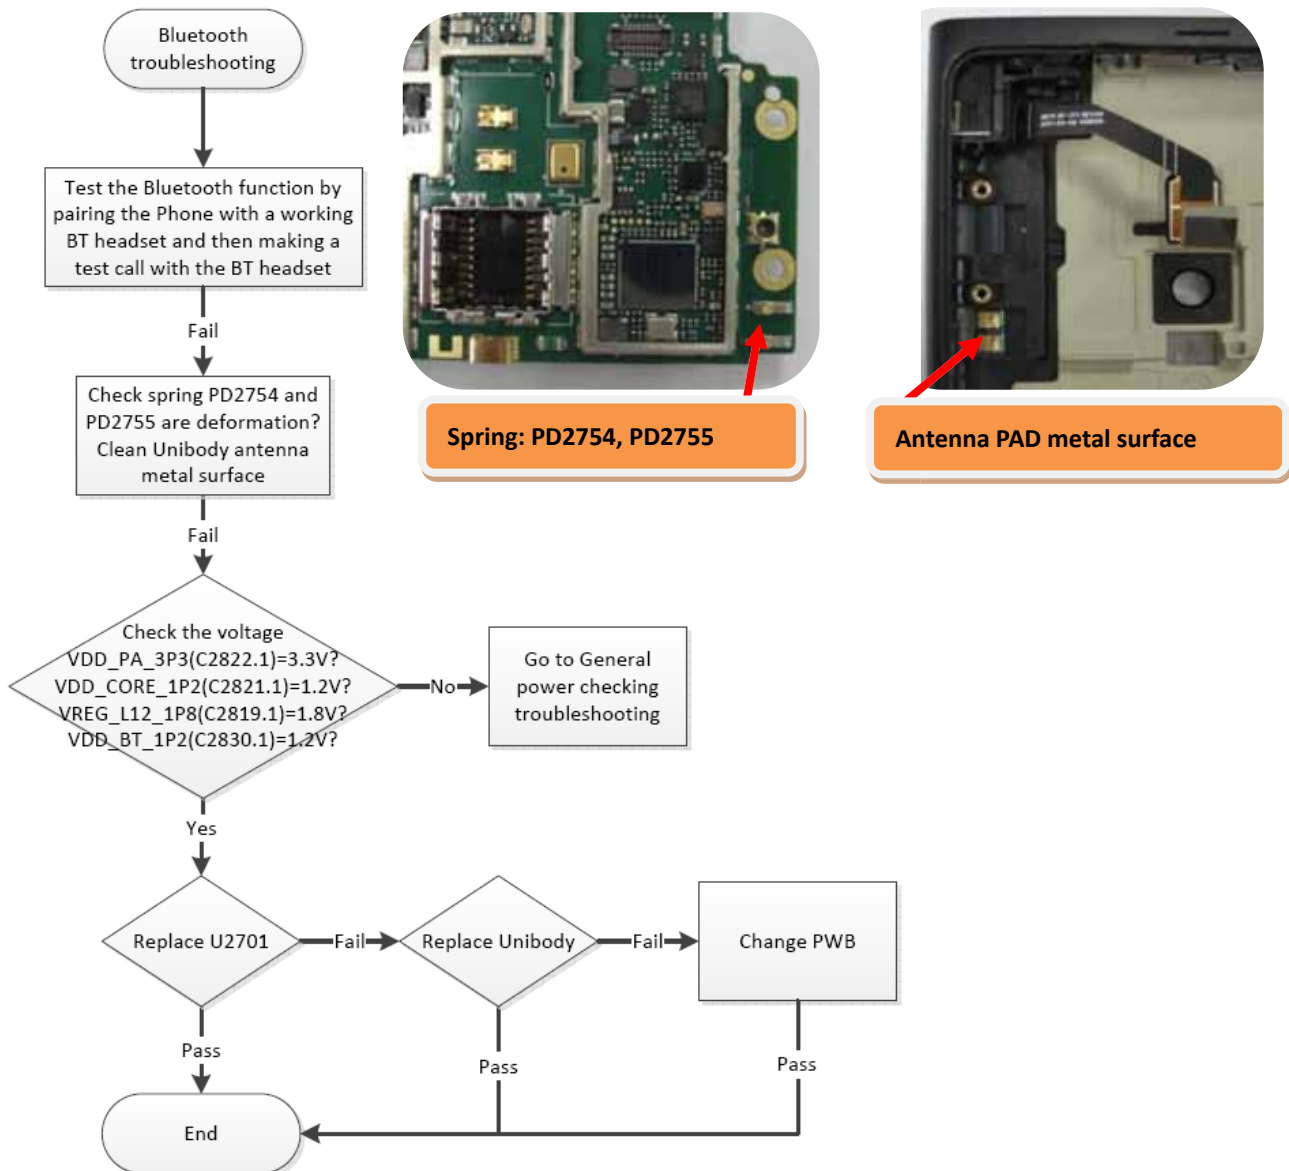

Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
4370757	0104329001R	WLAN/BTH/FM IC (U2701)	BCM4329EKUBG 182ball WLBGA
8002359	78P3020001N	UNI BODY ASSY (MATT BLACK)	UNI BODY ASSY MATT BLACK
8002360	78P3020004N	UNI BODY ASSY (MATT CYAN)	UNI BODY ASSY MATT CYAN
8002361	78P3020003N	UNI BODY ASSY (MATT MAGENTA)	UNI BODY ASSY MATT MAGENTA

Camera test

Displayed data:

- none

User can change settings for:

- none



User can test:

- The phone views a camera viewfinder and a picture can be taken by pressing camera button. Captured picture is viewed then on Camera test view.
- "Run Test Again" button will show camera viewfinder and new picture can be captured.

Pressing the back '←' key will navigate back to the main menu



Camera troubleshooting

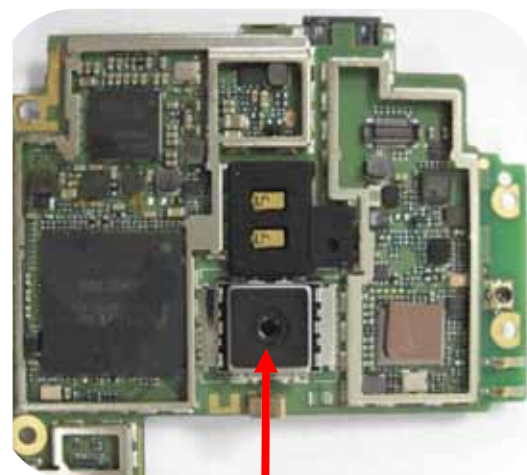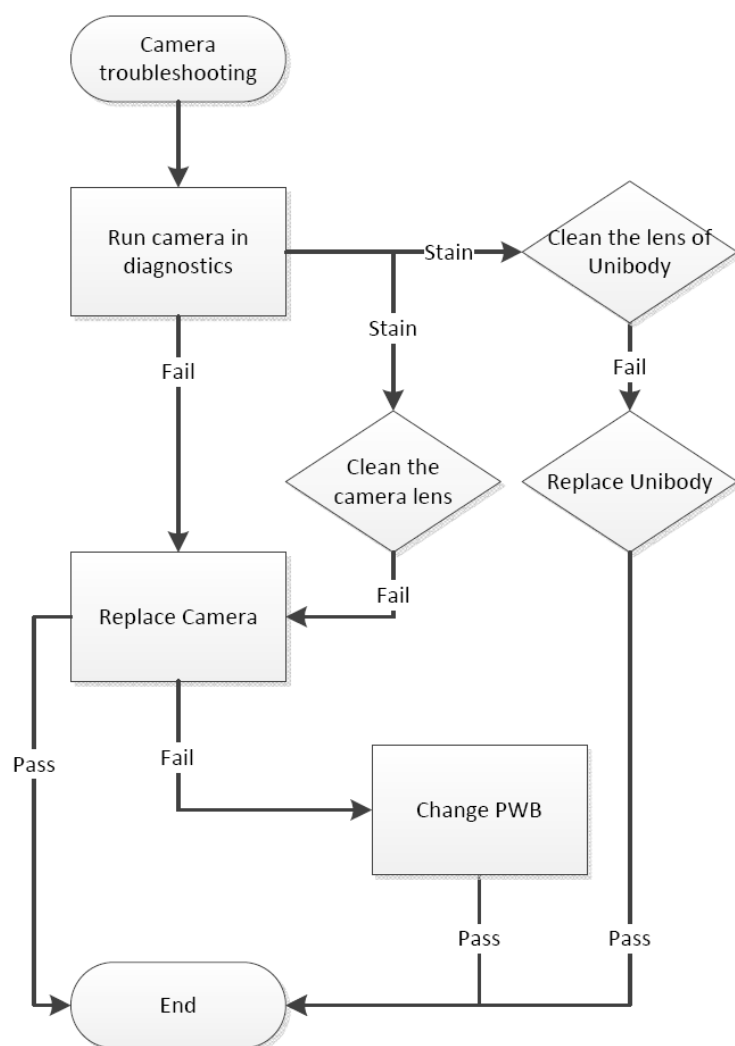

Camera lens



Unibody lens

Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
4858169	7651NB7203W	CAMERA MODULE CMOS TOSHI	CAMERA MODULE CMOS TOSHI
8002359	78P3020001N	UNI BODY ASSY (MATT BLACK)	UNI BODY ASSY MATT BLACK
8002360	78P3020004N	UNI BODY ASSY (MATT CYAN)	UNI BODY ASSY MATT CYAN
8002361	78P3020003N	UNI BODY ASSY (MATT MAGENTA)	UNI BODY ASSY MATT MAGENTA

Battery Status

Displayed data:

- Show the battery states
 - Battery voltage
 - Current
 - Full charge capacity
 - Remaining charge capacity


User can change settings for:

- none


User can test:

- none


Pressing the back '←' key will navigate back to the main menu

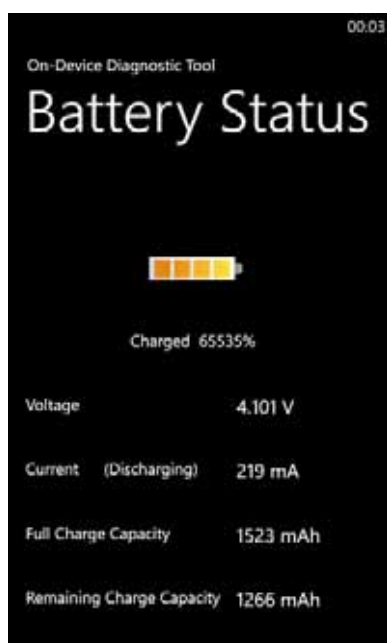

Battery troubleshooting

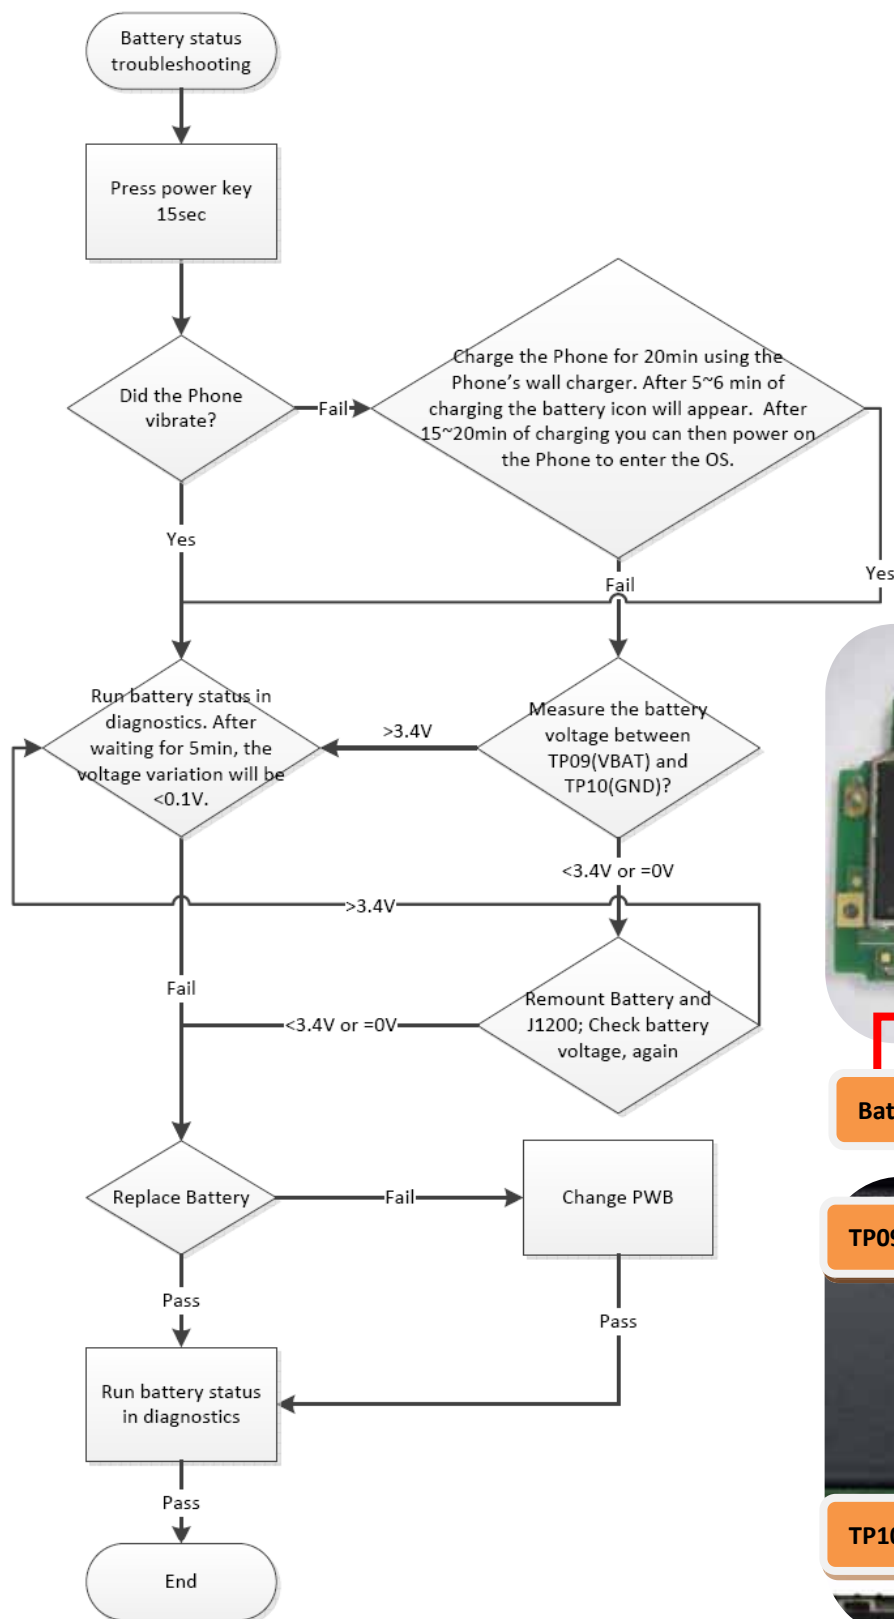

Battery Connector J1200

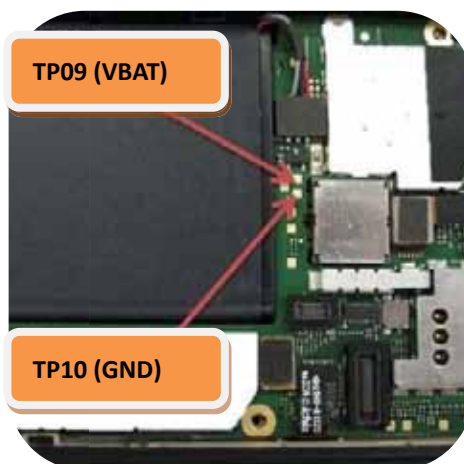

TP09 (VBAT)

TP10 (GND)

DTMF test

DTMF test will proceed along a predefined pattern of sound output from the loud speaker followed by sound output from the earpiece. The UI will display the various DTMF buttons (1 – 0, A –D, * and #) which will produce the appropriate tones when tapped

Displayed data:

- The status message will update to display the current sound output device

User can change settings for:


- Audio routing output
 - Earpiece
 - Loud speaker

User can test:


- Once a key has been tapped, it will change color to recognize the event
- Once a key has been tapped the "Continue" button will activate
- Tapping "Continue" button will proceed to next test and any previously tapped keys will be reset

Pressing the back '←' key will navigate back to the main menu


Test by Earpiece Test by Loudspeaker

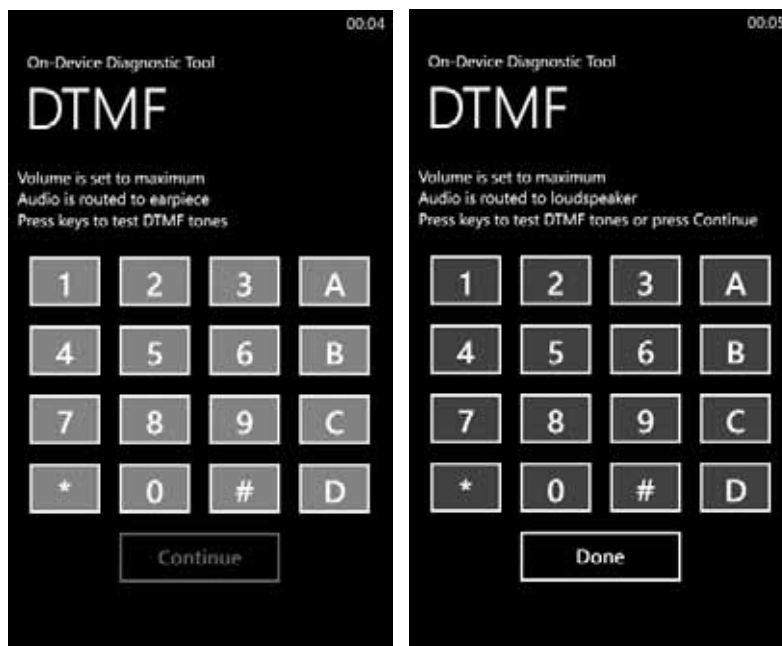

DTMF troubleshooting

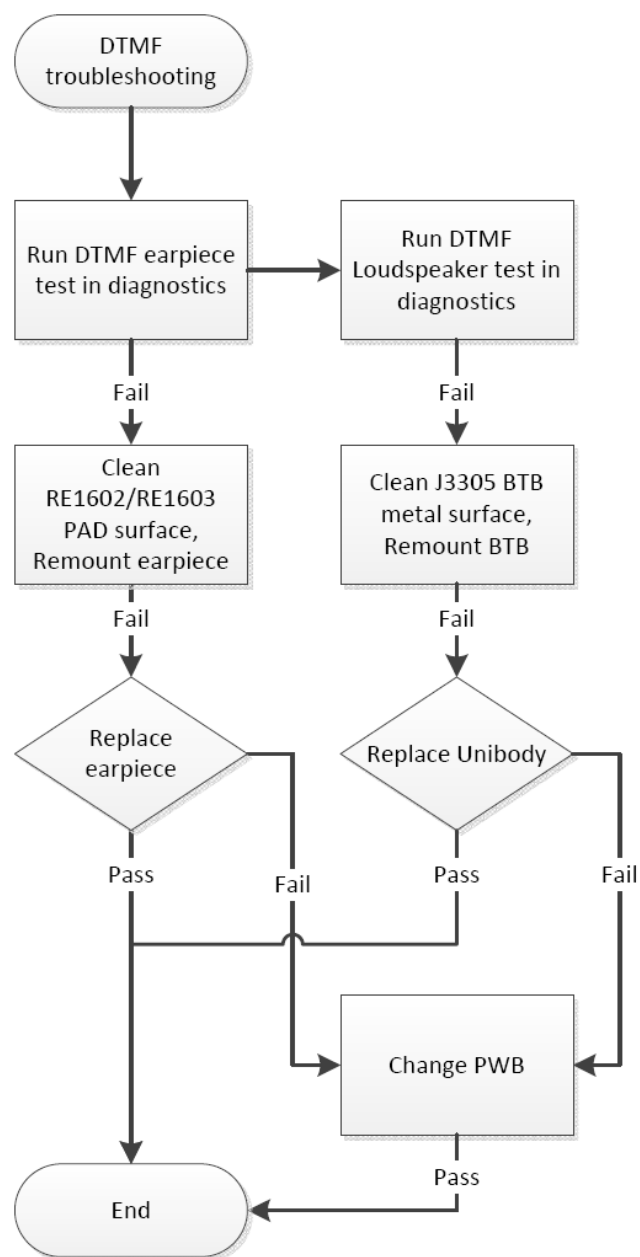

RE1602/RE1603 PAD

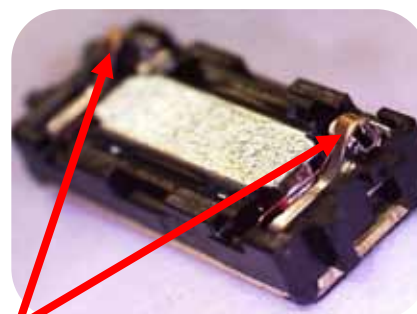

Earpiece spring check



Speaker J3305 BTB

Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
8002359	78P3020001N	UNI BODY ASSY (MATT BLACK)	UNI BODY ASSY MATT BLACK
8002360	78P3020004N	UNI BODY ASSY (MATT CYAN)	UNI BODY ASSY MATT CYAN
8002361	78P3020003N	UNI BODY ASSY (MATT MAGENTA)	UNI BODY ASSY MATT MAGENTA
8002265	2242403003W	RECEIVER	RECEIVER 240326000041 10*4.8 NXP

Headset detection test

Headset test will allow the tester to check if a headset is connected or disconnected

Displayed data:

- The status image and message will update to display if headset is connected or disconnected

User can change settings for:

- none



User can test:

- If a headset not connected, then the display will show an 'X' mark on the headset image and the status message will display 'Disconnected'
- Once a headset has been connected, the 'X' mark will disappear and the status message will change to 'Connected'

Pressing the back '←' key will navigate back to the main menu



Headset detection troubleshooting

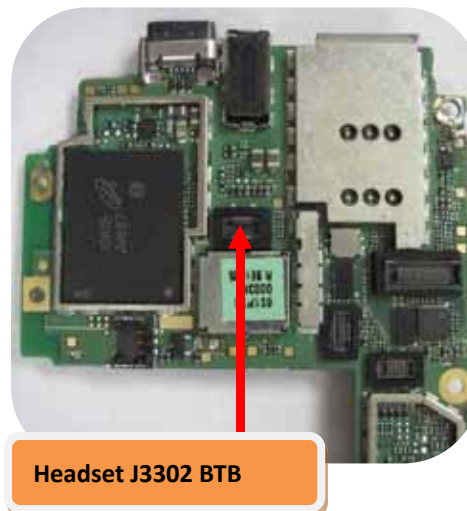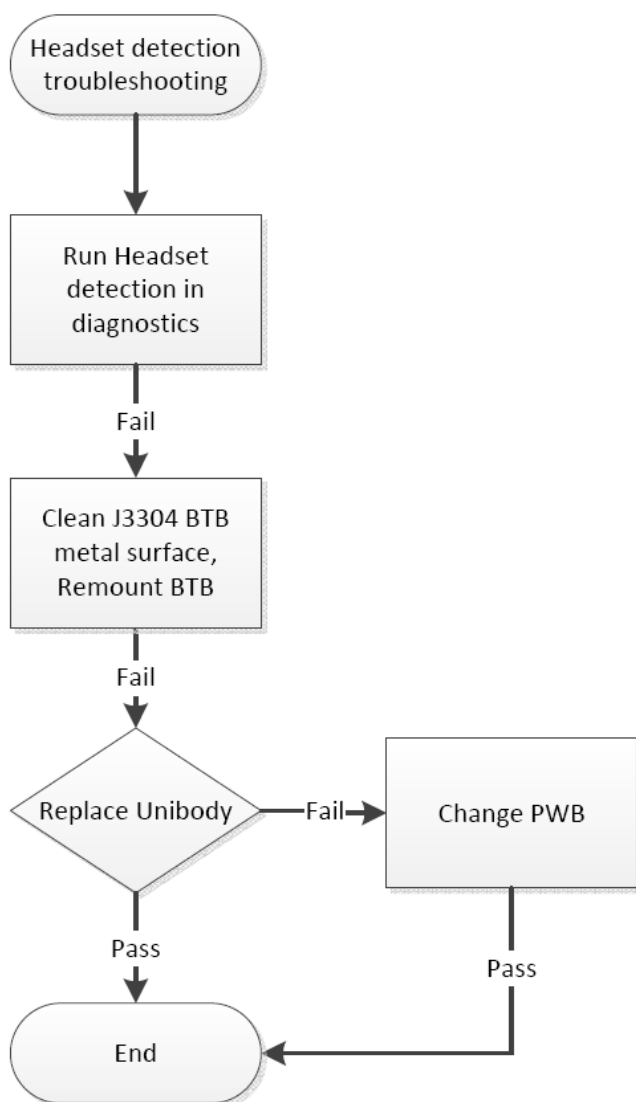

Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
8002359	78P3020001N	UNI BODY ASSY (MATT BLACK)	UNI BODY ASSY MATT BLACK
8002360	78P3020004N	UNI BODY ASSY (MATT CYAN)	UNI BODY ASSY MATT CYAN
8002361	78P3020003N	UNI BODY ASSY (MATT MAGENTA)	UNI BODY ASSY MATT MAGENTA

LCD White

Displays color screens for verifying pixel integrity

Displayed data:

- Display color screens will reveal five kinds of color.
 - White
 - Black
 - Red
 - Green
 - Blue


User can change settings for:

- none


User can test:

- When the user to touch the display, the display will replace new color from white to blue.

Pressing the back '←' key will navigate back to the main menu

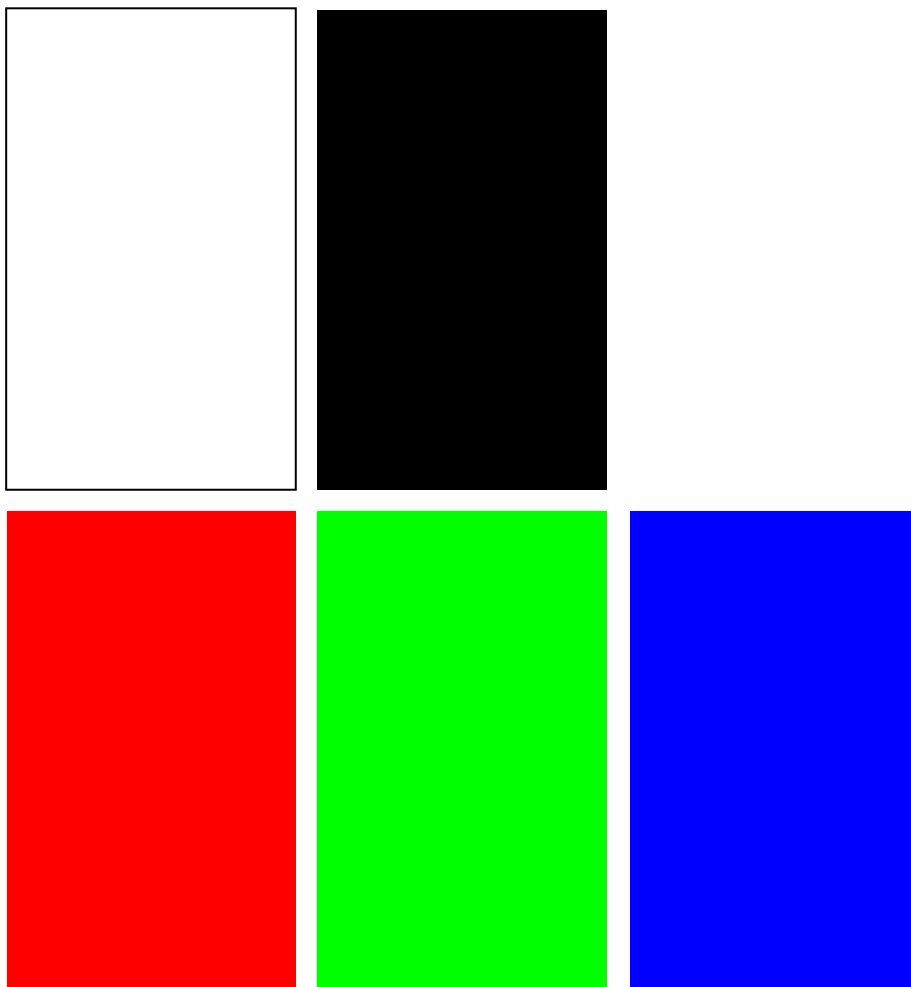

LCD troubleshooting

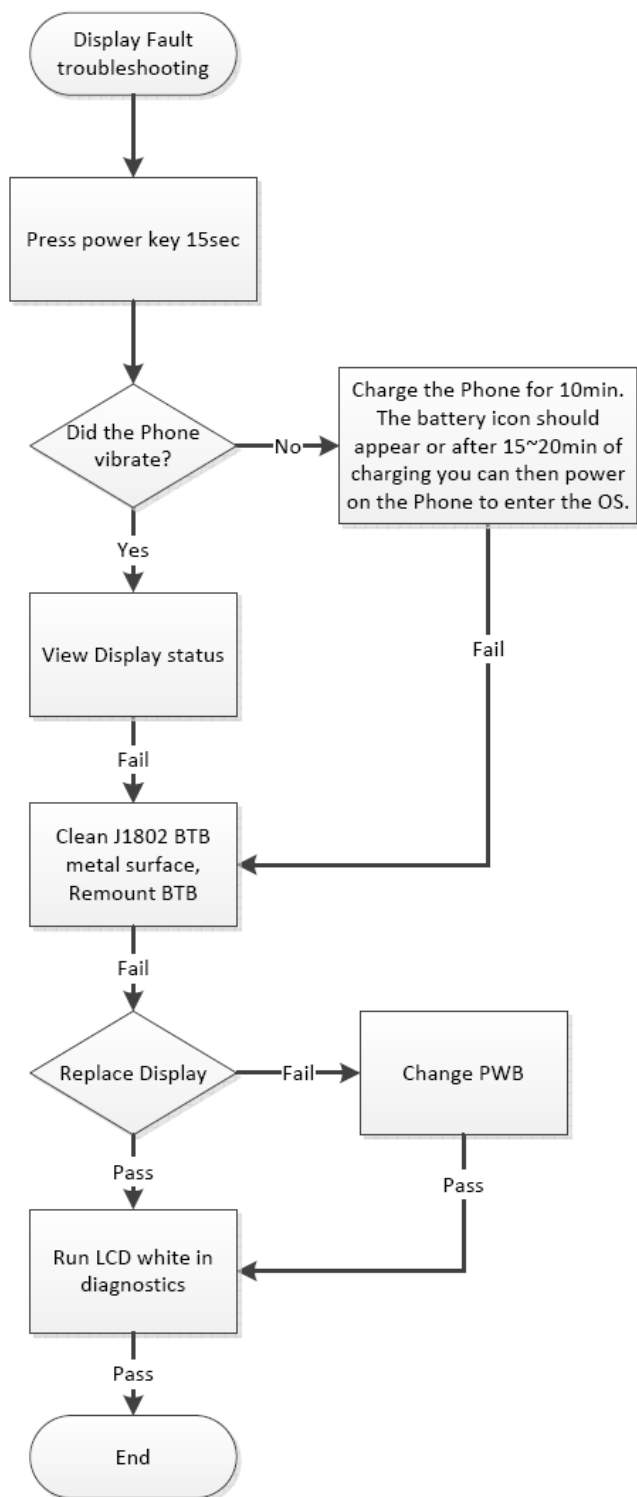

Display J1802 BTB

Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
8002365	78P3050001N	DISPLAY ASSY	DISPLAY + LCD SPONGE

Lights test

Displayed data:

- none

User can change settings for:

- Manual backlight intensity control:
 - When the toggle is in off position, backlight intensity is controlled by the ALS sensor value.
 - When the toggle is in on position, the user can change the backlight intensity by using the slider.
- Keypad backlight
 - When the toggle is in off position, keypad backlight is off and when toggle is on, the keypad backlight in on.
- Camera flash light
 - Camera flash control turns on the flash LED for 10 seconds.



User can test:

- That the backlight intensity can be varied.
- Display backlight can be turned off completely.
- The white rectangle helps the user to understand the intensity level better.
- Keypad backlight can be toggled.
- Camera flash can be toggled.



Pressing the back '←' key will exit the screen and take the user to the main menu




Lights troubleshooting

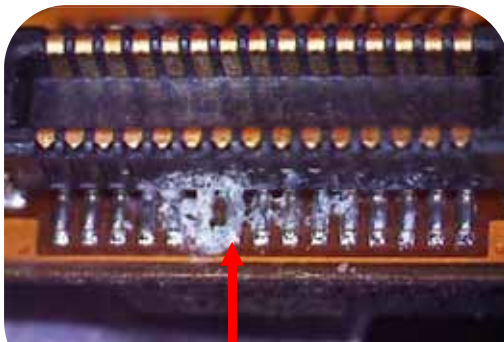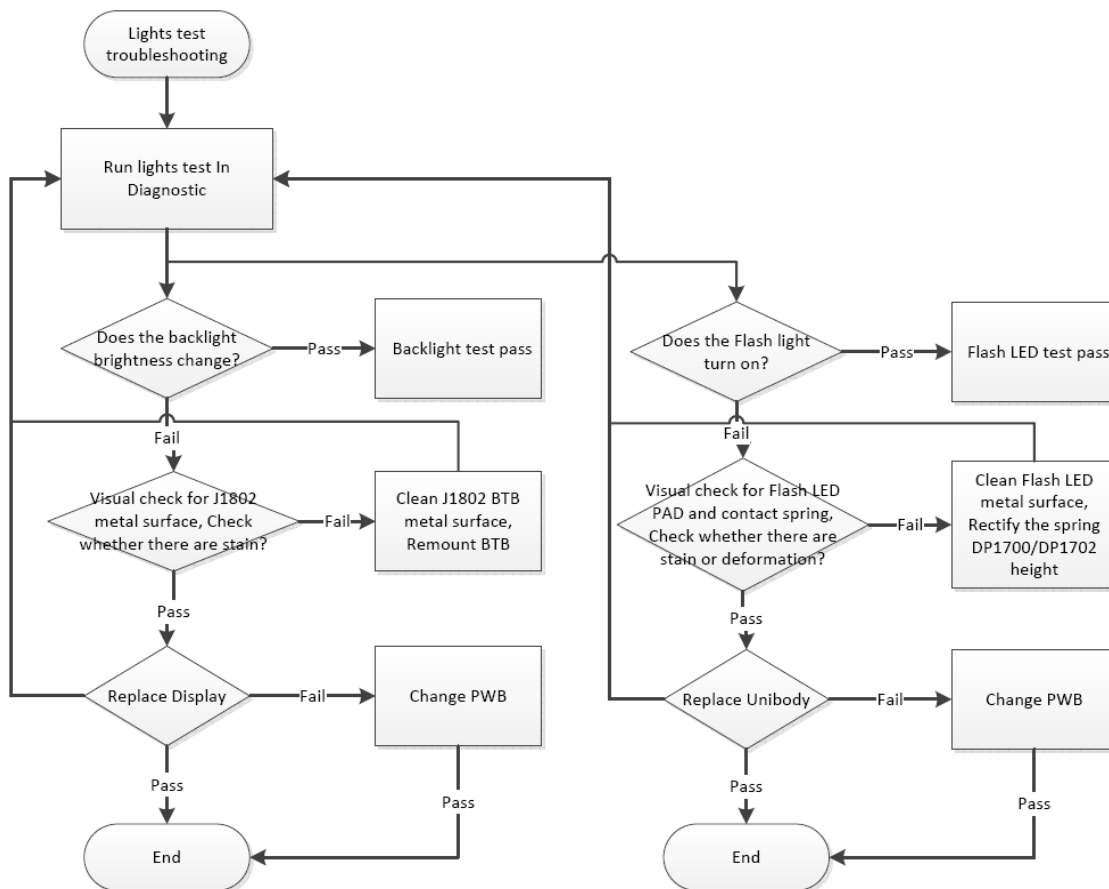

Example of Stain on J1802 BTB

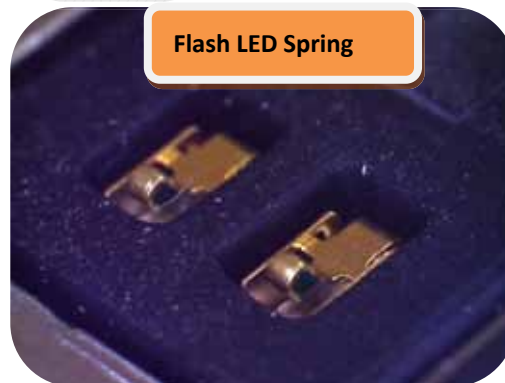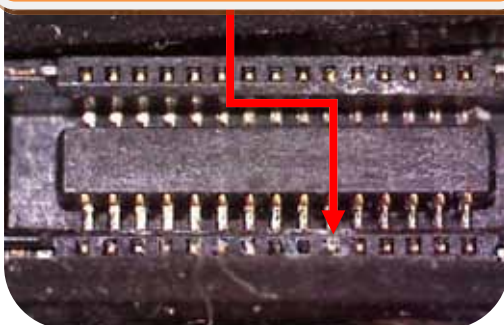

Flash LED Spring

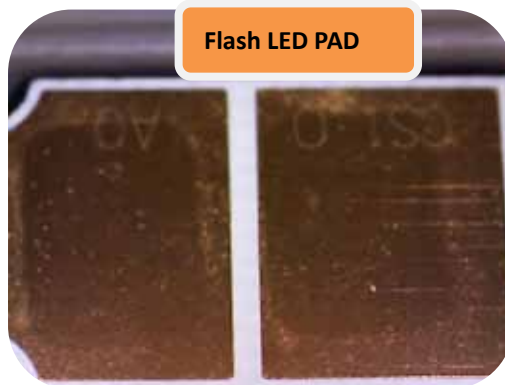

Flash LED PAD

Spare Part:
Page 3-43

Nokia Code	Supplier Material Code	Object Name	Description (Long)
8002359	78P3020001N	UNI BODY ASSY (MATT BLACK)	UNI BODY ASSY MATT BLACK
8002360	78P3020004N	UNI BODY ASSY (MATT CYAN)	UNI BODY ASSY MATT CYAN
8002361	78P3020003N	UNI BODY ASSY (MATT MAGENTA)	UNI BODY ASSY MATT MAGENTA
8002365	78P3050001N	DISPLAY ASSY	DISPLAY + LCD SPONGE

Hardware buttons test

Displayed data:

- All physical keys of the device

User can change settings for:


- none

User can test:


- Once a particular key has been pressed, it will change color to green
- When the pressed (green) button is released, the UI will not show that button anymore
- "Main Menu" button will close Hardware Buttons test

Pressing the back '←' key will change "Back" button color

NOTE: On RM-801 / RM-819, 'Back', 'Start', and 'Search' buttons are virtual (not hardware) and should not be tested.

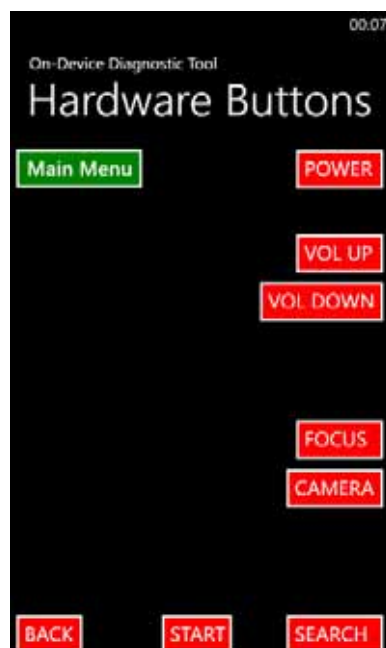

Hardware buttons troubleshooting

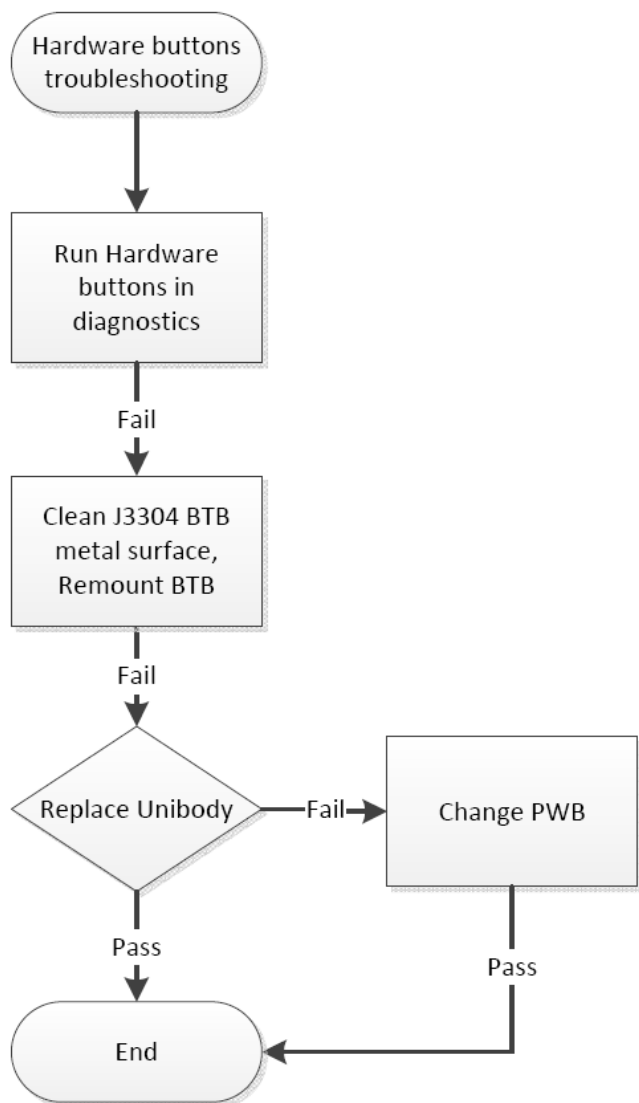

Side key J3304 BTB



Side key FPC

Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
8002359	78P3020001N	UNI BODY ASSY (MATT BLACK)	UNI BODY ASSY MATT BLACK
8002360	78P3020004N	UNI BODY ASSY (MATT CYAN)	UNI BODY ASSY MATT CYAN
8002361	78P3020003N	UNI BODY ASSY (MATT MAGENTA)	UNI BODY ASSY MATT MAGENTA

Magnetometer test

Displayed data:

- Numeric values for X, Y and Z direction movement
- Numeric values of angle offsets from true and magnetic north directions
- Raw data will be displayed


User can change settings for:

- none



User can test:

- Movements of the device will change displayed X, Y and Z values as well as magnetic and true north values
- The North direction will be visualized in a compass

Pressing the back '←' key will navigate back to the main menu

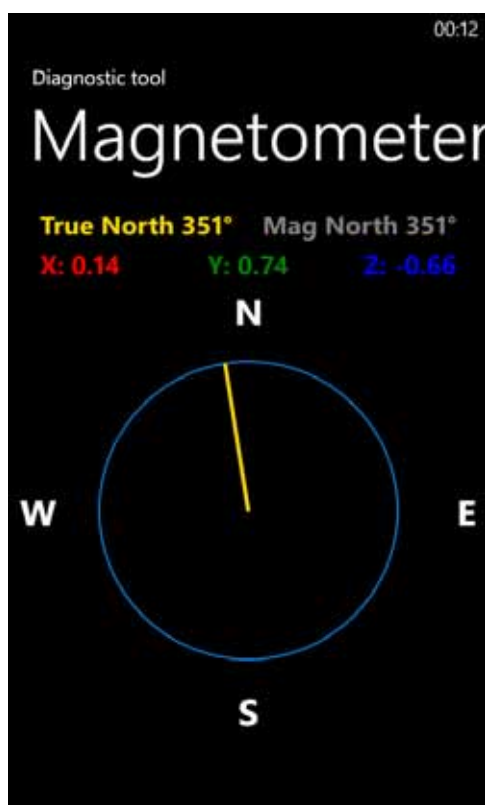

Magnetometer troubleshooting

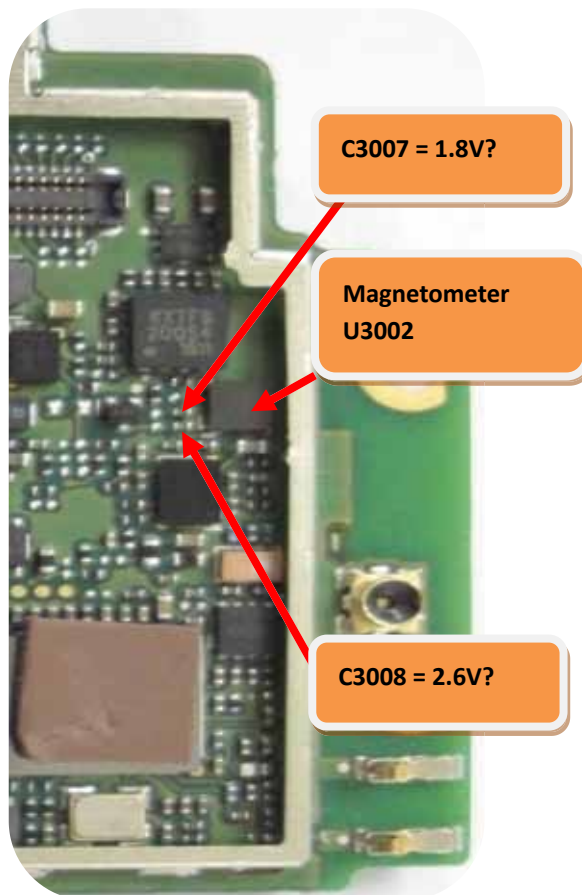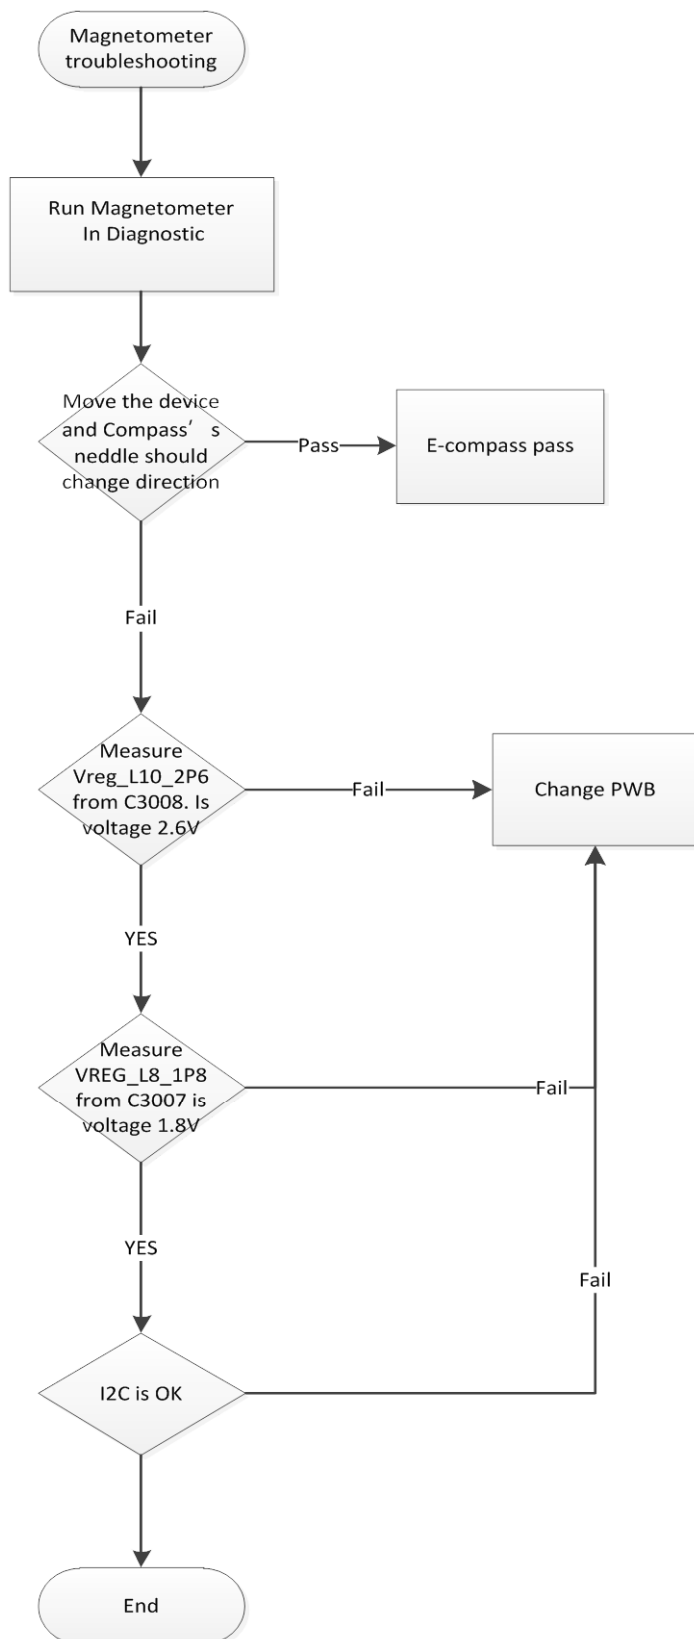

Power source (Charging) test

The power source test will allow the user to check what is currently powering the phone

Displayed data:

- An image of a battery will display when the phone is running on battery power and the image of a power plug if the phone is running on an external source (USB or wall charger)


User can change settings for:

- none


User can test:

- What source is powering the phone (battery/ external)

Pressing the back '←' key will navigate back to the main menu

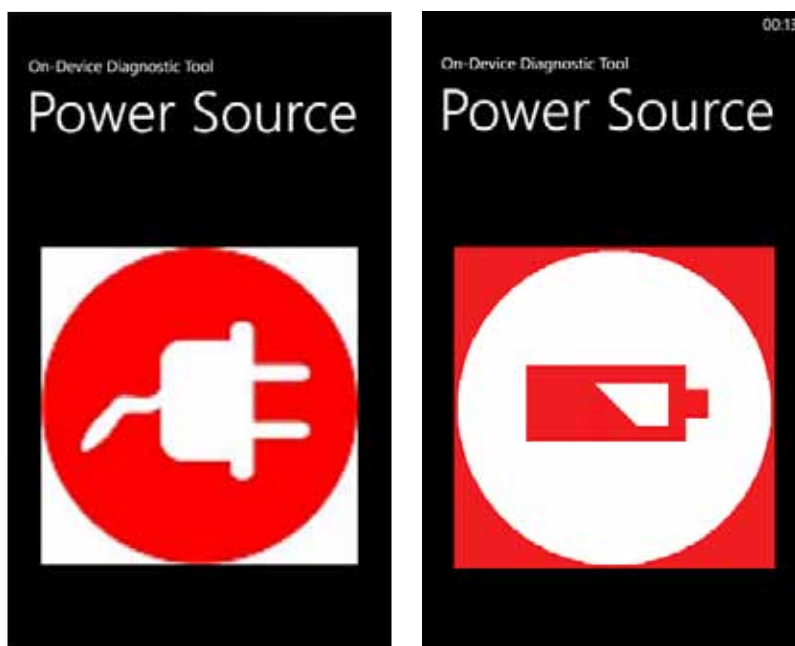

Power source (Charging) troubleshooting

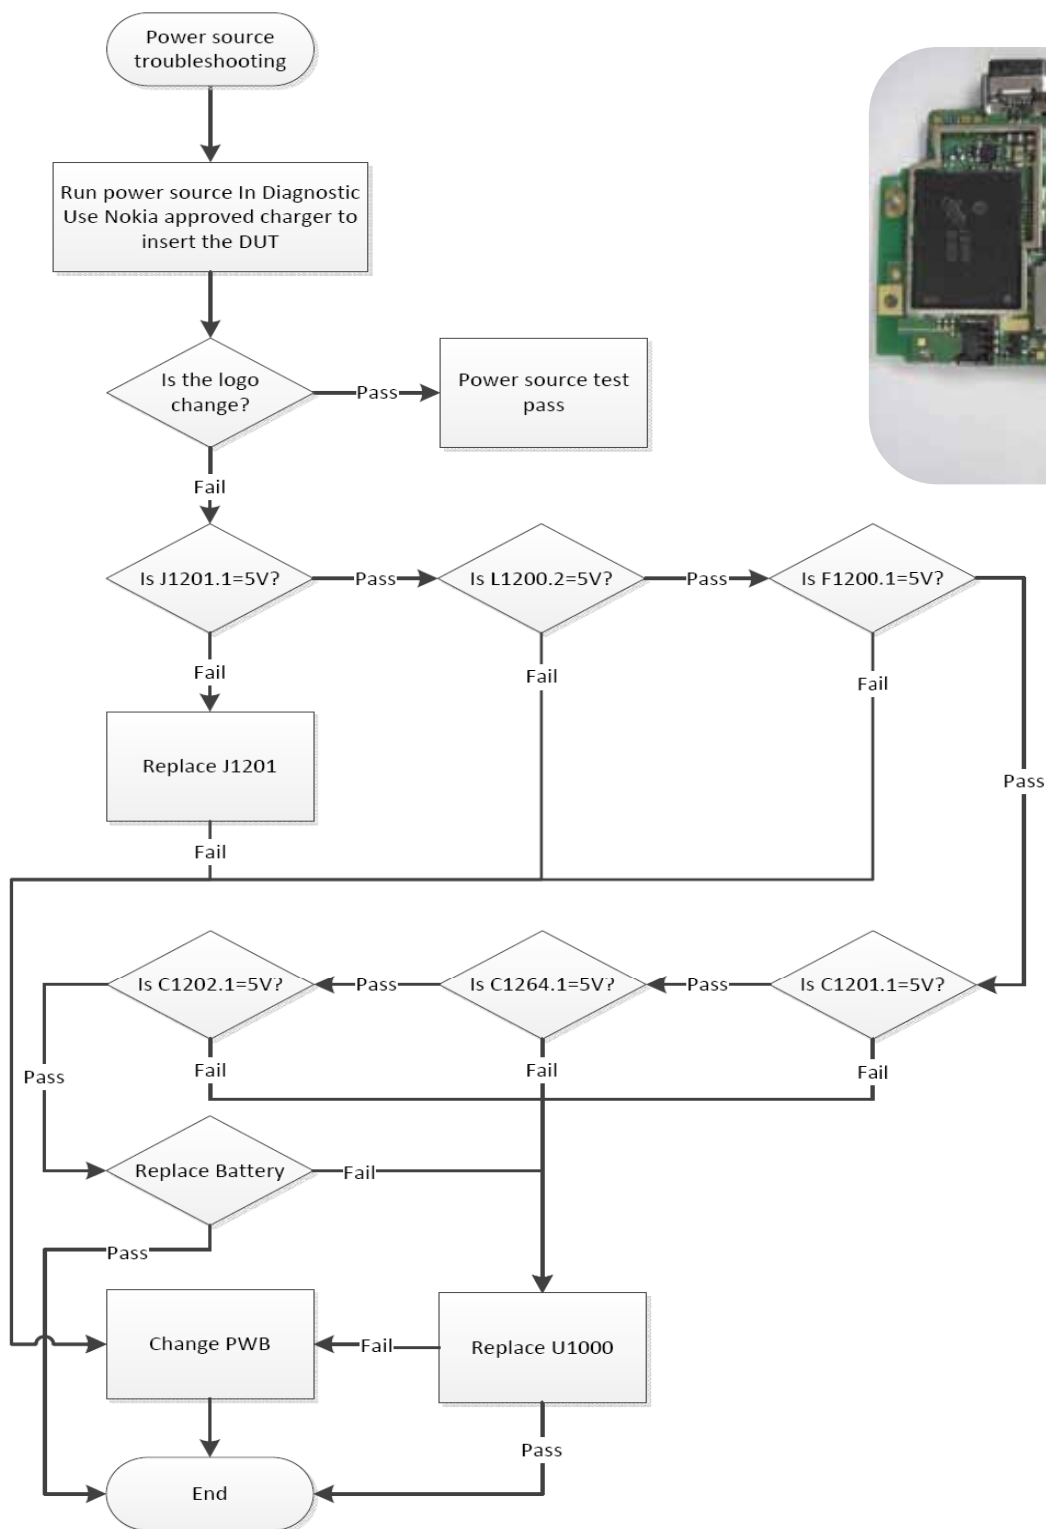

Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
8002354	2336000012W	USB CONN	USB CONNECTOR
0670633	761NB72171R	BATTERY	BATTERY
8002332	303MNB7201W	BATTERY SPONGE	BATTERY SPONGE
8002352	0480805801C	IC PMU	POWER MANAGEMENT IC QUALCOMM

Proximity test

The proximity test will allow the user to check if the proximity sensor is able to detect the presence of an object in front of it.

Displayed data:

- A filled circle (Yellow or Green in color) and information text (not-detected or detected)


User can change settings for:

- none



User can test:

- If the proximity sensor is able to detect an object in front of it

Pressing the back '←' key will exit the application

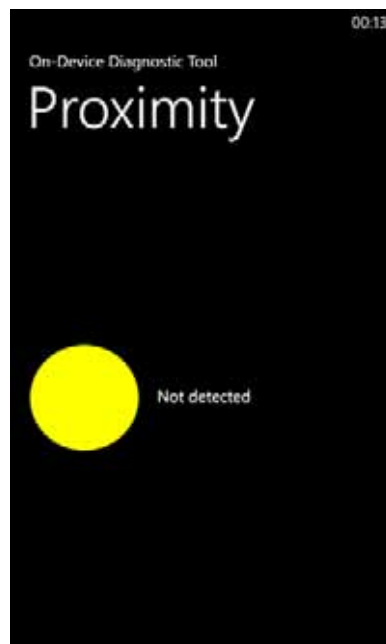

Proximity troubleshooting

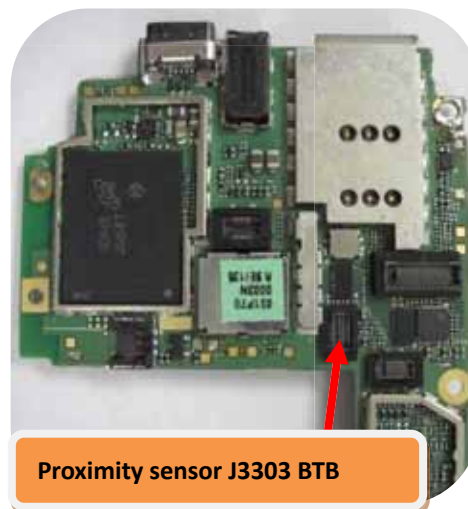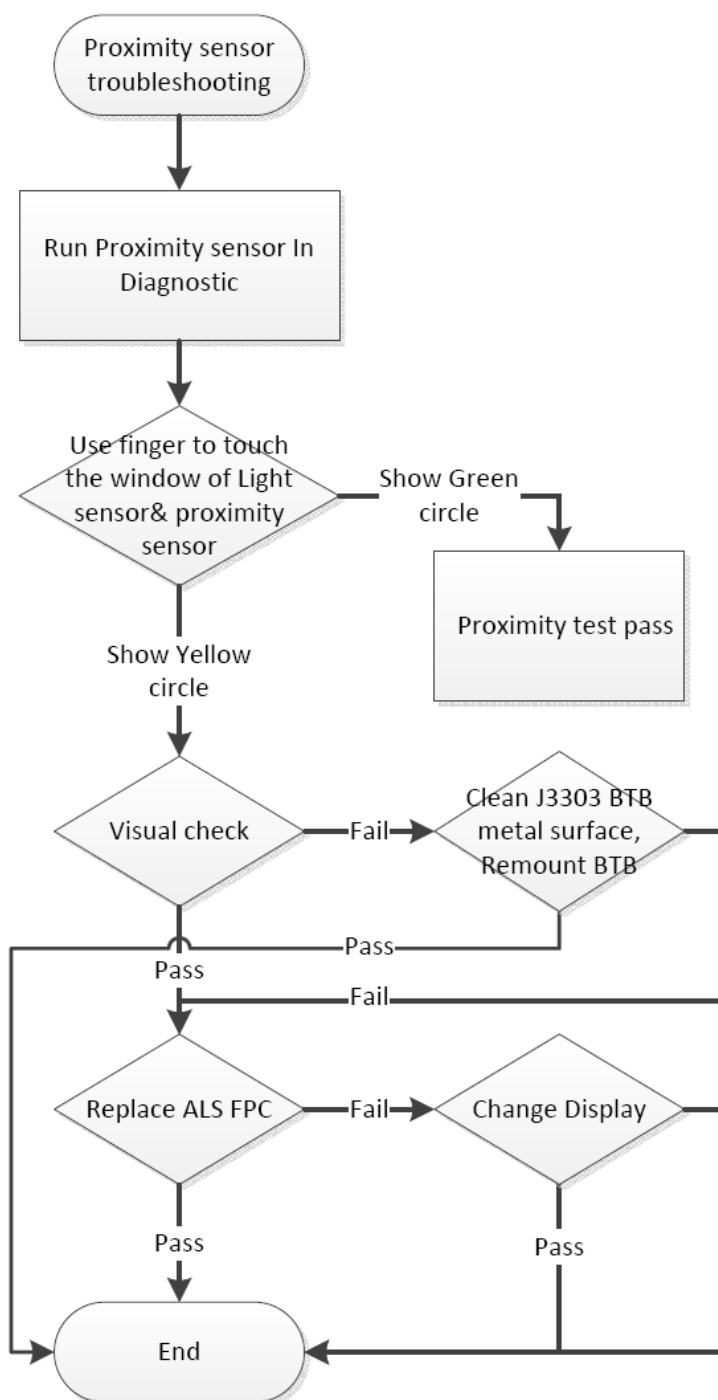

Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
8002364	78P3060001N	ALS/PROXIMITY FPC ASSY	ALS/PROXIMITY FPC + SPONGE
8002365	78P3050001N	DISPLAY ASSY	DISPLAY + LCD SPONGE

Speaker test

The speaker test will allow the user to check if the device speaker is functioning.

Displayed data:

- None

User can change settings for:


- Melody playing. Melody will play when the user taps 'Play'. If melody is playing the button will change to 'Stop'

User can test:


- When melody is playing the user should be able to hear the tune via the speaker

Tapping 'Done' will end the test and exit the application

Pressing the back '←' key will navigate back to the main menu

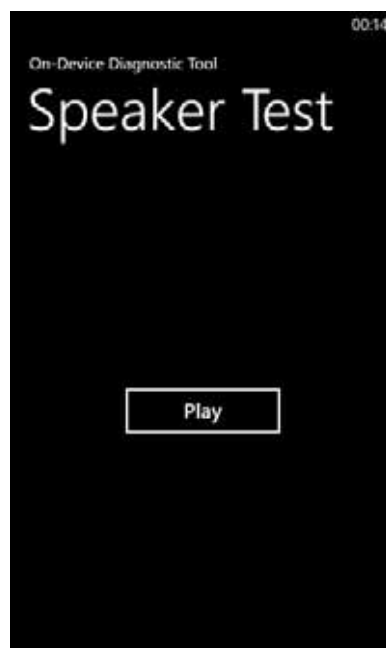

Speaker troubleshooting

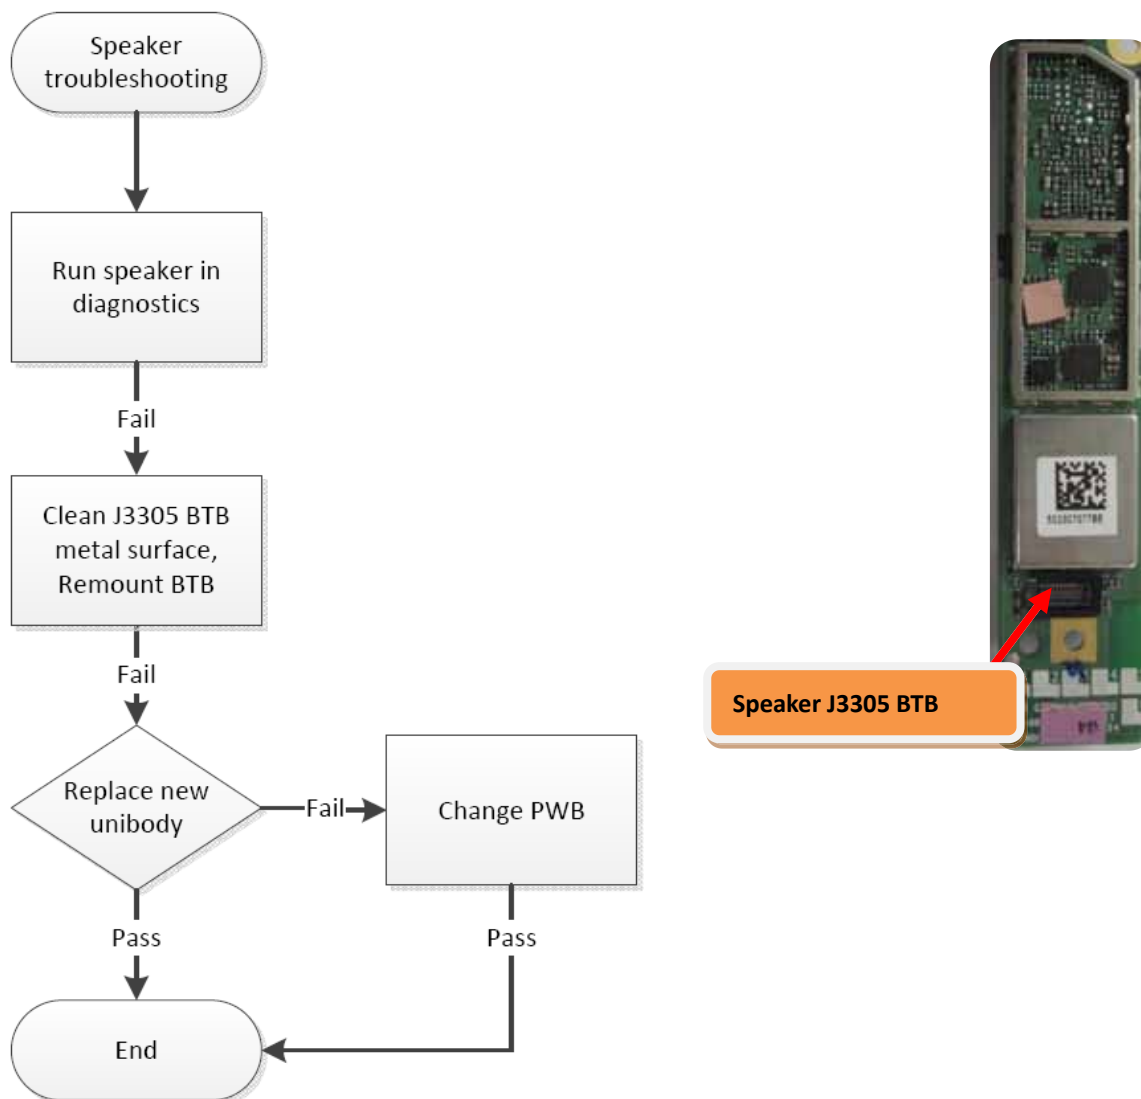

Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
8002359	78P3020001N	UNI BODY ASSY (MATT BLACK)	UNI BODY ASSY MATT BLACK
8002360	78P3020004N	UNI BODY ASSY (MATT CYAN)	UNI BODY ASSY MATT CYAN
8002361	78P3020003N	UNI BODY ASSY (MATT MAGENTA)	UNI BODY ASSY MATT MAGENTA

Touch test

Displayed data:

- none


User can change settings for:

- none



User can test:

- By moving finger on the white area of the screen, phone will draw a black line according finger movement
- When the user lifts the finger off the screen, the "Done" button will show itself
- "Done" button will close Touch test

Pressing the back '←' key will navigate back to the main menu

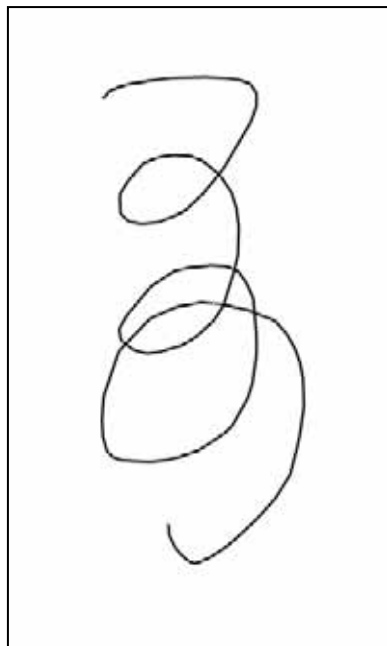

Touch troubleshooting

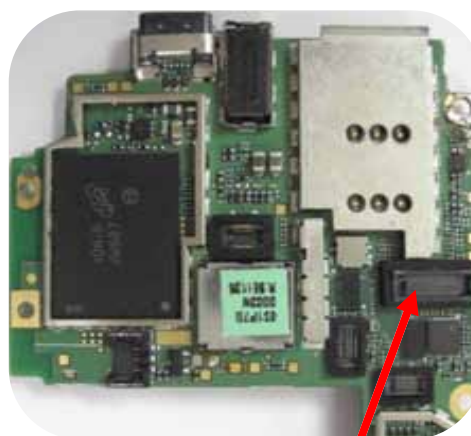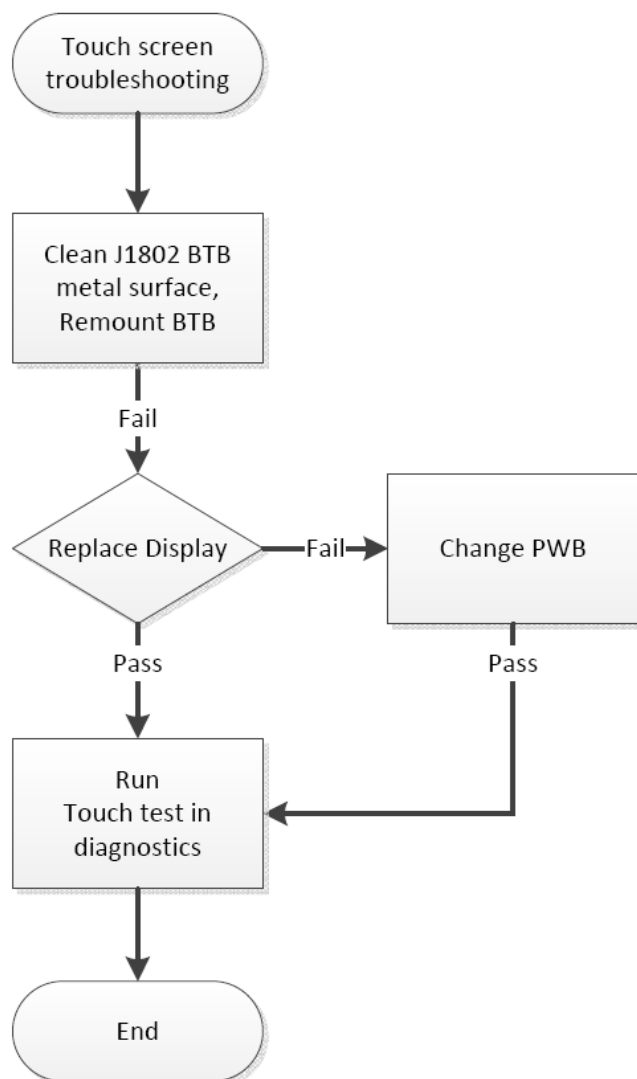

Touch screen J1802 BTB

Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
8002365	78P3050001N	DISPLAY ASSY	DISPLAY + LCD SPONGE

Vibrator test

Displayed data:

- none


User can change settings for:

- none



User can test:

- Pressing "start" button starts vibrator to vibrate and changes button text to "Done"
- Pressing "Done" button stops vibration and changes button text to "Start"


Pressing the back '←' key will navigate back to the main menu

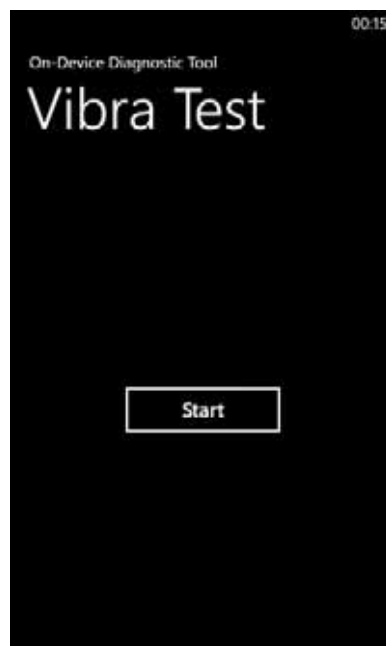

Vibrator Troubleshooting

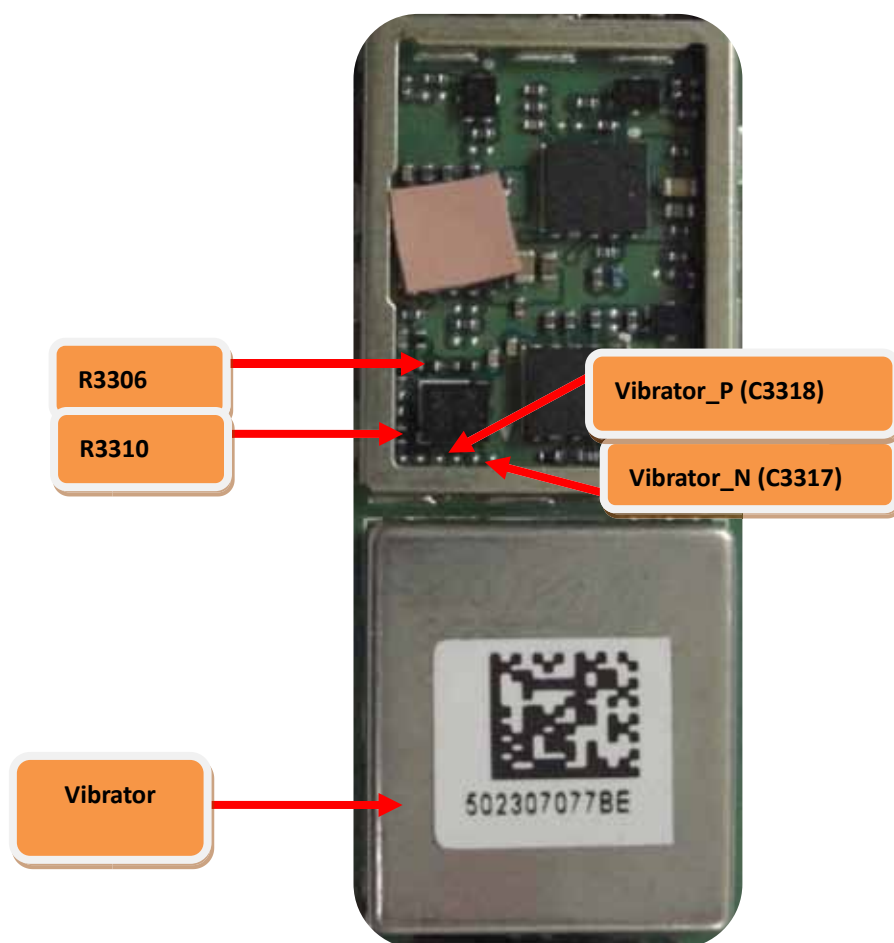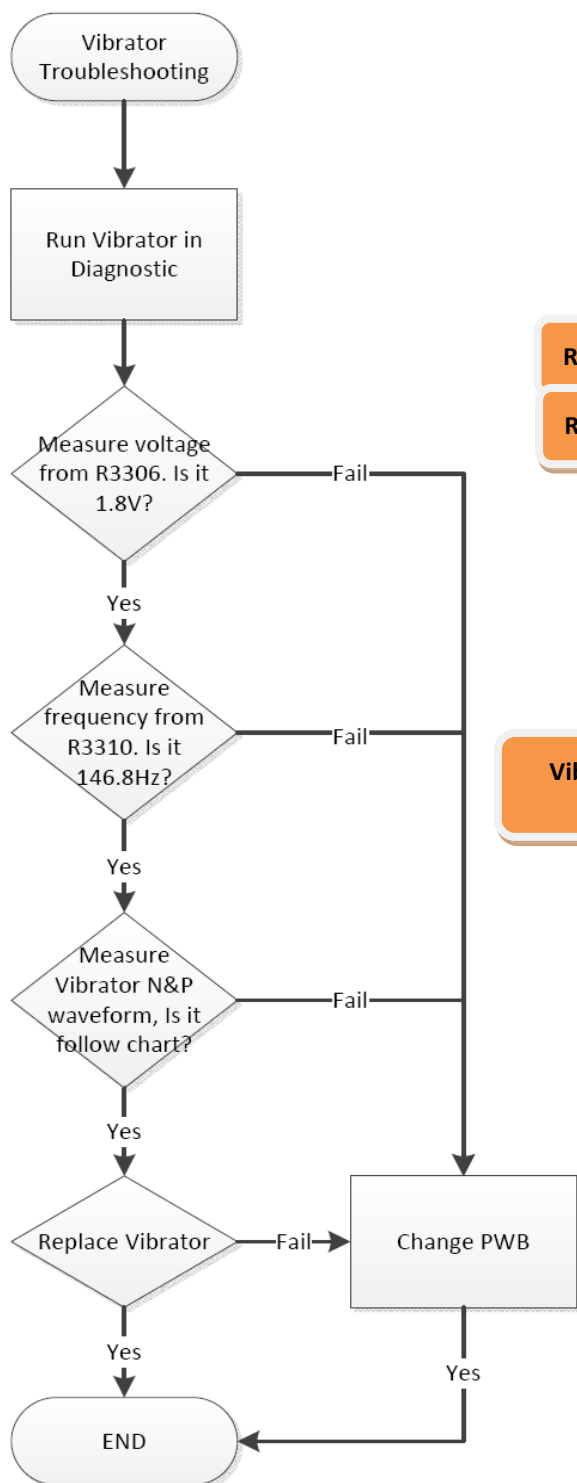


Vibrator operation timing chart

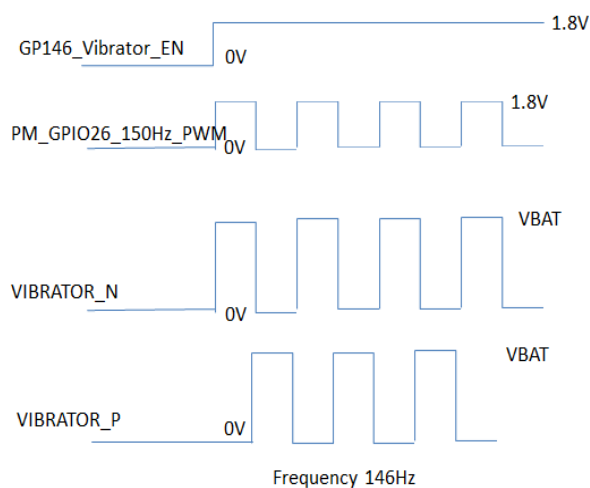

Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
8002355	3930000004W	VIBRATOR	VIBRA MOTOR

Wireless LAN troubleshooting

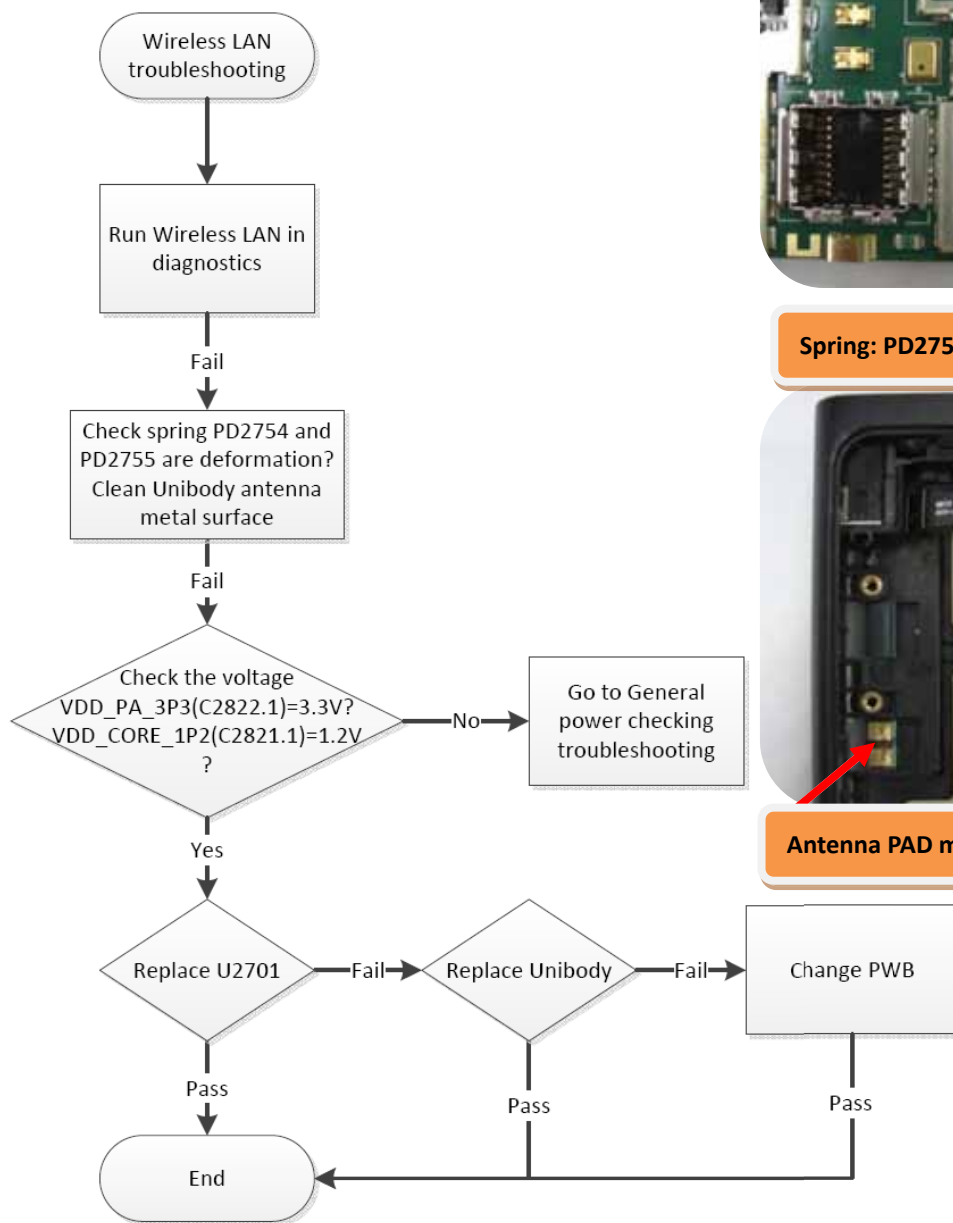

Spring: PD2754, PD2755



Antenna PAD metal surface

Spare part:

Nokia Code	Supplier Material Code	Object Name	Description (Long)
4370757	0104329001R	WLAN/BTH/FM IC	BCM4329EKUBG 182ball WLBGA
8002359	78P3020001N	UNI BODY ASSY (MATT BLACK)	UNI BODY ASSY MATT BLACK
8002360	78P3020004N	UNI BODY ASSY (MATT CYAN)	UNI BODY ASSY MATT CYAN
8002361	78P3020003N	UNI BODY ASSY (MATT MAGENTA)	UNI BODY ASSY MATT MAGENTA

Nokia Customer Care

4 - System Module

(This page left intentionally blank.)

Table of Contents

Introduction.....	4-5
Phone description	4-5
Phone key components and placement	4-5
System block introduction	4-8
Energy management	4-9
Battery and charging	4-9
BV5-JW battery	4-9
Charging	4-10
Normal and extreme voltages	4-10
USB.....	4-10
User interface	4-11
Display	4-11
Camera	4-11
Audio concept.....	4-11
Internal audio.....	4-12
FM radio interface	4-12
Bluetooth	4-13
RF description	4-13
Receiver (RX).....	4-13
Transmitter (TX)	4-13
Phone Schematic.....	4-15

List of Figures

Figure 6 Main board, Top side.....	4-6
Figure 7 Main board, bottom side.....	4-7
Figure 8 Battery pin order	4-9
Figure 9 Battery connector.....	4-9
Figure 10 Audio block diagram	4-11

List of Tables

Table 1 Nominal voltages.....	4-10
-------------------------------	------

(This page left intentionally blank.)

■ Introduction

Phone description

MSM8x55 is the first Qualcomm MSM device to use the package on package (POP) system.

Phone key components and placement

Function	Description (P/N)	Item Reference
MSM8x55	Arm 11 1.4G with POP package Qualcomm	U600
Camera socket	CMCS-85T330 JST	J1702
Micro-USB connector	ZX62WRD-B-5PC USB HRS	J1201
EMI/ESD Filter	EMI4183MUTAG ONSEMI	L1807 , L1703
SIM Switch	EVQ0P301K 5P TACT PANASONIC	J3201
POP LPDDR2	EDB4064B2PD-6D-F ELPIDA	TOP-U600
eMMC	THGBM4G7D2HBAIN TOSHIBA	U1500
MOSFET	Si2333CDS-T1-GE3 SOT-23 VISHAY	Q1200
IC BUFFER	NC7SP04L6X MICROPAC FAIRCHILD	U1002
RUIM	RSD-78545-001 MOLEX	J3200
3G PA	ACPM-5001-TR1/ACPM-5005-TR1/ACPM-5002-TR1 AVAGO	U2500/U2502/U2503
2G PA	TQM7M5013EDGE QUAD TRIQUINT	U2400
WiFi/BT/FM module	BCM4329XKUBG_WLBGA BROADCOM	U2701
CURR-FUSE	ERBRE2R00V2A 32V 0603 PANASON	F1200
RF Transceiver	WCDAM / GSM / GPS /FM	U1900
RF connector	MM8130-2602R 6P MURATA	ANS2600, ANS2752,ANS2900
TX SAW B1	SAFEB1G95KA0F00 1950MHZ MURATA	F2505
TX SAW B8	SAFEB897MAL0F00 897MHz MURATA	F2502
TX SAW B2	SAFEB1G88KA0F00R14 MURATA	F2504
CRYSTAL	NX2520SA 19.2MHz 7PF 10PPM NDK	Y1000
CRYSTAL	NX2016AA 24.576MHz 12pF 30PPM	X800
CRYSTAL	FC-135 32.768KHz 9pF 20PPM EPS	Y1001
CRYSTAL	SAFEB897MAL0F00 897MHz MURATA	Y2700
IC LDO	S-1132B28-I6T2G SNT-6A(H) SII	U1706
IC S.R	NCP1529MUTBG UDFN6 ONSEMI	U1302
IC S.R	LM3555TLX MICRO SMD NS	U1701
FPC connector LCM	51338-0374 30P P.4 MOLEX	J1802
FPC connector	AXE516124 PANASONIC	J3305,J3400
FPC connector	AXT310124 10P P.4 PANASONIC	J3302
FPC connector	AXE510124 10P P.4 PANASONIC	J3303,J3304
Rx SAW filter	SAWEN1G84BH0F00 1842MHz MURATA	F2604

Rx SAW filter	SAFEB942MFM0F00 942.5MHz MURAT	F2603
DUPLEXER	ACMD-7410-TR1 1900MHz AVAGO	FL2501
DUPLEXER	FAR-D5NF-942M50-P1GWQ TAIYO	FL2503
DUPLEXER	LW11D WCDMA BAND 1 EPCOS	FL2500
BALUN	LDM181G9310CC001 SMT MURAT	U2504
IC GAUGE	BQ27520YZFR-G1 DSBGA TI	U2601
COMP SENS	AK8975C WL-CSP(BGA) AKM	U3202
G SENS	KXTF9 LGA KIONIX	U3000
Light & Proximity sensor	NB72 GF-176 REV:0F PXY SENS FP	FPC

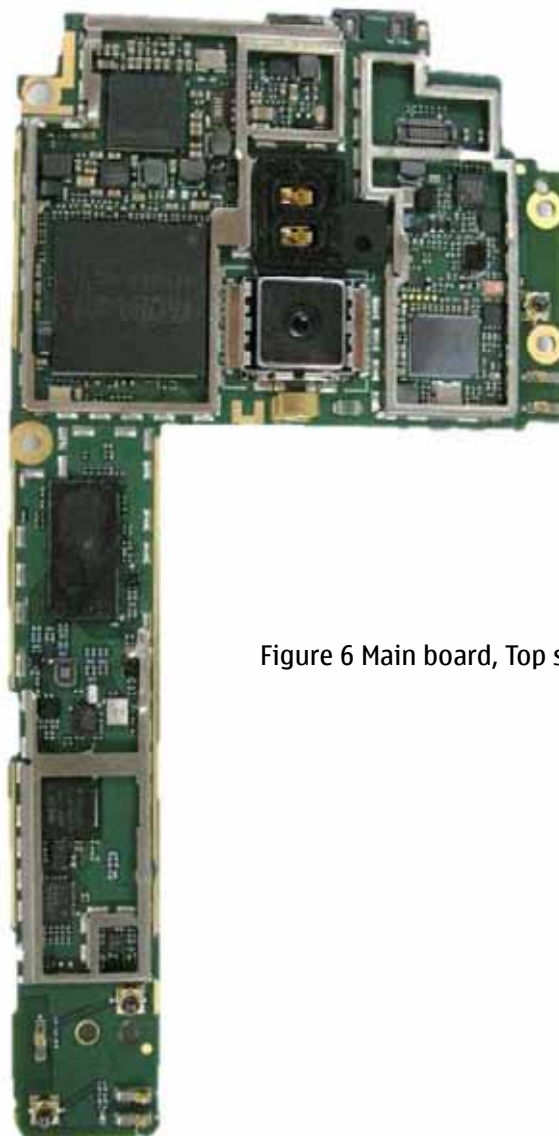


Figure 6 Main board, Top side


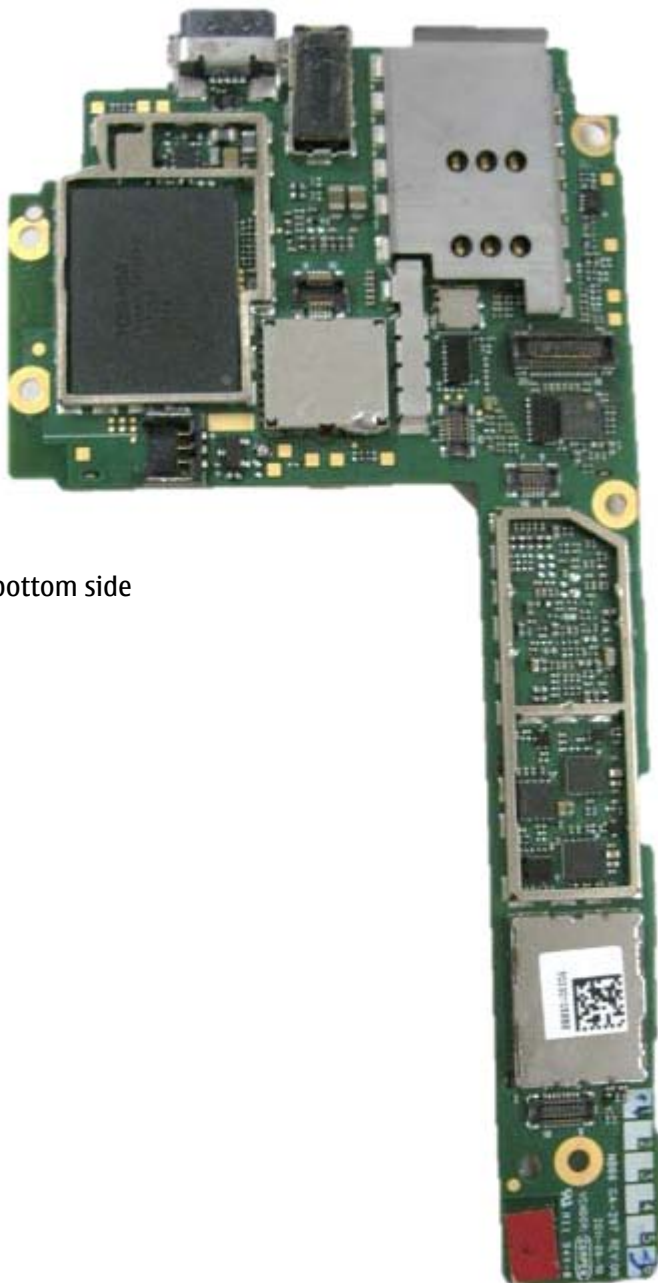


Figure 7 Main board, bottom side

System block introduction

MSM8x55 System Module.

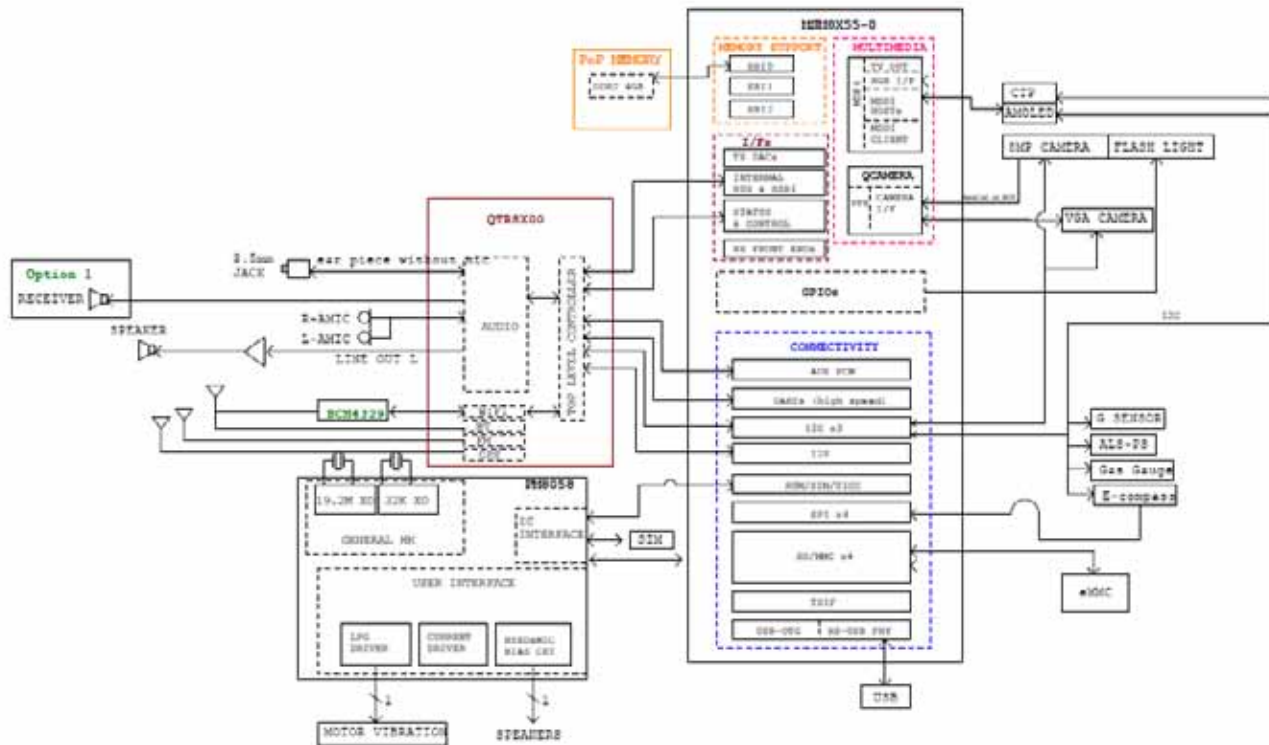

■ Energy management

Battery and charging

BV5-JW battery

The phone is powered by a 3-pole BV5-JW 1450 mAh battery. The three poles are named VBAT, GND and ID where the ID line is used to recognize the battery capacity. This is done by means of an internal battery pull down resistor.



Figure 8 Battery pin order

The battery connector is a blade connector. It has three blades,

- VBAT (Battery voltage)
- ID (Battery size indicator. The ID line is used to recognize the battery capacity by a BV5-JW battery internal pull down resistor 110Kohm).
- GND (Ground)



Figure 9 Battery connector

Charging

This phone is charged through the μ USB interface only (there is no separate connector for a charger). Supported are two charging modes for normal USB2.0 charging and Nokia μ USB AC-16 charger. Charging is controlled by energy management, and external components are needed to protect the baseband module against EMC, reverse polarity and transient frequency deviation.

Normal and extreme voltages

In the table below normal and extreme voltages are shown, when aBV5-JWbattery is used.

Table 1 Nominal voltages

Voltage	Voltage [V]	Condition
General conditions		
Nominal voltage	3.7	
Lower extreme voltage	3.4	
Higher extreme voltage(fast charging)	4.35	
HW shutdown voltages		
Vmstr +	2.6 \pm 0.1	off to on
Vmstr -	2.6 \pm 0.1	on to off
SW shutdown voltages		
SW shutdown	3.4	in call
Min operation voltage		
Vcoff +	3.4	off to on
Vcoff -	3.3	on to off

USB

In this phone the USB connector is the only physical connector, which means that the USB port is used both for data transfer as well as for charging. The USB 2.0 is supported with full speed (12 Mbps). It also supports hot swap, which means that USB devices may be plugged in/out at any time. This phone is provided with a specific connector for μ USB.



User interface

Display

The display used in RM-801 is AMOLED WVGA 4.2", display controller via MIPI.

Camera

The supported camera has a 8M pixels and a dedicated camera key.

Audio concept

The functional core of the audio hardware is built in QTR8x20.

QTR8x20 provides an interface for the transducers. Need external Audio AB class Amp for hands free (IHF) speakers

There are four audio transducers:

- 1 EARPICE for handset
- 1 speaker (external AB class for speaker driver)
- 1 HPH for headset

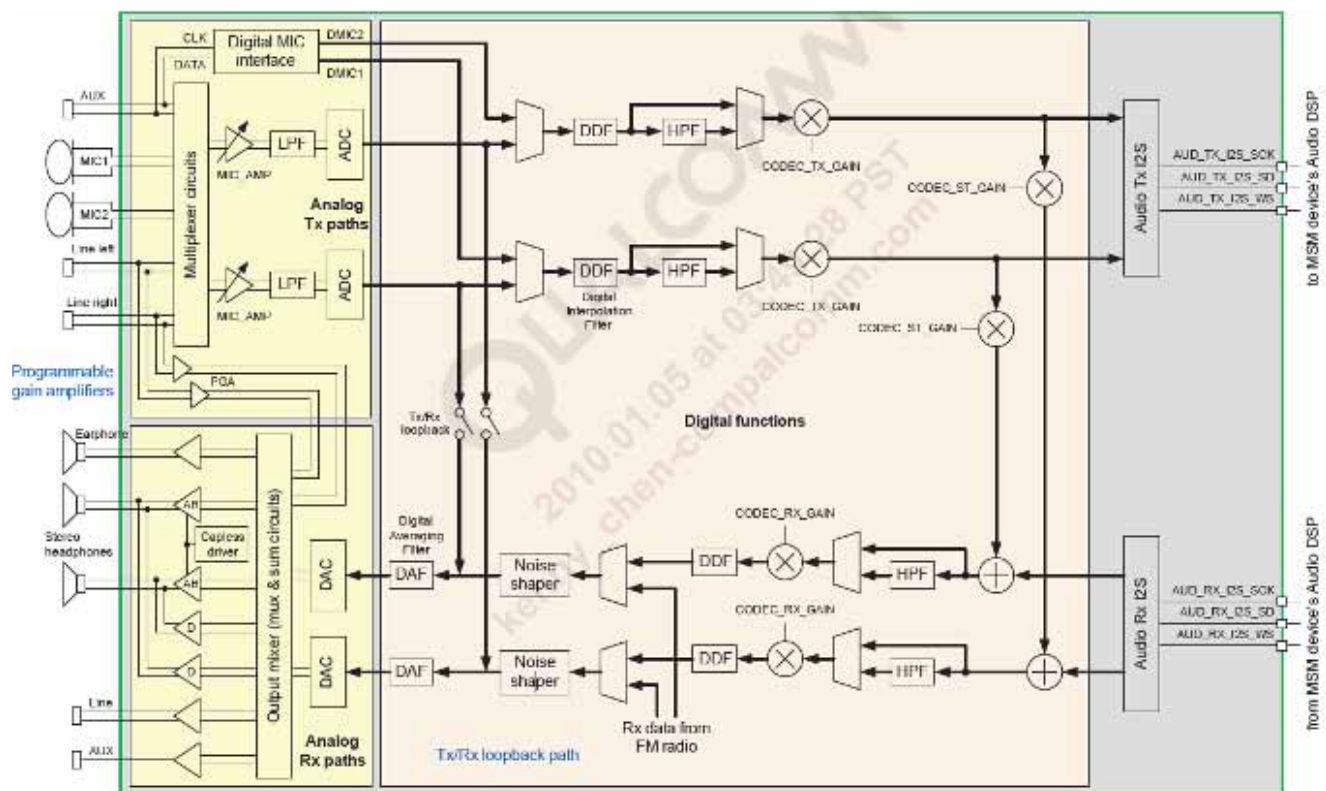


Figure 10 Audio block diagram

Internal audio


The internal audio components are used in these modes

	Hand Portable Mode	Headset Mode	Hand Free Mode
MIC1	X		X
MIC2	X	X	
MIC3			
EARPIECE	X		
SPEAKER			X
LINE_IN		X	
HPH_OUT		X	

FM radio interface


RM-801 supports FM RDS, I2C is the control bus from QTR8215. The line-up signal provides an analogue signal to QTR8215.

Output music to ear-piece or loud speaker.

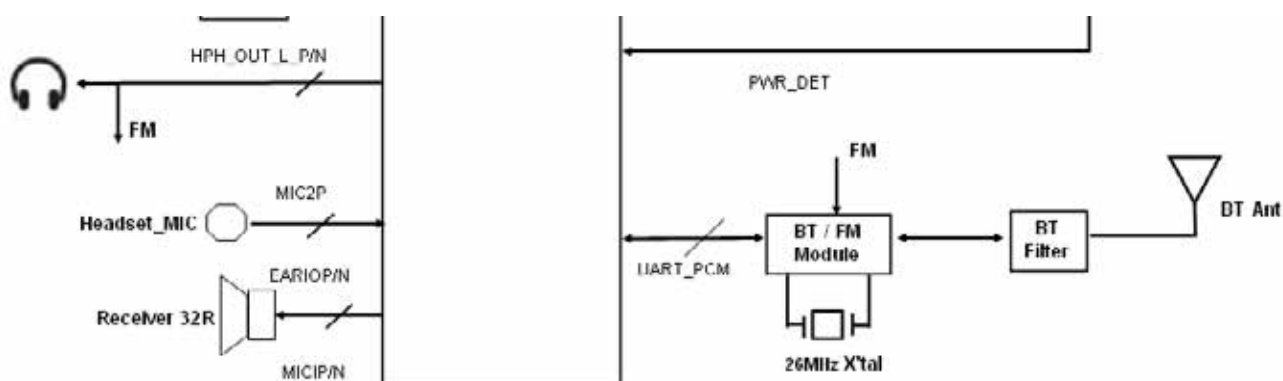

Bluetooth

The CSR chip Blue Core 6-ROM WLCSP is a single-chip radio and baseband IC for Bluetooth 2.4GHz systems including enhanced data rate(EDR) to 3Mbps. With the on-chip CSR Bluetooth software stack, it provides a fully compliant Bluetooth v2.1+ EDR specification system for data and voice communications.

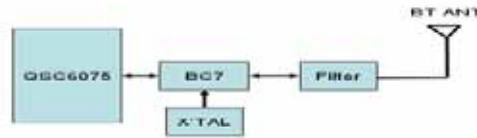

■ RF description

Receiver (RX)

An analogue signal is received by phone's antenna. The signal is converted to a digital signal and then transferred further to the baseband (e.g. to the earpiece).


The receiver functions are implemented in the QTR8215 RF block. Signals at different frequencies goes different path, and are therefore is processed by different components.

Transmitter (TX)



The digital baseband signal (e.g. from the microphone) is converted to an analogue signal, which is then amplified by amplifier and transmitted from the antenna. The frequency of this signal can be tuned to match the bandwidth of the system in use (e.g. WCDMA Band1 band).


The transmitter functions are implemented in the QTR8215 RF block. Even though WCDMA Band1 signals are sent via different components, the principles of the transmission are the same.

QTR8215System Module

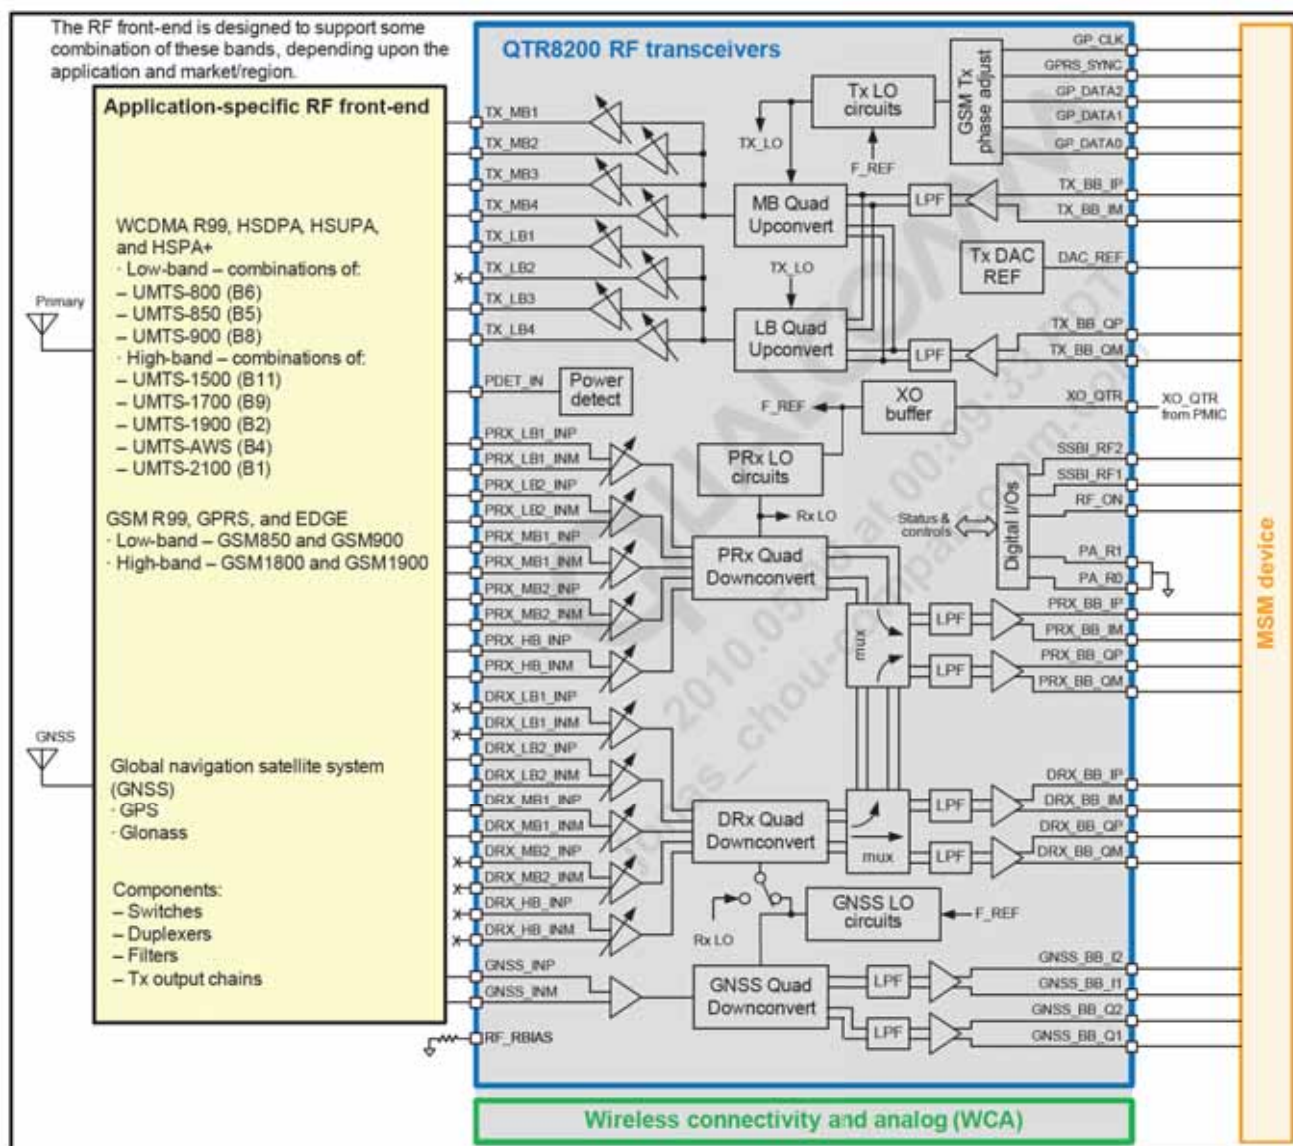


■ Phone Schematic

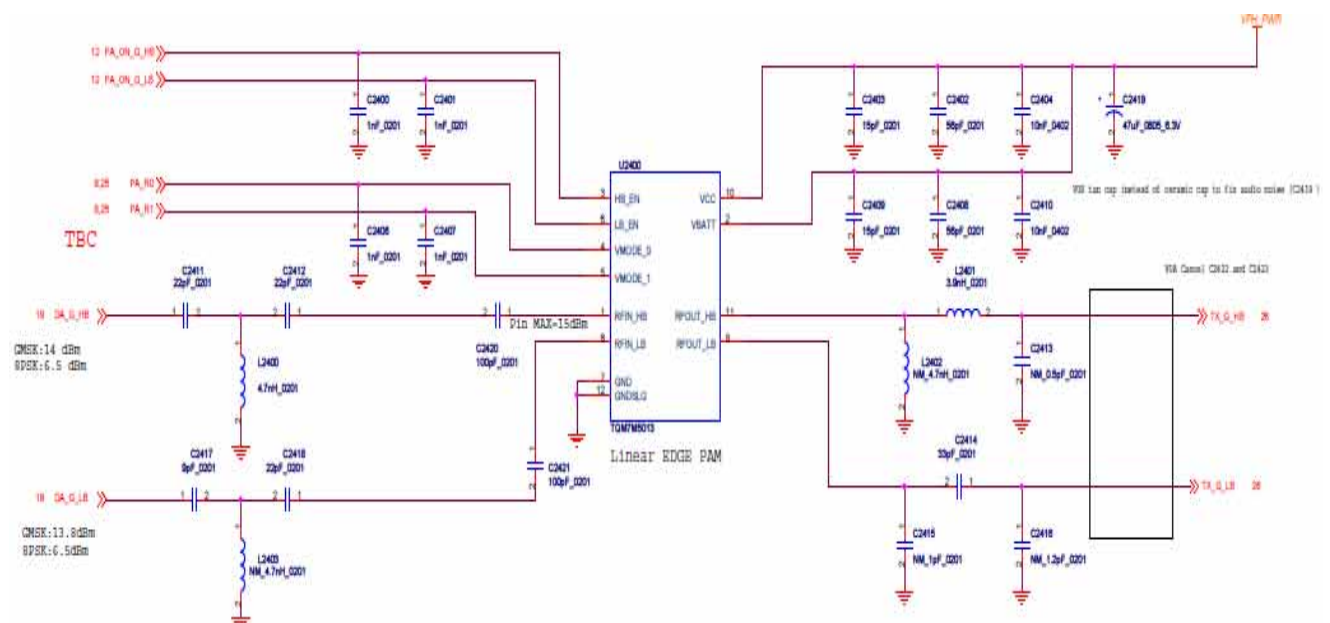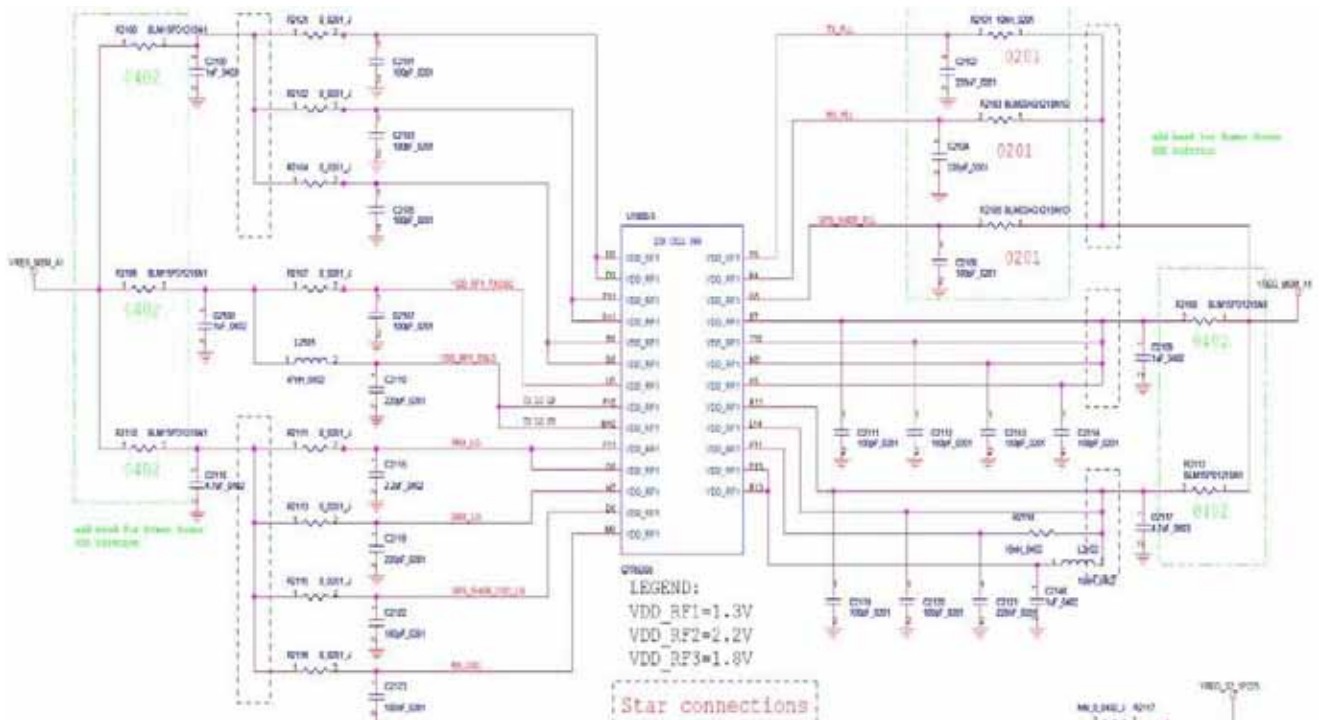




POWER MODE	PA 20	PA 21
LOW POWER	H	H
MEDIUM POWER	H	L
HIGH POWER	L	X

MODEL for Wnt72 [CXM355558R]	CTL A	CTL B	CTL C	CTL D	
Tba1	H	L	H	L	TRX 9.900
Tba2	H	H	H	L	TRX 11.1005
Tba3	H	L	H	H	TRX 10.8575
Tba4	H	H	H	H	TRX 11.4477
Tba5	L	L	H	H	TRX 11.1477
Ba1	L	L	L	H	GM050003
Ra2	L	H	H	L	XX G.1000
Ra3	L	H	L	L	XX G.1005
Ta1	H	H	L	L	TX G.18
Ta2	M	L	L	L	TX G.800

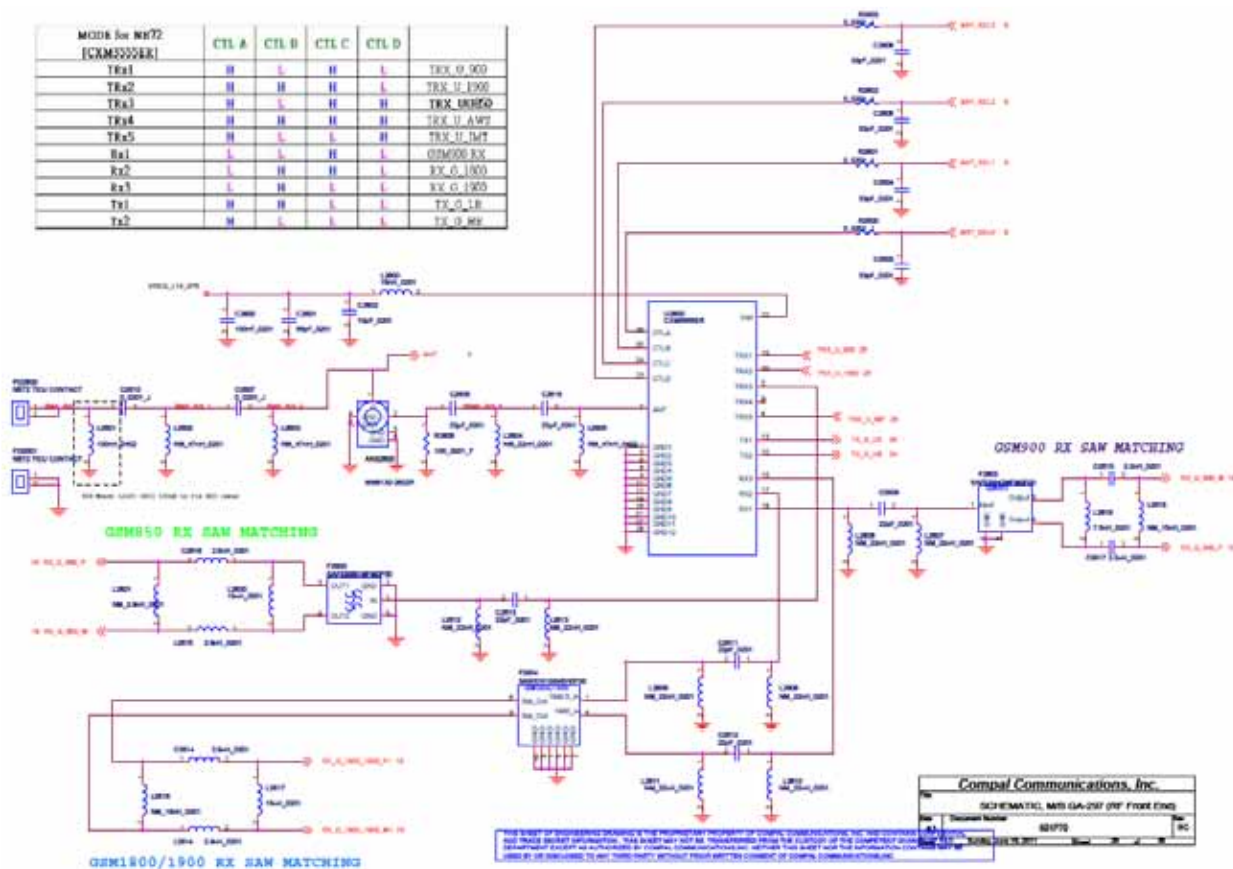

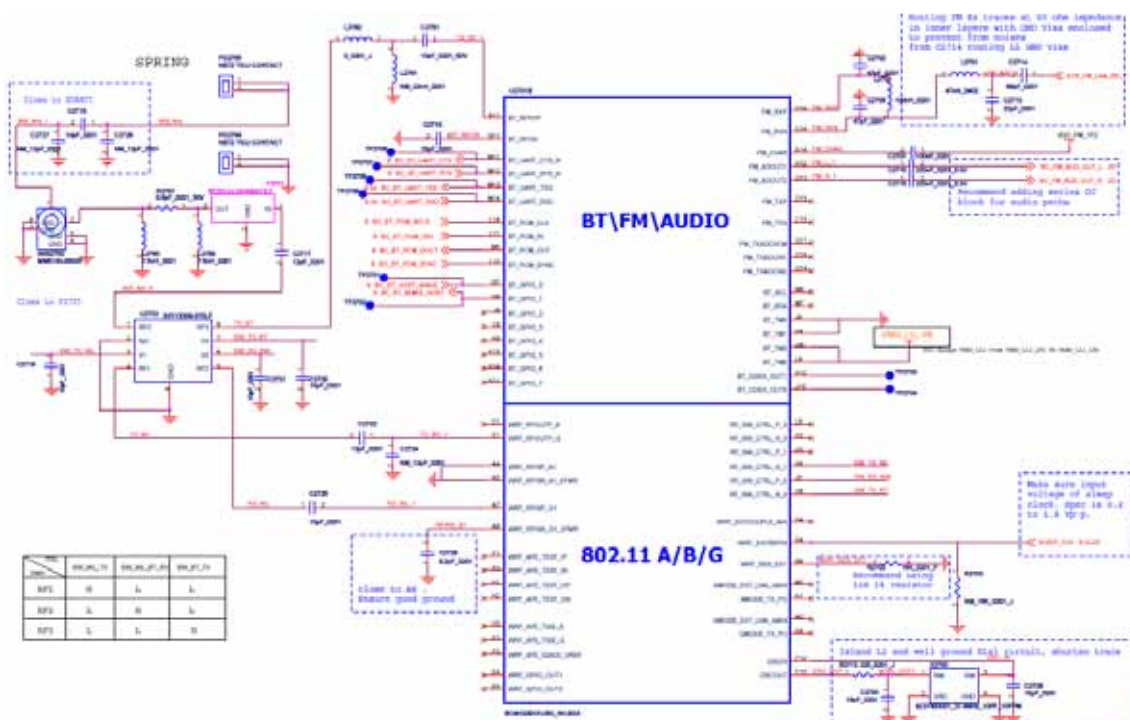

(This page left intentionally blank.)

Nokia Customer Care

Glossary

(This page left intentionally blank.)

A/D-converter	Analogue-to-digital converter
ACI	Accessory Control Interface
ADC	Analogue-to-digital converter
ADSP	Application DPS (expected to run high level tasks)
AGC	Automatic gain control (maintains volume)
ALS	Ambient light sensor
AMSL	After Market Service Leader
ARM	Advanced RISC Machines
ARPU	Average revenue per user (per month or per year)
ASIC	Application Specific Integrated Circuit
ASIP	Application Specific Interface Protector
B2B	Board to board, connector between PWB and UI board
BB	Baseband
BC02	Bluetooth module made by CSR
BIQUAD	Bi-quadratic (type of filter function)
BSI	Battery Size Indicator
BT	Bluetooth
CBus	MCU controlled serial bus connected to UPP_WD2, UEME and Zocus
CCP	Compact Camera Port
WCDMA	Code division multiple access
CDSP	Cellular DSP (expected to run at low levels)
CLDC	Connected limited device configuration
CMOS	Complimentary metal-oxide semiconductor circuit (low power consumption)
COF	Chip on Foil
COG	Chip on Glass
CPU	Central Processing Unit
CSD	Circuit-switched data
CSR	Cambridge silicon radio
CSTN	Colour Super Twisted Nematic
CTSI	Clock Timing Sleep and interrupt block of Tiku
CW	Continuous wave
D/A-converter	Digital-to-analogue converter
DAC	Digital-to-analogue converter
DBI	Digital Battery Interface
DBus	DSP controlled serial bus connected between UPP_WD2 and Helgo
DCT-4	Digital Core Technology
DMA	Direct memory access

DP	Data Package
DPLL	Digital Phase Locked Loop
DSP	Digital Signal Processor
DTM	Dual Transfer Mode
DtoS	Differential to Single ended
EDGE	Enhanced data rates for global/GSM evolution
EGSM	Extended GSM
EM	Energy management
EMC	Electromagnetic compatibility
EMI	Electromagnetic interference
ESD	Electrostatic discharge
FCI	Functional cover interface
FPS	Flash Programming Tool
FR	Full rate
FSTN	Film compensated super twisted nematic
GMSK	Gaussian Minimum Shift Keying
GND	Ground, conductive mass
GPIB	General-purpose interface bus
GPRS	General Packet Radio Service
GSM	Group Special Mobile/Global System for Mobile communication
HSDPA	High-speed downlink packet access
HF	Hands free
HFCM	Hands free Common
HS	Handset
HSCSD	High speed circuit switched data (data transmission connection faster than GSM)
HW	Hardware
I/O	Input/Output
IBAT	Battery current
IC	Integrated circuit
ICHAR	Charger current
IF	Interface
IHF	Integrated hands free
IMEI	International Mobile Equipment Identity
IR	Infrared
IrDA	Infrared Data Association
ISA	Intelligent software architecture
JPEG/JPG	Joint Photographic Experts Group

LCD	Liquid Crystal Display
LDO	Low Drop Out
LED	Light-emitting diode
LPRF	Low Power Radio Frequency
MCU	Micro Controller Unit (microprocessor)
MCU	Multiport control unit
MIC,	Microphone
MIDP	Mobile Information Device Profile
MIN	Mobile identification number
MIPS	Million instructions per second
MMC	Multimedia card
MMS	Multimedia messaging service
MTP	Multipoint-to-point connection
NTC	Negative temperature coefficient, temperature sensitive resistor used as a temperature sensor
OMA	Object management architecture
OMAP	Operations, maintenance, and administration part
Opamp	Operational Amplifier
PA	Power amplifier
PDA	Pocket Data Application
PDA	Personal digital assistant
PDRAM	Program/Data RAM (on chip in Tiku)
Phoenix	Software tool of DCT4.x and BB5
PIM	Personal Information Management
PLL	Phase locked loop
PM	(Phone) Permanent memory
PUP	General Purpose IO (PIO), USARTS and Pulse Width Modulators
PURX	Power-up reset
PWB	Printed Wiring Board
PWM	Pulse width modulation
RC-filter	Resistance-Capacitance filter
RF	Radio Frequency
RF	PopPort™ Reduced function PopPort™ interface
RFBUS	Serial control Bus For RF
RSK	Right Soft Key
RS-MMC	Reduced size Multimedia Card
RSS	Web content Syndication Format

RSSI	Receiving signal strength indicator
RST	Reset Switch
RTC	Real Time Clock (provides date and time)
RX	Radio Receiver
SARAM	Single Access RAM
SAW	filter Surface Acoustic Wave filter
SDRAM	Synchronous Dynamic Random Access Memory
SID	Security ID
SIM	Subscriber Identity Module
SMPS	Switched Mode Power Supply
SNR	Signal-to-noise ratio
SPR	Standard Product requirements
SRAM	Static random access memory
STI	Serial Trace Interface
SW	Software
SWIM	Subscriber/Wallet Identification Module
TCP/IP	Transmission control protocol/Internet protocol
TCXO	Temperature controlled Oscillator
Tiku	Finnish for Chip, Successor of the UPP
TX	Radio Transmitter
UART	Universal asynchronous receiver/transmitter
UEME	Universal Energy Management chip (Enhanced version)
UEMEK	See UEME
UI	User Interface
UPnP	Universal Plug and Play
UPP	Universal Phone Processor
UPP_WD2	Communicator version of DCT4 system ASIC
USB	Universal Serial Bus
VBAT	Battery voltage
VCHAR	Charger voltage
VCO	Voltage controlled oscillator
VCTCXO	Voltage Controlled Temperature Compensated Crystal Oscillator
VCXO	Voltage Controlled Crystal Oscillator
Vp-p	Peak-to-peak voltage
VSIM	SIM voltage
WAP	Wireless application protocol
WCDMA	Wideband code division multiple access

WD	Watchdog
WLAN	Wireless local area network
XHTML	Extensible hypertext markup language
Zocus	Current sensor (used to monitor the current flow to and from the battery)

(This page left intentionally blank.)